



2023-2024 INDUSTRIAL PRODUCT GUIDE

2023 - 2024

 **RUST-OLEUM**
CANADA

 **RUST-OLEUM**
CANADA

Industrial
PRODUCT GUIDE



200 Confederation Pkwy., Concord, ON L4K 4T8 | 1-800-387-3625 | www.rustoleum.ca

350790 0723

 **RUST-OLEUM**
CANADA

**CHANGE
THE WAY
YOU SEE
THINGS**

**TAP INTO
THE POTENTIAL**

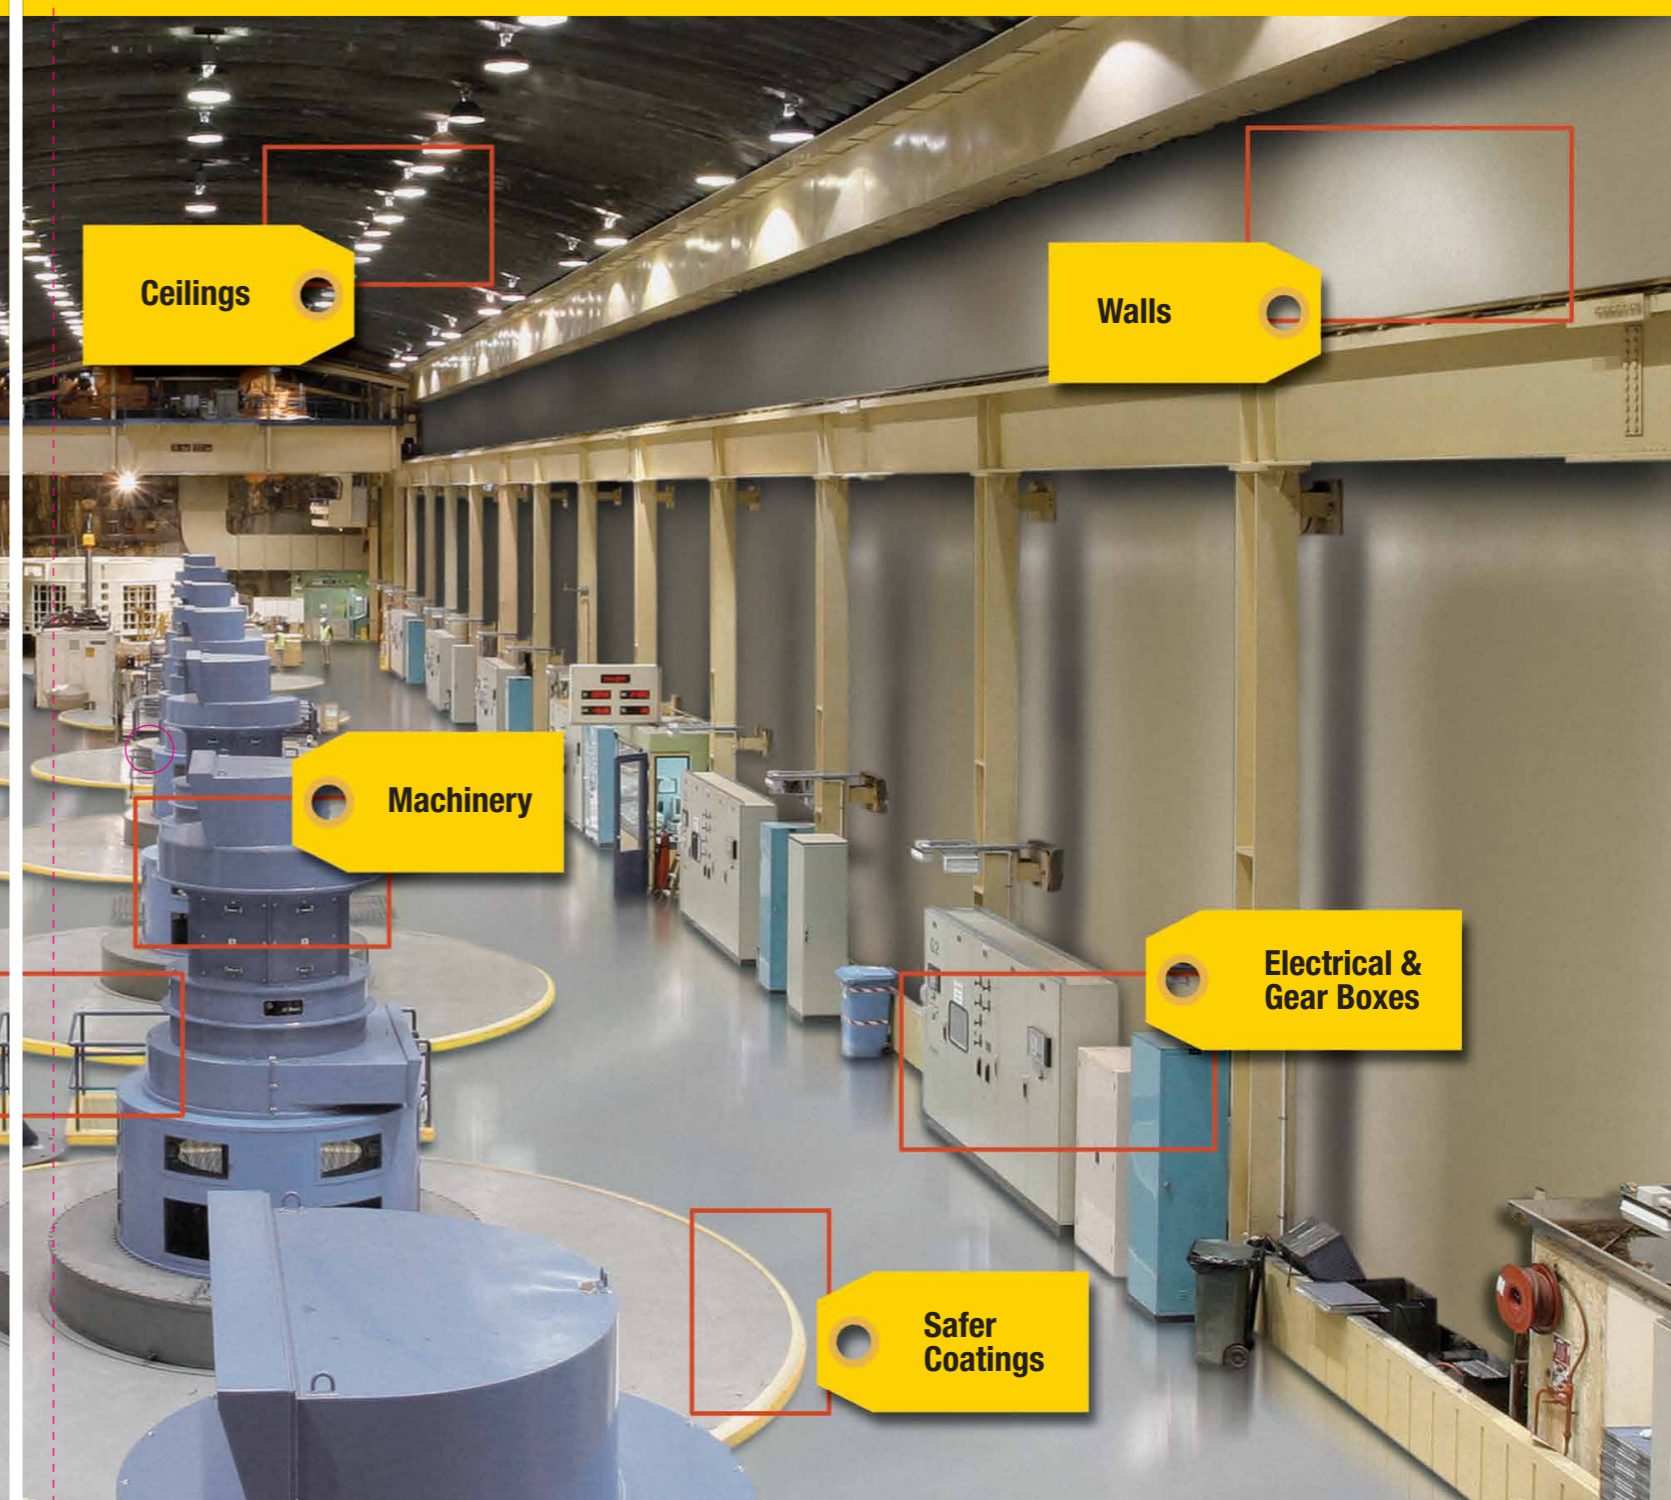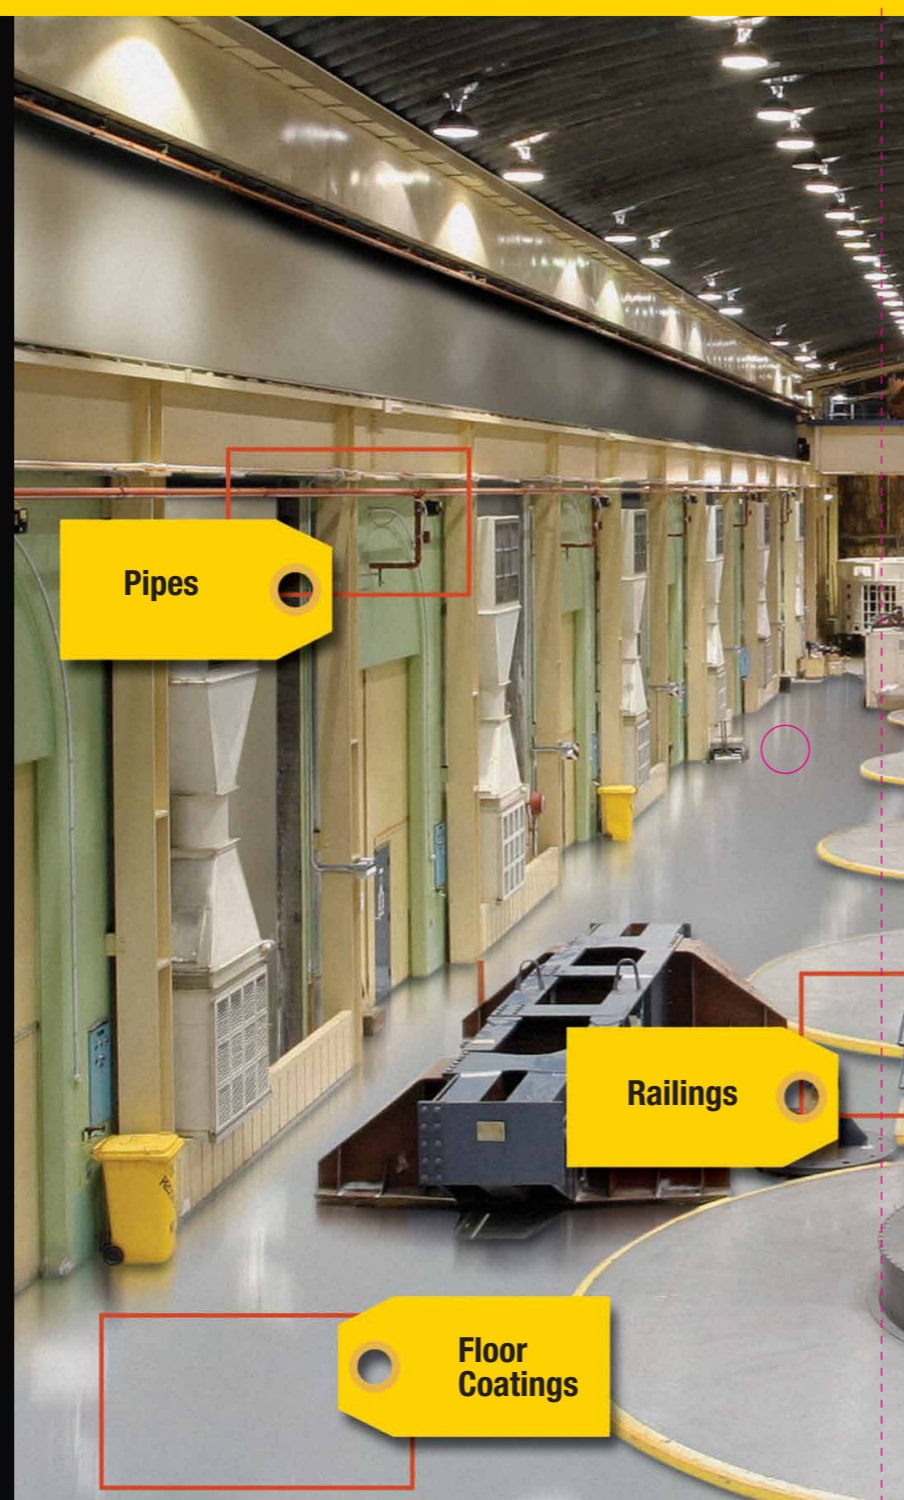

• TRUSTED QUALITY SINCE 1921 •

RUST-OLEUM®

INDUSTRIAL COATINGS

QUALITY PRODUCTS ARE JUST THE BEGINNING

Since 1921...

Rust-Oleum Corporation was founded on the principle of producing the highest quality labour saving coatings; and for nearly 100 years, Rust-Oleum has been the trusted name for superior solutions that promises long-lasting protection and superior coverage. Today, Rust-Oleum Corporation, backed by the resources of its parent company, RPM International Inc., is a worldwide leader in protective paints, coatings and value added products for both the home and industry.

Products That Work As Hard As You Do®

Rust-Oleum Industrial Brands is dedicated specifically to meeting the diverse needs of the industrial and commercial markets and provide solutions to problems caused by rust, heat, abrasion, chemicals and corrosive environments. This Product Guide showcases our distinct brands of protective paints, floor coatings and cleaners.



Products accompanied by this symbol carry a **TWO-YEAR RUST-PROOF GUARANTEE with maximum corrosion protection.**

NEW! Look for the QR codes throughout the catalogue to view our brand websites and videos. Open the camera app on your iPhone or Android. Point it at the QR code and follow the instructions on the screen.

www.rustoleum.ca/industrial



Scan the QR code to view the Rust-Oleum Industrial Home Page



Scan the QR code to view the Rust-Oleum Industrial Coatings and Flooring Videos



Scan the QR code to visit our Rust-Oleum Industrial LinkedIn Page to connect with us and get up to date information



Scan the QR code to view the Rust-Oleum Canada Technical Data Sheet Page

HIGH PERFORMANCE

The ultimate protection for industrial environments. Formulated with the highest quality pigments and resins, the High Performance brand of coatings has the highest paint solids in the industry. These proprietary formulations are designed for severe industrial environments and are backed by a Rust-Proof Guarantee. The High Performance brand is the foundation of Rust-Oleum Corporation.

MODERN MASTERS®

Modern Masters® is the world's number one supplier of high-end specialty water-based paint products. These products are perfect for Architects, Designers, DIY, Contractors and Decorative Painters.

COMMERCIAL

Don't let rust ruin your reputation. Sometimes looks are everything. Protect your company's assets with Rust-Oleum Commercial Coatings. Rust-Oleum Commercial Coatings are the perfect solution for all types of commercial environments. From light duty to the most demanding, Rust-Oleum coatings provide long-lasting rust protection, a professional, high gloss finish and no sags, drips or runs. For that first impression and lasting reputation, demand the durability of Rust-Oleum Commercial Coatings.

STRIPING & MARKING PAINT

Rust-Oleum offers a vast assortment of striping and marking paints for any job. From precision markings for utility locating or bold markings for a construction job, our marking paint selection is the most complete in the industry. When it comes to striping parking lots, athletic fields or walkways, our collection of trusted striping paints go the distance with long-lasting results you can count on every time.

SIERRA PERFORMANCE COATINGS

The only industrial strength epoxies and acrylics that have little solvent odour, low VOCs or hazardous air pollutants. These coatings dry fast and contain low solvents, letting you paint wherever you want, whenever you want. Sierra Performance coatings are ideal for mild to moderate industrial environments. Offered to you by Rust-Oleum, you can trust that they are also durable as they are safe.

GATOR®

Gator® incorporates all standards for sanding and finishing projects that any working enthusiast would expect as well as innovative new approaches to your basic sanding tasks. We produce a wide variety of performance designed, durable, and high-quality abrasives including sandpaper sheets, fiber discs, sanding belts, orbital sheets, hook & loop and stick-on sanding discs, sanding sponges, and our unique line of Zip® sanding products.

CONCRETE PREP, PATCH & REPAIR

Rust-Oleum's expertise in surface protection doesn't stop at metal. Our complete selection of concrete prep, patch and repair products are formulated to deliver contractor-grade protection and are easy to apply using in-house maintenance crews. Our concrete repair products cure fast to minimize downtime and provide lasting durability for long-term protection.

ANTI-SLIP SOLUTIONS

Rust-Oleum® has solutions to help keep your facilities, customers and employees safe. Step up your floor safety with SafeStep™ Anti-Slip products and SafeTex™ Floor Coatings. Easy to install and use — ready for whatever traffic comes their way. Rust-Oleum® knows the importance of safety and is proud to provide superior anti-slip offerings.

FLOOR COATINGS

Rust-Oleum's diverse product offering provides a cost effective, durable solution for every industry and every environment. Our range of products include Concrete Saver and Sierra Performance brands for application using in-house crews, to Concrete Protection Systems coatings and toppings for professional contractors. Whatever the floor coating project, Rust-Oleum has the right solution for you.

ROOFING

Rust-Oleum LeakSeal has innovated quality products that repair and beautify commercial and residential spaces. Rust-Oleum LeakSeal is proud to introduce its new roofing program complete with Roof Coatings, Patch & Repair, and Cleaners for commercial and residential roofs. Use on low and steep slope roofs, including commercial and residential properties, RVs, campers, porch awnings, barns, sheds & more.

JANITORIAL/SANITATION

Rust-Oleum manufactures a diverse arsenal of cost-effective and high-performance products for all cleaning needs. The Rust-Oleum product range includes Cleaners and Degreasers, Mould Remediation, Disinfectants, Rust Removers, Drain, Septic and more. Whatever the cleaning challenge, Rust-Oleum has the right solution for your janitorial and sanitation needs.

PRIMERS

Rust-Oleum Primers have a solution for every problem. From mould and mildew, to stains and protection, our wide range of high-performance Primers makes it easy to resolve common issues. Professional quality, fast-drying formulas make problem solving simple.

WALL PAINT

Rust-Oleum Paint + Primer Interior Paint is a low-odour, user-friendly pre-tinted formula that makes painting easy; washable and highly durable paint with excellent coverage and a great final finish. Simple and modern on-trend neutrals have been specially curated of suit any space; all hues will work with each other making the colour decision simple

MIRACLE SEALANTS®

The leader in professional-grade care and maintenance products for tile, grout, natural stone, brick and masonry surfaces. Premium-quality products rated #1 in performance and quality.

PRODUCT GUIDE CONTENTS

HIGH PERFORMANCE 9

SYSTEM	DESCRIPTION	PAGE
V2100 System	Rust-Preventive Enamel	10
Ultimate	Turbo Enamel	11
ROCALKYD	Direct to Metal Alkyd Enamel V7400	12
ROCACRYLIC	Direct to Metal Acrylic Enamel 3800	13
Noxyde®	Elastomeric Acrylic Coating	14
ROCEPOXY	Direct to Metal Epoxy Mastic 9100	15
ROCEPOXY	Direct to Metal Low Temperature Cure Epoxy 9200	16
ROCEPOXY	Coal Tar Epoxy C9578	16
ROCTHANE	Direct to Metal Urethane Mastic 9800	17
V2100 System	Galvanizing Compound	18
ROCALKYD	Cold Galvanizing Compound 7000	18
V2100 System	Rust Reformer	19
V2100 System	High Heat Spray	19
ROCALKYD	High Heat Coatings	20
Thinners	160 Epoxy Thinner	21
Thinners	190 Urethane Thinner	21
Thinners	633 Mineral Spirits Thinner	21
Thinners	641 Naphtha Thinner	21
Thinners	165 Water Immersion Thinner	21
Thinners	Compliant Thinner	21
Technical Data		22-23

MODERN MASTERS® 25

COMMERCIAL 27

SYSTEM	DESCRIPTION	PAGE
1600 System	Multi-Purpose Enamel	28
Alkyd Primer	Universal Alkyd Primer	29
Acrylic Primer	Universal Acrylic Primer	30
The Mule	Modified Urethane Latex Epoxy	31
RB1600 System	Green Rebar Epoxy	32
1600 System	Galvanizing Compound	32
LeakSeal™	Flexible Rubber Sealant	33

STRIPING & MARKING PAINT 35

SYSTEM	DESCRIPTION	PAGE
M1600/M1800 System	Precision Line Inverted Marking Paint	36
M1400 System	Construction Marking Paint	37
T1600 System	Aerosol Tree Marking Paint	38
MC1800 System	Inverted Marking Chalk	38
2300 System	Inverted Striping Paint	40
2300 System	Traffic Zone Striping Paint	40
S1600 System	Inverted Striping Paint	40
AF1600 System	Athletic Field Inverted Striping Paint	41
Striping & Marking	Companion Products	41

SIERRA PERFORMANCE 43

SYSTEM	DESCRIPTION	PAGE
Beyond™	Acrylic Enamel	44
MetalMax®	DTM Acrylic Enamel	45
S70 System	Water-Based Epoxy Primer	46
S60 System	Water-Based Epoxy Maintenance Coating	46

GATOR® 49

SYSTEM	DESCRIPTION	PAGE
Zip®	Hook & Loop Micro Sanding Kit	50
Zip®	Hook & Loop Detail Sanding Kit	50
Zip®	Hook & Loop Handy Block Sanding Kit	50
Zip®	Hook & Loop Handy Block Refill Sheets	51
Zip®	Speed Sheets™ Sander	51
Zip®	Speed Sheets™	52
Gator®	Rubber Sanding Block	53
Gator®	9"x11" All-Purpose Sanding Sheets	53
Gator®	9"x11" Premium Sanding Sheets	54
Gator®	9"x11" Waterproof Sanding Sheets	55
Gator®	9"x11" Metal Emery Cloth Sheets	55
Gator®	3"x5"x1" Premium Super Sanding Sponge	56
Gator®	3"x5"x1" Jumbo Sanding Sponges	56
Gator®	2-1/2"x5"x1" EdgeProtect Dual-Angle Sanding Sponges	57
Gator®	3"x5"x1" Jumbo and Dual-Angle Sanding Sponges	57
Gator®	Large Area Drywall Sanding Sponge	58
Gator®	Large Area Single Angle Drywall Sanding Sponge	58
Gator®	4-1/2"x5-1/2" Flexible Sanding Pads	58
Gator®	3"x4"x1" All-Purpose Sanding Sponges	59
Gator®	9"x11" Red Resin Sanding Sheets	60
Gator®	9"x11" Waterproof Sanding Sheets	60
Gator®	5" 8-Hole Hook & Loop Conversion Kit	61
Gator®	5" 8-Hole Hook & Loop Sanding Discs	61
Gator®	5" 5-Hole Hook & Loop Sanding Discs	62
Gator®	5" Stick-On Drill Mounted Backer Pad	62
Gator®	5" Stick-On Sanding Discs	62
Gator®	6" Stick-On DA Backer Pad	63
Gator®	6" Gold Stearate Stick-on Sanding Disc	63
Gator®	4-1/2" Angle Grinder Backer Pad	63
Gator®	4-1/2" Resin Fiber Disc	64
Gator®	4-1/2" Flap Disc	64
Gator®	4-1/2" Surface Conditioning Disc	64
Gator®	4-1/2" Stripping Wheel	65
Gator®	All-Purpose Clamp-On 1/4" Sanding Sheets	65
Gator®	Red Resin Clamp-On 1/3" Sanding Sheets	65
Gator®	Red Resin Clamp-On 1/4" Sanding Sheets	66
Gator®	Abrasive Cleaning Stick	66
Gator®	Red Resin Sanding Belts	67
Gator®	Red Resin Mouse™ Detail Sheets	67
Gator®	Ceramic Mouse™ Detail Sheets	68
Gator®	3" Ceramic Oscillating Detail Sheets	68
Gator®	2" Mini Conditioning Discs Kit	68
Gator®	Drum Sanding Kit	69
Gator®	4" Drill Mounted Stripping Wheel	69
Gator®	3-7/8" X 6" Multi-Surface Hand Stripping Tool Kit	69
Gator®	Drywall Clamp-On/Hook & Loop Sanding Tools	70
Gator®	Drywall Clamp-On Precut Sanding Screens	70
Gator®	Drywall Clamp-On Precut Sanding Sheets	71
Gator®	Drywall Hook & Loop Sheet Sanding Tools	71
Gator®	4-1/2"x10-1/2" Drywall Hook & Loop Precut Sanding Sheets	72
Gator®	Hook & Loop 9" Radial Sander	72
Gator®	Hook & Loop 9" Radial Sander Refill Sheets	72
Gator®	3"x5"x1" Drywall Sanding Sponges	73
Gator®	3"x10"x1" Large Area Drywall Sanding Sponge	73
Gator®	2-1/2"x5"x1" Drywall Angle Sanding Sponges	73

CONCRETE PREP, PATCH & REPAIR 75

SYSTEM	DESCRIPTION	PAGE
TurboKrete®	Concrete Patching Compound	76
TurboKrete®	All-Purpose Epoxy Repair	76
Joint Sealant	Flexible Joint Sealant	76
5499 System	Concrete Patching Compound	77
InstaPatch®	Concrete Repair System	77
Putty Patch™	Cement-Based Patching	77
Pourable Patch	Pourable Concrete Patching Compound	78
108 System	Cleaning & Etching Solution	78
Vapour Barrier	Water-Based Topside	80
Vapour Barrier	100% Solids Topside	80
Technical Data		81

ANTI-SLIP FLOOR COATINGS 83

SYSTEM	DESCRIPTION	PAGE
AS5600 System	Anti-Slip Floor And Deck Coating	84
AS5400 System	Anti-Slip One-Step Epoxy	84
AS6000 System	Anti-Slip Low Profile Epoxy	85
AS9100 System	Anti-Slip High Performance Epoxy	85
AS6500 System	Anti-Slip 100% Solids Epoxy	86
SafeStep™	Step Covers	88
SafeStep™	Step Edge	89
SafeStep™	Sheeting	89

FLOOR COATINGS 91

SYSTEM	DESCRIPTION	PAGE
Hard Surface Primer	Water-Based Epoxy Primer	92
5600 System	Acrylic Urethane Floor Paint	92
5800 System	Water-Based Urethane	93
6700 System	Extended Pot Life Epoxy	93
FinishKote 80	High Solids Polyaspartic Floor Coating	94
BuildKote	Polyurea Floor Coating Primer	94
Heavy Metal	Decorative Floor Coating	95
FastKote®	UV Stable Polyurea Floor Coating	95
200 Anti-Skid	Floor Coating Additive	96
UltraWear®	Additive	96
Durability Additive	Durability, Longevity & Anti-Slip	96
Decorative Vinyl Chips	Decorative Finish	97
Rust-Oleum Mixers & Rollers	Mixers & Rollers	97
Technical Data		97

ROOFING 99

SYSTEM	DESCRIPTION	PAGE
LeakSeal®	Water-Based Primer	100
LeakSeal®	Ultimate Wet Patch	101
LeakSeal®	Clear Roof Patch	101
LeakSeal®	Roof Repair Plastic Roof Cement	102
LeakSeal®	Roof Repair All Season	102
LeakSeal®	Gutter & Siding Sealant	102
LeakSeal®	Roof Patch Fabric Mesh	103
LeakSeal®	Aluminum Roof Coating - 7 Year	104
LeakSeal®	Elastomeric Roof Coat - 7 Year	105
LeakSeal®	Fibered Roof Coating	105
LeakSeal®	Roof And Foundation Coating	105
LeakSeal®	Foundation Membrane	106

JANITORIAL/SANITATION 109

SYSTEM	DESCRIPTION	PAGE
Concrobium®	Mold Control®	110
Concrobium®	Mold Stain Remover - 2 Part	110
Concrobium®	Fogger	111
Concrobium®	Fogger Intake Filter	111
Moldex®	Mold Killer	112
Moldex®	Instant Mold & Mildew Stain Remover	112
Moldex®	Mold & Mildew Non-Bleach Stain Remover	113
Krud Kutter®	Mould & Mildew Stain Remover	113
Krud Kutter®	Original Cleaner Degreaser	114
Mean Green®	Super Strength	114
Mean Green®	Industrial Strength	114
Concrobium®	Broad Spectrum Disinfectant II	116
Krud Kutter®	The Must For Rust	117
Krud Kutter®	The Must For Rust Remover Gel	117
Krud Kutter®	Calcium, Lime & Rust Stain Remover	118
Whink®	Rust Stain Remover	118
Whink®	Lime & Rust Remover	118
Whink®	Rustguard®	119
Rust-Oleum®	Rust Dissolver Jelly	119
Whink®	Hair Clog Blaster!®	120
Concrobium®	Carpet Shampoo	120
Krud Kutter®	Ultra Power Remover	121
Krud Kutter®	Graffiti Remover	121
Krud Kutter®	Oil Grabber® Stain Remover	121

PRIMERS 123

SYSTEM	DESCRIPTION	PAGE
Zinsser® Turbo™ Bulls Eye 1-2-3®	Water-Based Primer-Sealer - White	124
Zinsser® Turbo™ B-I-N®	Shellac Base Primer-Sealer	124
Zinsser® Turbo™ Cover Stain®	Oil-Based Primer-Sealer	125
Zinsser® Bulls Eye 1-2-3®	Water-Based Primer-Sealer - White	126
Zinsser® Bulls Eye 1-2-3®	Water-Based Primer-Sealer - Grey	126
Zinsser® Bulls Eye 1-2-3®	Water-Based Primer-Sealer - Deep Tint	126
Zinsser® Mould Stop	Water-Based Primer - White	127
Zinsser® Odour Killing	Water-Based Primer-Sealer - Clear	127
Zinsser® Bulls Eye	Water-Based Primer-Sealer	127
Zinsser® Bulls Eye Zero™	Water-Based Primer	128
Zinsser® B-I-N®	Shellac Base Primer-Sealer	128
Zinsser® B-I-N® Advanced	Synthetic Shellac	128
Zinsser® B-I-N® 2	Alkyd Primer-Sealer	129
Zinsser® Cover Stain®	Oil-Based Primer-Sealer	129
Zinsser® Odorless	Oil-Based Primer-Sealer	129
Zinsser® Bondz®	Urethane-Acrylic Maximum Adhesion Primer	130
Zinsser® Gardz®	Problem Surface Sealer	130
Zinsser® Vinyl & Plastic	Bonding Primer	130
Zinsser® Peel Stop® Plus	High Build Bonding Primer	131
Zinsser® Perma-White®	Mould & Mildew-Proof™ Water-Based Interior Paint	131
Zinsser® Ceiling Paint	Water-Based Stain-Blocker	132
Zinsser® MH Ready Patch™	Professional Spackling & Patching Compound	132
Zinsser® Watertite®	Mould & Mildew-Proof* Waterproofing Paint	133
Zinsser® Watertite® LX	Mould & Mildew-Proof* Latex Waterproofing Paint	133
Zinsser® Watertite®	Flexible Primer & Finish	134
Zinsser® Watertite®	Etch & Cleaner for Concrete & Masonry	134
Zinsser® Watertite®	Hydraulic Cement for Concrete & Masonry	135
Zinsser® Watertite®	Polyurethane Sealant for Concrete & Masonry	135
X-I-M®	Advanced® Technology Uma® Brand	136
X-I-M®	Peel Bond®	136

WALL PAINT 139

SYSTEM	DESCRIPTION	PAGE
Colour Spark™	Advanced Paint + Primer	140
Sure Colour™	Interior Paint + Primer	141

MIRACLE SEALANTS® 143

SYSTEM	DESCRIPTION	PAGE
Miracle Sealants® 511	Impregnator Sealer	144
Miracle Sealants® 511	Porous Plus Sealer	144
Miracle Sealants® 511	H2O Plus Sealer	144
Miracle Sealants® 511	Quartz Countertop Sealer	145
Miracle Sealants® 511	Grout Sealer Aerosol	145
Miracle Sealants®	Grout Sealer	146
Miracle Sealants®	Seal & Enhance	146
Miracle Sealants® 511	Kleen & Reveal	147
Miracle Sealants®	Heavy Duty Acidic Cleaner	147
Miracle Sealants®	Phosphoric Acid Cleaner	148
Miracle Sealants®	Tile & Stone Cleaner	148
Miracle Sealants®	Mira Brush Applicator	149

INDUSTRIAL COATINGS SELECTION GUIDE

METAL/STEEL APPLICATIONS

	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
SEVERE	Direct-To-Metal; high build; excellent adhesion and hiding; low temp. cure; ultimate protection of metal.	9800 System – DTM Urethane Mastic	17	Self-priming	SP1+SP3
	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	9100 System – DTM Epoxy Mastic	15	Self-priming	SP1+SP3
MODERATE	Low VOC, low HAPs, low solvent-odour; excellent corrosion, chemical and stain resistance	S60 System – Water-Based Epoxy Maintenance Coating	46	S70 System – Water-Based Epoxy Primer	Mod.: SP1+SP3 Sev.: SP1+SP6
	A single-component, high-build, water-based acrylic elastomeric suitable for use with only minimal surface preparation.	Noxyde®	14	Self-priming	SP1+ SP3 or WJ-4 5KPSI
MILD	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	3800 System – DTM Acrylic Enamel	13	3800 System – DTM Acrylic Enamel Primer or self-priming	SP1+SP3
	Low solvent odour, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	MetalMax® DTM Acrylic Urethane	45	Self-priming, or S70 Epoxy Primer in extreme situations	SP1+SP3
MILD	VOC <340 g/l; protects metal from rust and corrosion; superior colour and gloss retention; excellent hiding.	V7400 System – 340 VOC DTM Alkyd Enamel	12	V7400 System – 340 VOC Alkyd Enamel Primer or self-priming	SP1+SP3
	Low solvent odour, low VOC, low HAP; attractive and durable; extremely versatile topcoat; interior or exterior use.	Beyond™ Multi-Purpose Acrylic Enamel	44	MetalMax® Primer DTM Acrylic Urethane	SP1+SP3

GALVANIZED/ALUMINUM APPLICATIONS

	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
SEVERE	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	3800 System – DTM Acrylic Enamel	13	3800 System – DTM Acrylic Enamel Primer	SP1+SP3
MODERATE	Low solvent odour, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	MetalMax® DTM Acrylic Enamel	45	Self-priming, or S70 Epoxy Primer in extreme situations	SP1+SP3
MILD	Low solvent odour, low VOC, low HAP; attractive and durable; extremely versatile product; interior or exterior use.	Beyond™ Acrylic Enamel	44	MetalMax® Primer	SP1+SP3
	95% pure zinc in dry film; maximum corrosion resistance; excellent adhesion.	7000 System – Cold Galvanizing Compound	18	Self-priming	SP1+SP3

CONCRETE/MASONRY APPLICATIONS

	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
MOST SEVERE	SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 81.				
SEVERE	High build; excellent adhesion and hiding; low temp. cure.	9800 System – DTM Urethane Mastic	17	9100 System DTM Epoxy Mastic	Chemical clean or abrasive blast
MODERATE	Superior long-term solvent, chemical and abrasion resistance.	9100 System – DTM Epoxy Mastic	15	Self-priming	Chemical clean or abrasive blast
MILD	No solvent odour, zero VOC, zero HAP; excellent corrosion, chemical and stain resistance.	S60 System – Epoxy Maintenance Coating	46	Self-priming	Chemical clean or abrasive blast
	Resists blistering; low temp./high humidity application.	3800 System – DTM Acrylic Enamel	13	Self-priming	Chemical clean

* Minimum surface preparation required.

See Technical Data Sheets for detailed product information.

MILD ENVIRONMENTS

Outdoor weathering, mild industrial fumes and normal humidity with mould and mildew conditions.

MODERATE ENVIRONMENTS

Frequent fumes and spills of mild chemicals, occasional product spills, occasional chemical cleaning. Intermittent high humidity, moisture, mould and mildew conditions.

SEVERE ENVIRONMENTS

Frequent fumes and spills of strong chemicals (acids, alkalis and solvents), high humidity and moisture conditions. Frequent product spills and frequent chemical cleaning.

FLOORING APPLICATIONS

	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
CONCRETE					
MOST SEVERE	SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 75.				
MOD. SEV.	2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.	6700 System – Extended Pot Life Epoxy	93	Self-priming or S6511 Penetrating Prime & Seal™ Primer	Chemical clean and abrasive blast or acid etch
	Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.	9100 System – DTM Epoxy Mastic	15	Self-priming	Chemical clean and abrasive blast or acid etch
MILD MOD.	Low odour, resists lightweight rubber wheel traffic, mild stains, mildew and eliminates dusting.	5600 System – Acrylic Urethane Floor Paint	92	Self-priming	Clean/degrease and hand tool or power tool clean
STEEL DECK					
SEV.	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	9100 System – DTM Epoxy Mastic	15	Self-priming	SP1+SP3
ANTI-SLIP					
SEVERE	For continuous vehicle and equipment traffic; strong chemical exposure.	AS6500 System – Anti-Slip 100% Solids Epoxy	86	Self-priming	SP1 and abrasive blast or acid etch
	For heavy vehicle and equipment traffic; strong chemical exposure.	AS9100 System – Anti-Slip High Performance Epoxy	85	Self-priming	SP1 and abrasive blast or acid etch
MOD.	For heavy foot traffic and/or light vehicle traffic.	AS5400 System – Anti-Slip One-Step Epoxy	84	Self-priming	SP1 and abrasive blast or acid etch
	For barefoot and light recreational pedestrian traffic; low odour.	AS6000 System – Anti-Slip Low-Profile Epoxy	85	Self-priming	SP1 and abrasive blast or acid etch
	For mild industrial environments; fast dry, low odour	AS5600 System – Anti-Slip Low-Medium Profile Acrylic	84	Self-priming	SP1 and abrasive blast or acid etch

WATER-IMMERSION ENVIRONMENTS

	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
SEVERE	Apply above 15°C (60°F). Not recommended for potable water tanks. Use with 9102402.	9100 System – DTM Epoxy Mastic	15	Self-priming	SP1+SP10
	Protects against severe abrasion, strong chemicals and non-potable water immersion.	C9578 System – Coal Tar Epoxy	16	Self-priming	SP1+SP10
	Tank of 3,000 gallons minimum.	9200 System – for Potable Water	16	Self-priming	SP1+SP10

WALLS, DOORWAYS, TRIM

	FEATURES	RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
MODERATE	No solvent odour, low VOC, low HAP; high durability epoxy for use in extreme areas.	S60 System – Epoxy Maintenance Coating	46	Sierra Acrylic Primer	SP1+SP3
	No solvent odour, low VOC, low HAP; attractive; durable; extremely versatile; interior or exterior use.	Beyond™ Acrylic Enamel	44	Self-priming or Sierra Acrylic Primer	SP1+SP3
	No solvent odour, low VOC, low HAP; attractive; durable; extremely versatile; interior or exterior use.	The Mule (Modified Urethane Latex Epoxy)	31	Universal Acrylic Primer	SP1+SP3

* Minimum surface preparation required.

INDUSTRIAL COATINGS CHEMICAL & CORROSION RESISTANCE

● EXCELLENT RESISTANCE

The colour and film integrity of the coating is generally unaffected by exposure to this condition. Long-term protection can be expected.

▲ GOOD RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition. Colour and gloss may be slightly affected with longer exposure; however, long-term protection can be expected.

◆ FAIR RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition, however colour and gloss will be affected with longer exposure.

■ NOT RECOMMENDED











Film integrity and colour are affected by exposure to this condition, greatly reducing protection.


CHEMICAL & CORROSION RESISTANCE GUIDE	CORROSIVE CONDITIONS								FUMES, SPILLAGE & SPRAYS								IMMERSION			
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOLD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	CONTINUOUS WET HEAT RESISTANCE 125°F (52°C)		
																		FRESH WATER	SALT WATER & BRINE	SEWAGE
HIGH PERFORMANCE																				
V7400 System – DTM 340 VOC Alkyd Enamel	▲	●	●	■	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
3800 System – DTM Acrylic Enamel	●	●	●	●	▲	■	93°C 200°F	▲	●	▲	■	▲	■	▲	●	■	▲	■	■	■
9100 System – DTM Epoxy Mastic	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	●	▲	●	●	●	●	●	1
C9578 System – Coal Tar Epoxy	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	●	●	●
9200 System – Potable low temp water coating	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	●	●	●
7000 System – Cold Galvanizing Compound	●	●	●	■	▲	■	177°C 350°F	▲	▲	▲	■	■	■	▲	●	▲	▲	■	■	■

¹ Use with 9102402 Immersion Activator.

CHEMICAL & CORROSION RESISTANCE GUIDE	CORROSIVE CONDITIONS								FUMES, SPILLAGE & SPRAYS								IMMERSION			
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOLD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	CONTINUOUS WET HEAT RESISTANCE (52°C) 125°F		
																		FRESH WATER	SALT WATER & BRINE	SEWAGE
MATHYS®																				
Noxyde®	●	●	●	●	●	▲	107°C 225°F	●	●	▲	◆	▲	▲	▲	◆	◆	◆	■	■	■
SIERRA PERFORMANCE™																				
Beyond™ Acrylic Enamel	●	●	●	●	●	■	—	▲	▲	●	■	▲	■	▲	▲	■	■	■	■	
MetalMax® DTM Acrylic Enamel	●	●	●	●	●	■	—	●	●	●	▲	▲	▲	▲	▲	▲	▲	■	■	■
S60 System – Epoxy Maintenance Coating	▲	●	●	●	●	▲	—	●	●	●	▲	●	▲	●	▲	▲	■	■	■	
CONCRETE PREP, PATCH & REPAIR																				
TurboKrete® Concrete Patching Compound	▲	●	●	●	●	●	93°C 200°F	●	●	●	●	▲	◆	●	●	▲	●	●	▲	
ANTI-SLIP SOLUTIONS																				
AS5400 System – Anti-Slip One-Step Epoxy	▲	●	▲	▲	●	●	—	●	●	●	●	■	●	●	●	●	■	■	■	
AS6000 System – Anti-Slip Low-Profile Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	■	●	▲	▲	▲	▲	■	■	
AS6500 System – Anti-Slip 100% Solids Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	▲	▲	▲	▲	▲	■	■	■	
AS9100 System – Anti-Slip High Performance Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	▲	▲	▲	▲	▲	■	■	■	
CONCRETE SAVER®																				
5600 System – Acrylic Urethane Floor Paint	●	▲	●	●	▲	■	93°C 200°F	▲	▲	▲	■	▲	■	▲	●	◆	■	■	■	
6700 System – Extended Pot Life Epoxy	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■

SAFETY COLOUR CODING & PIPE IDENTIFICATION GUIDES

SAFETY COLOUR CODING GUIDE		
Based on the original OSHA code.		
	EMERGENCY	Use RED for the identification of fire protection equipment and apparatus, danger and stop.
	WARNING	Use ORANGE for designating dangerous parts of machines or energized equipment which may cut, crush, shock, or otherwise injure, and to emphasize such hazards when enclosure doors are open or removed, or when gear, belt or other guards around moving equipment are open or removed, exposing unguarded hazards.
	CAUTION	Use YELLOW for designating caution and for marking physical hazards such as striking against, stumbling, falling, tripping and "caught in between". Solid yellow, and yellow with black stripes or checkers should be used interchangeably, using the combination which will attract the most attention in the particular area.
	SAFETY EQUIPMENT	Use GREEN or similar colour for designating safety and the location of First Aid equipment (other than firefighting equipment). Green background with a white cross is accepted as identifying First Aid equipment.
	SAFETY INFORMATION	Use BLUE for identification of safety information used on informational signs and bulletin boards. In railroad areas only, blue shall be the colour for designating caution, limited to warning against the starting, the use of, or the movement of equipment under repair or being worked on.
	TRAFFIC/ HOUSEKEEPING	Use BLACK & WHITE to designate traffic and housekeeping markings. Solid white, solid black, single colour striping, alternate stripes of black and white or black and white checkers should be used in accordance with local conditions. (Purple, grey and brown may be used to accentuate colour contrast and make other colours more visible.)
IDENTIFICATION OF PIPING SYSTEMS		
Complies with the American National Standards Institute ANSI A13.1-1981 recommendations.		
	FIRE PROTECTION & SPRINKLER PIPING	RED is for ANSI Class F-FIRE. This classification includes sprinkler systems and other fire protection equipment.
	DANGEROUS MATERIALS	YELLOW is for ANSI Class D. This group includes materials which are hazardous to life or property because they are easily ignited, toxic, corrosive at high temperatures and pressures, produce poisonous gas or are themselves poisonous.
	SAFE MATERIALS	GREEN is for ANSI Class S. This group includes those materials involving little or no hazard to life or property in their handling.
	PROTECTIVE MATERIALS	BLUE is for ANSI Class P. This group includes materials which are piped through plants for the express purpose of being able to prevent or minimize the hazard of dangerous materials.

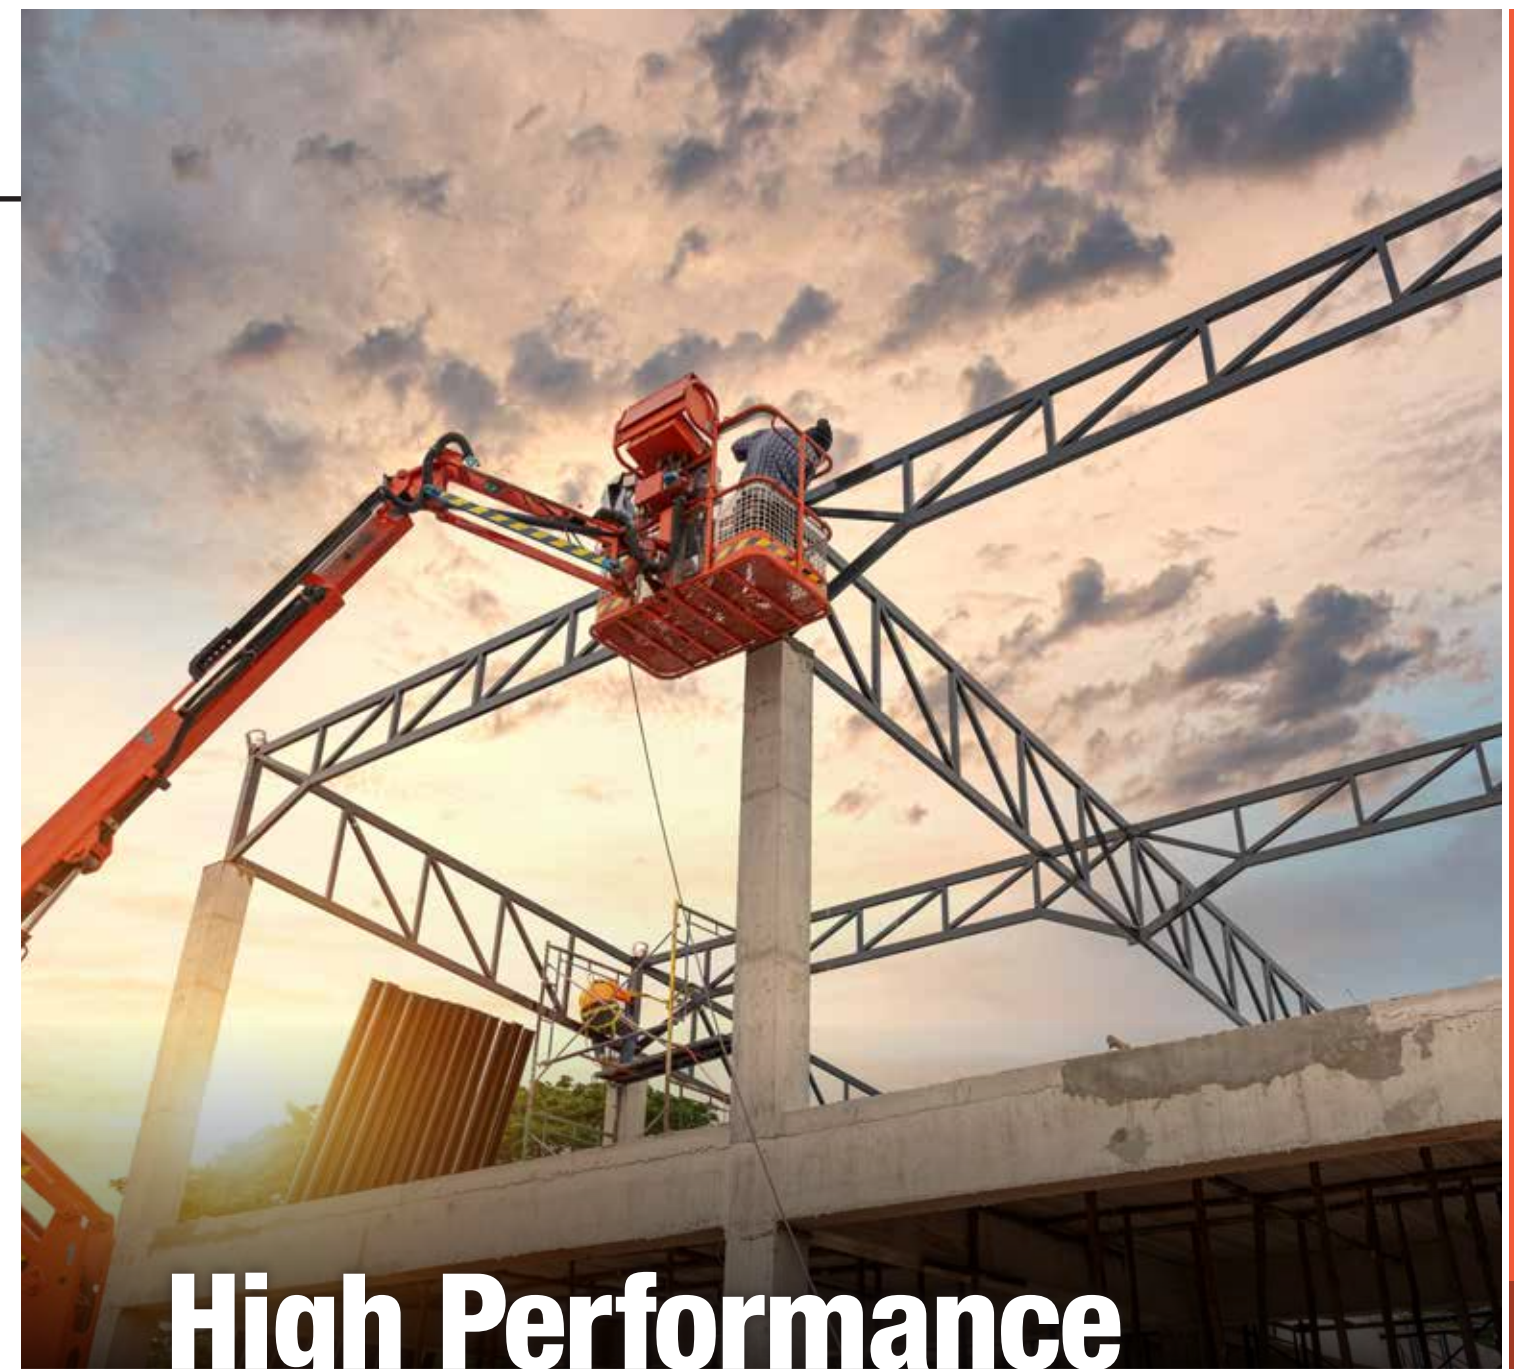

High Performance

Get ultimate protection in industrial environments with long-lasting, labour-saving coatings that provide generous coverage and ultra-durable results — plus the highest paint solids in the industry.



ALKYD



FOR USE ON:

- Structural steel
- Handrails
- Piping & storage tanks
- Equipment & machinery

V2100 SYSTEM RUST-PREVENTIVE ENAMEL

The ultimate spray paint for industrial applications is Rust-Oleum High Performance V2100 System Rust Preventative Spray. This advanced formula provides the best-possible corrosion protection with easy, one-coat coverage and long-lasting colour, gloss and durability.

- **Tough, professional finish—superior resistance to chipping, cracking and peeling**
- High-output tip covers 50% faster; dries in only 20 minutes to touch
- Withstands heat to 93°C (200°F)
- Most colours match the V7400 System for convenient touch-ups
- New any-angle spray can be sprayed in any direction, even upside down
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE



COLOURS (425 g)

- V2170838 Almond
- V2171838 Tan
- V2175838 Chestnut Brown
- V2125838 Deep Blue
- V2123838 Light Blue
- V2137838 Dark Green
- V2134838 Bright Green
- V2138838 Hunter Green
- V2147838 Industrial Yellow
- V2164838 Bright Red
- V2187838 Dark Machine Grey
- V2184838 Dove Grey
- V2183838 Light Machine Grey
- V2188838 Smoke Grey
- V2115838 Silver Aluminum (425 g)
- V2119838 Stainless Steel (425 g)
- V2179838 Gloss Black
- V2177838 Semi-Gloss Black

COLOURS (425 g)

- V2178838 Flat Black
- V2192838 Gloss White
- 209567 Semi-Gloss White
- V2190838 Flat White
- V2196838 Fleet White
- V2102838 Crystal Clear (396 g)

SAFETY COLOURS (425 g)

- V2124838 Safety Blue
- V2133838 Safety Green
- V2155838 Safety Orange
- V2167838 Safety Purple
- V2163838 Safety Red
- V2143838 Safety Yellow

FLUORESCENTS (425 g)

- 2233838 Fluorescent Green
- 2255838 Fluorescent Orange
- 2264838 Fluorescent Red
- 2242838 Fluorescent Yellow

EQUIPMENT (425 g)

- 209713 John Deere Green
- 209714 John Deere Yellow
- 209715 Caterpillar Yellow (old)
- 209717 Int'l Harvester Red
- 209718 Ford Blue
- V2148838 Equipment Yellow
- V2156838 Equipment Orange

PRIMERS (425 g)

- V2169838 Red Primer
- V2182838 Grey Primer
- 209566 White Clean Metal Primer

COMPANION PRODUCTS

241526 Comfort Grip

HARD HAT



Since 1979 Hard Hat industrial aerosols have been the core and foundation of our industrial V2100 System aerosols. After moving away from Hard Hat branding in 2001, our iconic Hard Hat logo has officially returned to our family of Industrial Brands. With the implementation of our new branding across our brands, we wanted to bring back a piece of nostalgia by reinstating our flagship Hard Hat branding that started it all.

Spray Paints, Marking & Striping Paints

ALKYD



FOR USE ON:

- Structural steel
- Handrails
- Piping & storage tanks
- Equipment & machinery

ULTIMATE TURBO ENAMEL

Rust-Oleum® ULTIMATE Turbo Enamel with spray up to 25 cm (10") wide allows for faster project completion making it ideal for large projects. This ULTIMATE formula provides the best-possible corrosion protection with easy application, long-lasting colour, gloss and durability.

- **The speed and quality of professional spray equipment without the hassle**
- Applies easily and dries fast to a tough, attractive finish
- Superior coverage, colour and gloss retention
- 4 times faster than traditional spray paints
- 656 g Spray

COLOURS (656 g)

- 352466 Gloss White
- 352467 Gloss Black

APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE



Scan the QR code to view the Ultimate Turbo video

ALKYD



FOR USE ON:

- General plant maintenance
- Machinery, equipment and structural steel
- Pipes, metal cabinets and lockers
- Railings, trim, doors and gates
- Vents and outdoor signage
- Water towers, agriculture and drilling
- Coastal applications
- Vehicle refinishing

**ROCALKYD
DIRECT TO METAL ALKYD
ENAMEL V7400**

Get outstanding protection and colour with the lower-VOC version of Rust-Oleum's original rust-preventative direct-to-metal (DTM) coating. Our High Performance V7400 System 340 VOC DTM Alkyd Enamel outperforms other brands in corrosion resistance and coverage.

- **High-gloss finish; one-coat coverage; dries tack-free in 2-4 hours**
- Resists chipping, fading, weathering
- Protects against mild chemicals — ideal for moderate to slightly severe industrial environments
- Two-year rust-proof guarantee — maximum corrosion protection
- Achieve maximum performance by starting with a V7400 System primer

APPLICATION

SUBSTRATE

VOC g/l

VOC <340

Covers: 21.37-49.24 m²
(230-530 ft²) per 3.7 L



COLOURS (3.79 L)

- 245308 Almond
- 245382 Dunes Tan
- 245380 Chestnut Brown
- 245388 Forest Green
- 245500 Old Caterpillar Yellow
- 245489 New Caterpillar Yellow
- 245409 Machine Tool Grey
- 245443 Navy Grey
- 245484 Silver Grey
- 245309 Aluminum *<500 g/l
- 245403 High Gloss Black
- 245387 Flat Black
- 245483 Semi-Gloss White
- 323807 Semi-Gloss Black
- 245533 Flat White
- 245406 High Gloss White
- 245381 Clear (Clear-Sele®)

COLOURS (SATIN) (3.79 L)

- 323808 Satin Black
- 323817 Satin White

SAFETY COLOURS (3.79 L)

- 245474 Safety Blue
- 245476 Safety Green
- 245477 Safety Orange
- 245478 Safety Red
- 245479 Safety Yellow

TINT BASES (HIGH-GLOSS) (3.79 L)

- 245515 High Gloss Red
- 245516 High Gloss Yellow
- 245517 High Gloss Masstone
- 245518 High Gloss Deep
- 245519 High Gloss Light

TINT BASES (SEMI-GLOSS) (3.79 L)

- 323815 Semi-Gloss Masstone
- 323809 Semi-Gloss Deep
- 323813 Semi-Gloss Light

TINT BASES (SATIN) (3.79 L)

- 323816 Satin Masstone
- 323810 Satin Deep
- 323814 Satin Light

COLOURS (18.9 L)

- 245405 High Gloss Black
- 245407 High Gloss White
- 245444 Navy Grey
- 245485 Silver Grey

SAFETY COLOURS (18.9 L)

- 245475 Safety Blue
- 245480 Safety Yellow

TINT BASES (HIGH-GLOSS) (18.9 L)

- 245530 High Gloss Masstone
- 245531 High Gloss Deep
- 245532 High Gloss Light

ACRYLIC



FOR USE ON:

- Trim
- Structural steel
- Machinery
- Heavy equipment

**ROCACRYLIC
DIRECT TO METAL ACRYLIC
ENAMEL 3800**

Rust-Oleum 3800 System DTM Acrylic Enamel is a fast dry, water-based finish that contains less than 250 g/LVOC for indoor or outdoor direct-to-metal (DTM) applications. It delivers excellent corrosion resistance and will protect surfaces exposed to mild to moderate environments.

- **Quick 15 minute dry time**
- Excellent corrosion resistance
- Direct-to-metal (DTM) coating — no primer required; good adhesion and excellent one-coat coverage, including smooth surfaces
- 250 g/L VOCs, water-based
- Applies with very little brush drag; lays out evenly when applied by roller
- Two-year rust-proof guarantee — maximum corrosion protection

APPLICATION

SUBSTRATE

VOC g/l

VOC <250

Covers: 13.94-25.5 m²
(150-275 ft²) per 3.79 L



COLOURS (GLOSS) (3.79 L)

- 314389 White
- 314388 Navy Grey
- 314387 Black
- 315506 Silver Grey
- 315509 Forest Green

SAFETY COLOURS (GLOSS) (3.79 L)

- 314209 Safety Blue
- 314410 Safety Red
- 314409 Safety Yellow
- 314407 Safety Green
- 315510 Safety Orange

COLOURS (FLAT) (3.79 L)

- 340657 Flat White
- 340656 Flat Black

COLOURS (SATIN) (3.79 L)

- 350412 Satin Black

TINT BASES (GLOSS) (3.79 L)

- 314592 Masstone
- 314593 Deep
- 314594 Light

TINT BASES (SEMI-GLOSS) (3.79 L)

- 324169 Masstone
- 324168 Deep
- 324167 Light

COLOURS (GLOSS) (18.9 L)

- 316534 Black

TINT BASES (GLOSS) (18.9 L)

- 316520 Masstone
- 316519 Deep
- 316518 Light

TINT BASES (SEMI-GLOSS) (18.9 L)

- 324172 Masstone
- 324171 Deep
- 324170 Light



ACRYLIC



FOR USE ON:

- Structural steel & bridges
- Machinery & equipment
- Areas with heavy corrosion
- Tank exteriors, metal roofs & cladding
- Ideal for anywhere that edge coverage is essential and high protection, adhesion or elasticity is needed

NOXYDE® ELASTOMERIC ACRYLIC COATING

For ultra-rugged protection in aggressive environments, choose Noxyde Elastomeric Acrylic Coating. This heavy-duty, water-based formula provides one-coat coverage and flexible durability on new or minimally prepared steel, metals and concrete.

- **Resists corrosion, rust and water — even in severe marine environments¹; 10-year warranty²**
- 200% elasticity — bridges small cracks, moves with structure, protects edges
- Performs like zinc/epoxy coatings without the need to abrasive-blast clean
- Single-component, self-priming, high-build; minimal surface prep required

COLOURS (18.9 L)

283092 Red	283086 Blue Grey
283089 Reseda Green	283095 Gravel Grey
283093 Blue	283085 Off White
283097 Brown	283091 Black
283088 Beige Grey	283090 White
283094 Grey Green	329514 Silver Grey

APPLICATION

SUBSTRATE

STEEL GALVANIZED*

ALUMINUM* RUSTED STEEL

CONCRETE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 10.22 m² (110 ft²) per 3.78 L

*Must be primed

¹ Certified by The Coatings Research Institute, Belgium, for corrosivity class C5-M High per ISO Standard 12944
² Restrictions apply. Contact your Rust-Oleum representative for further information.



EPOXY



FOR USE ON:

- Steel beams, structural steel and towers
- Concrete floors and conveyors
- Industrial equipment and storage tanks
- Sewage treatment basins
- Non-potable water storage facilities
- Steel handrails

ROCEPOXY DIRECT TO METAL EPOXY MASTIC 9100

This versatile epoxy coating quickly creates a tough, durable, protective surface. Just one coat of Rust-Oleum High Performance 9100 System DTM Epoxy Mastic is equal to multiple coats of competitive epoxy. Multiple activator options for unique applications.

- **Direct-to-metal (DTM) self priming formula— adheres to a variety of substrates**
- Superior long-term resistance to solvents, chemicals, abrasion and impact
- Convenient 1:1 mixing ratio — no measuring required
- Two-year rust-proof guarantee — maximum corrosion protection

STANDARD ACTIVATOR

- For air and surface temperatures of 10-38°C (50-100°F)

IMMERSION ACTIVATOR

- For fresh or salt water immersion of steel or concrete where water temperatures do not exceed 52°C (125°F)
- Great for use in floor coating applications
- Produces slightly lower gloss than standard activator
- Not for use in potable water tanks

LOW TEMPERATURE ACTIVATOR

- For air and surface temperatures of 5-15°C (40-60°F)

FAST-CURE ACTIVATOR

- Faster cure to minimize downtime
- Recoat in 4 hours at 21°C (70°F) and 50% RH
- For air and surface temperature of 10-38°C (50-100°F)
- Produces slightly lower gloss than standard activator

This is a two-component system. Order base and activator separately.

APPLICATION

SUBSTRATE

STEEL RUSTED STEEL

CONCRETE MASONRY

GALVANIZED

VOC g/l

VOC <340

9100

Covers: 11.62-20.9 m² (125-225 ft²) per 3.78 L



COLOURS (3.79 L)

9171402 Dunes Tan
9122402 Marlin Blue
9186402 Navy Grey
9182402 Silver Grey
9115402 Aluminum
9179402 Black
9192402 White

SAFETY COLOURS (3.79 L)

9125402 Safety Blue
9133402 Safety Green
9144402 Safety Yellow
204006 Safety Red
204005 Safety Orange

TINT BASES (2.84 L)

<input type="checkbox"/> 9105405 Red
<input type="checkbox"/> 9106405 Yellow
<input type="checkbox"/> 9107405 Masstone
<input type="checkbox"/> 9108421 Deep
<input type="checkbox"/> 9109408 Light

ACTIVATORS (3.79 L)

9103402 Low Temp. (<340 g/l)
9101402 Standard (<340 g/l)
9102402[†] Immersion (<340 g/l)
9104402[†] Fast Cure (<340 g/l)
205015 Standard (<250 g/l)
214430 Immersion (<250 g/l)
214432 Fast Cure (<250 g/l)
9103402 Low Temp. (<250 g/l)

[†] Not for use with Tint Bases

COLOURS (18.9 L)

9171300 Dunes Tan
9186300 Navy Grey
9182300 Silver Grey

SAFETY COLOURS (18.9 L)

297081 Safety Orange

TINT BASES (18.9 L)

<input type="checkbox"/> 9107375 Masstone
<input type="checkbox"/> 9108381 Deep
<input type="checkbox"/> 9109388 Light

ACTIVATORS (18.9 L)

9102300[†] Immersion (<340 g/l)
A910008300[†] Fast Cure (<340 g/l)
9101300[†] Standard (<340 g/l)

[†] Not for use with Tint Bases

EPOXY



FOR USE ON:

- Offshore rigs
- Potable water tanks
- Dams
- Boats

ROCEPOXY DIRECT TO METAL LOW TEMPERATURE CURE EPOXY 9200

Rust-Oleum 9200 System is a very versatile, low VOC and low HAPS, two component phenalkamine epoxy. It has excellent wetting characteristics, may be applied at low temperatures, is suitable for a variety of substrates and can tolerate damp surfaces. It dries fast and is compatible with many Rust-Oleum topcoats. The 9200 System is also suitable for water immersion service and is certified for use in potable water storage tanks that are in excess of 3,000 gallon capacity.

- **Low temperature cure for non-immersion service**
- Self priming DTM high build epoxy
- Excellent corrosion protection
- Excellent surface wetting
- Good early moisture resistance
- Extended recoat window for atmospheric exposures
- Can be applied down to -7°C (19°F)


COLOURS (15.14 L)

- 316834 Grey
- 316835 White
- 318207 Blue
- 320261 Safety Yellow*

ACTIVATORS

- 316836 Activator

*NOTE: Safety Yellow is not approved for potable water use

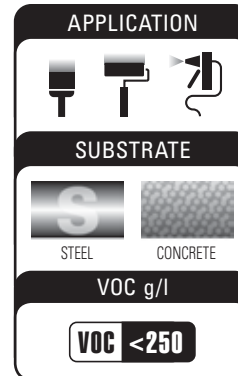

Covers: 13-20.9 m²
(140-225 ft²) per 3.7 L



FOR USE ON:

- Heavy-duty tanks
- Barges, sump and pipelines
- Oil drilling
- Tiers and pilings


ROCEPOXY COAL TAR EPOXY C9578

Achieve maximum surface protection in severe industrial/marine environments with Rust-Oleum High Performance C9578 System Coal Tar Epoxy. This high-solids, polyamide-converted epoxy includes refined coal tar pitch and forms an extremely durable coating.

- **Protects against severe abrasion, strong chemicals and immersion in water (non-potable)**
- Ideal for use on steel, concrete and other surfaces in extremely corrosive environments
- Self-priming, high-build coating (16-24 mils in a single coat); meets stringent specifications*
- Two-year rust-proof guarantee — maximum corrosion protection
- *Meets Corps of Engineers Specs C-200, C-200A, Steel Tank Institute Corrosion Control System STI-P3, AWWA Spec C210-84, and SSPC-Paint 16

This is a two-component system. Order base and activator separately.

- C9578402 Coal Tar Epoxy (3.02 L)
- C9502504 Coal Tar Epoxy Activator (946 mL)
- C9578380 Coal Tar Epoxy Base (15.1 L)
- C9502402 Coal Tar Epoxy Activator (3.78 L)

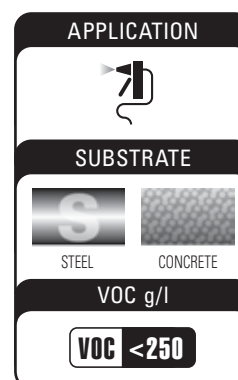

Covers: 9.3-12.08 m²
(100-130 ft²) per 3.78 L



URETHANE



FOR USE ON:

- Tanks & towers
- Equipment & metal buildings
- Structural steel & rusted surfaces

ROCTHANE DIRECT TO METAL URETHANE MASTIC 9800

For ultimate protection and long-lasting appearance, choose Rust-Oleum's High Performance 9800 System DTM Urethane Mastic. This direct-to-metal (DTM) formula fights rust while delivering durable colour retention in aggressive environments.

- **Ideal for tanks, towers, metal equipment, etc. in moderate to severe industrial settings**
- Self-priming — covers in just one coat; two components — order base and activator separately
- High-solids, high-build, sag resistant; extremely durable
- Two-year rust-proof guarantee — maximum corrosion resistance
- Prime first with the H9300 System Epoxy Primer in red or grey
- When using the Urethane Accelerator use spray application only

This is a two-component system. Order base and activator separately.

COLOURS (3.16 L)

- 9871419 Dunes Tan
- 9886419 Navy Grey
- 9882419 Silver Grey
- 9815419 Alumi-NON®
- 9879419 Black
- 9892419 White
- 321696 Flat Black

SAFETY COLOURS (3.16 L)

- 9825419 Safety Blue
- 9844419 Safety Yellow
- 204004 Safety Red

COLOURS (SATIN)(3.16 L)

- 332051 Black
- 332052 White

TINT BASES (GLOSS)(3.14 L)

- 9805470 Red
- 9806470 Yellow
- 9807470 Masstone
- 9808405 Deep
- 9809415 Light

TINT BASES (SATIN)(2.7 L)

- 332057 Masstone
- 332058 Deep
- 332059 Light

COLOURS (18.9 L)

- 252726 ANSI 70 Light Grey
- 252716 Silver Grey
- 9892383 White

TINT BASES (18.9 L)


- 9807370 Masstone
- 9808375 Deep
- 9809377 Light

ACTIVATORS

- 9801501 Activator (946 mL)
- 9801419 Activator (18.9 mL)

COMPANION PRODUCTS

- 202548 Urethane Accelerator

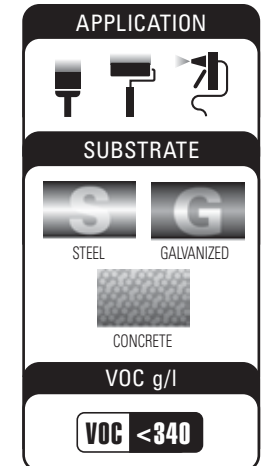

Covers: 14.86-26.01 m²
(160-280 ft²) per 3.7 L



SPECIALTY



FOR USE ON:

- Damaged galvanized steel
- Production welds
- Fences & bridges
- Tanks & utility towers and more
- Vehicles & trailers

V2100 SYSTEM GALVANIZING COMPOUND

Touch up galvanized surfaces with Rust-Oleum High Performance V2100 System Galvanizing Compound Spray. This 93% pure zinc coating provides maximum corrosion resistance and excellent adhesion and durability on galvanized metal.


- Use to touch-up/repair galvanized ducts, storage tanks, etc. in moderate to severe environments
- Dries fast — 20 minutes to the touch; withstands heat to 93°C (200°F)
- Performance offset to Federal Specifications DOD-P-21035A; MIL-P-26915C
- For large projects, apply using the High Performance Comfort Grip
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

COLOURS (567 g)


- V2185838 Cold Galvanizing Compound
- V2117838 Bright Galvanizing Compound

COMPANION PRODUCTS

- 243546 Spray Grip
- 241526 Comfort Grip

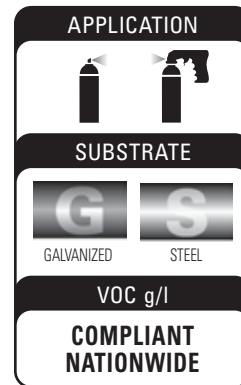

SPECIALTY

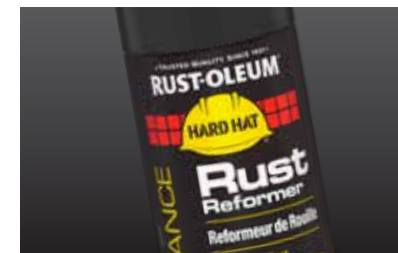

FOR USE ON:

- Hard to reach areas and minimal surface prep projects
- Complex shapes
- Equipment
- Railings

V2100 SYSTEM RUST REFORMER

Stop the development of rust with the V2100 High Performance System Rust Reformer. This coating adheres to rusted metal and instantly turns it into a non-rusty surface. No need to sand down to bare metal; just spray directly on the rust.


- Professional-resistant coating superior to chipping, cracking and peeling
- Becomes hard and dull black when drying; the application of a topcoat is optional
- Heat resistant up to 93°C (200°F)
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

COLOURS (425 g)

- 215634 Rust Reformer

COMPANION PRODUCTS

- 243546 Spray Grip
- 241526 Comfort Grip

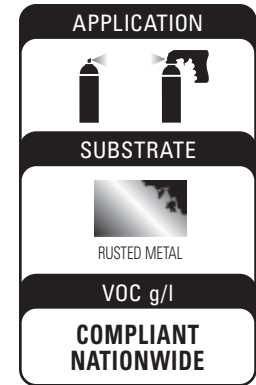

FOR USE ON:

- Bare sheet metal and production welds
- Galvanized ducts and storage tanks
- Fences, gutters, trucks and trailers
- Offshore drilling rigs and utility towers

ROCALKYD COLD GALVANIZING COMPOUND 7000

Instantly galvanize metal surfaces or repair worn or damaged galvanized steel with Rust-Oleum High Performance 7000 System Cold Galvanizing Compound. The coating contains 95% pure zinc in the dry film — for maximum corrosion resistance.


- Two-year rust-proof guarantee — maximum corrosion protection
- Protects and repairs bare sheet metal, galvanized ducts, storage tanks, etc.
- Self-priming; excellent adhesion to galvanized metal
- Ideal for use in mild industrial environments

COLOURS (3.7 L)

- 206193 Cold Galvanizing Compound

COLOURS (946 mL)

- 206194T Cold Galvanizing Compound

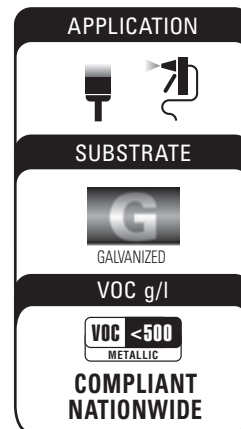

Covers: 28.8-40.88 m²
(310-440 ft²) per 3.7 L



FOR USE ON:

- Boilers & steam pipes
- Vents & exhaust pipes
- Kilns

V2100 SYSTEM HIGH HEAT SPRAY

Add an attractive, heat-resistant finish with the high-temperature spray coating of the Rust-Oleum V2100 High Performance System. This direct-to-metal formula provides the best possible protection against corrosion and heat and provides a long-lasting, durable finish.


- Withstands temperatures up to 537°C (1000°F)
- Professional-resistant finish superior to chipping, cracking and peeling
- High flow nozzle for 50% faster application; dry enamel 20% faster than other brands
- Accepted for use in federally registered Canadian food facilities; VOC-compliant nationwide

COLOURS (426 g)

- V2116838 High Heat Aluminum
- V2176838 High Heat Black

COMPANION PRODUCTS

- 243546 Spray Grip
- 241526 Comfort Grip

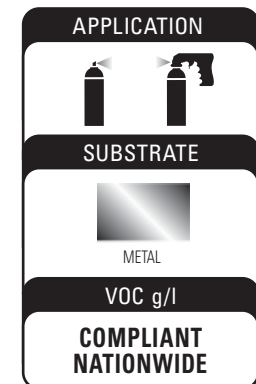

SPECIALTY



FOR USE ON:

- **High Heat Coatings:** Pipes, kilns, furnaces, boilers, incinerators, smoke stacks and more

ROCALKYD HIGH HEAT COATINGS

Rust-Oleum offers three levels of nationally VOC-compliant High Heat Coatings. These performance levels are based on surface exposure. General Purpose High Heat Coatings are designed for surfaces exposed to temperatures up to 205°C (400°F). Heavy Duty High Heat Coatings are designed for surfaces exposed to temperatures up to 427°C (800°F).

- **High Performance High Heat Coatings offer the highest level of performance for surfaces exposed to temperatures up to 650°F (1200°F). Each level of protection is offered in black or aluminum**

- Easy application via spray, brush and roll

COLOURS (FLAT) (3.78 L)

General Purpose (205°C [400°F])

- 286501 Aluminum
- 286503 Black

Heavy Duty (427°C [800°F])

- 286507 Aluminum
- 286509 Black

High Performance (650°C [1200°F])

- 286510 Aluminum
- 286512 Black

APPLICATION

SUBSTRATE

STEEL CERAMIC

VOC g/l

VOC <420

COMPLIANT NATIONWIDE



THINNERS

Rust-Oleum thinners are, most often, blends of two or three different solvents tailor-made for each system. The information listed for thinning and clean up on our technical data sheets are calculated using these thinners and it is highly recommended that these thinners are used to ensure the coatings apply correctly.

160 EPOXY THINNER

Designed for use with the 9100 System epoxies, this thinner can be used for any epoxy or alkyd coating. Perfect for grease and oil removal, adhesive removal, and cleaning of brushes, rollers or spray equipment.

- 160402 (3.78 L)
- 160300 (18.9 L)



190 URETHANE THINNER

Specially formulated for use with urethane coatings, this thinner will remove grease, oil and adhesives. Can also be used with epoxy coatings.

- 190402 (3.78 L)



633 MINERAL SPIRITS THINNER

Best for use on alkyd and latex coatings for cleaning equipment. Brush application.

- 633402 (3.78 L)



641 NAPHTHA THINNER

Best for use on alkyd and latex coatings for cleaning equipment. Spray application.

- 641402 (3.78 L)
- 641300 (18.9 L)



165 WATER IMMERSION THINNER (3.78 L)

Water immersion thinner.

- 165402 (3.78 L)



COMPLIANT THINNER

Thin any product without raising the VOC.

- 315512 (3.78 L)





INDUSTRIAL COATINGS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				COVERAGE				DRY TIME HRS. AT 21°C (70°F)- 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED				CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F) -27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (C/F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (C/F)	APPLICATION TEMPERATURE RANGE
	WET		DRY		PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY								
	MILS	MICRONS	MILS	MICRONS	ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l															
	PERCENT VOLUME SOLIDS				ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l	TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY								
ROCALKYD Direct to Metal Alkyd Enamel V7400	20-35	50-805	1-2	25-50	58-61	400-830	9.8-20.4	930-975	22.9-24	3-5	8-12	24	—	—	333402 5-10%	333402 10%	333402	—	—	100°C 212°F	<340	40°C 104°F	0-38°C 32-100°F
Universal Acrylic Primer	3-6	75-150	1-2	25-50	34	350-450	8.6-11.1	545	13.4	35 min.	1	1	—	—	—	Soap/ Water	—	—	100°C 212°F	<100	82°C 180°F	10-32°C 50-90°F	
ROCEPOXY Direct to Metal Epoxy Mastic 9100	6.5-10.5	162.5-262.5	5-8	125-200	78-81	125-225	3.1-5.5	1250-1300	30.8-32.0	6-8	6-12	16-72	—	—	160402 10%	160402	1:1	70°F	2-41	149°C 300°F	<340	43°C 110°F	10-38°C 50-100°F
ROCEPOXY Coal Tar Epoxy C9578	10.5-13.5	262.5-337.5	8-10	200-250	75-77	100-130	2.5-3.2	1203-1235	29.6-30.4	3-4	18-36	16-25	—	—	160402 0-16%	160402 0-16%	160402 MEK	4:1	2 80°F	60°C 140°F	<250	48°C 86°F	10-30°C 50-100°F
ROCTHANE Direct to Metal Urethane Mastic 9800	5-8	125-200	3-5	75-125	58-62	160-280	3.9-6.9	930-990	22.9-24.4	4-6	6-9	16-24	—	—	—	190402	5:1	2-3 70°F	149°C 300°F	<340	36°C 95°F	40-100°F 5-38°C	
Beyond™ Acrylic Enamel	3-8	75-200	1-3	25-75	36-38	165-520	4.1-12.8	580-610	14.3-15	30	—	2-4	—	Water	Water	Water	Soap/ Water	—	—	—	0	>93°C 200°F	10-38°C 50-100°F
S60 System – Water-Based Epoxy Maintenance Coating	4-6	100-150	2-3	50-75	50	230-340	5.7-8.4	800	19.7	30 min.	1-3	—	—	Water	Water	Water	Soap/ Water	2:1	2	—	0	>93°C 200°F	10-38°C 50-100°F

INDUSTRIAL COATINGS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				COVERAGE				DRY TIME HRS. AT 21°C (70°F)- 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED				CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F) -27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (C/F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (C/F)	APPLICATION TEMPERATURE RANGE		
	WET		DRY		PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY										
	MILS	MICRONS	MILS	MICRONS	ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l																	
	PERCENT VOLUME SOLIDS				ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l	TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY										
S70 System – Brush Industrial Epoxy Primer w/208112 Activator	5-7	125-175	2-3	50-75	43	200-300	4.9-7.4	690	17	30 min	1-2	—	—	Water	—	—	Soap/ Water	1:1	2	—	0	>100°C 212°F	10-38°C 50-100°F		
MetalMax™ DTM Acrylic Enamel	2.5-7.5	62.5-187.5	1-3	25-75	35-39	180-545	4.4-13.4	640	15.8	30 min	2-4	—	—	Water	Water	Water	Soap/ Water	—	—	—	0	>93°C 200°F	10-38°C 50-100°F		
NOXYDE® Elastomeric Acrylic Coating	12	300	7	175	55	110	2.7	880	21.6	2	2-4	4	—	—	—	—	Soap/ Water	—	—	80°C 176°F	<100	>93°C 200°F	8-55°C 46-130°F		
ROCALKYD Cold Galvanizing Compound 7000	3.5-4.5	87.5-112.5	2.5-3.5	62.5-87.5	54.1	310-440	7.6-10.8	1280	21.3	½-1	1-2	12	—	—	633402 5-10%	633402 10-15%	633402 or 641402	—	—	100°C 212°F	<500	35°C 95°F	0-38°C 32-100°F		
ROCACRYLIC Direct to Metal Acrylic Enamel 3800	5-8	125-200	2-3	50-75	—	150-270	3.7-6.6	522-635	12.8-15.6	15 min 45 min	2	—	—	—	—	—	—	—	—	—	—	93°C 200°F	<250	—	—
ROCALKYD High Heat Coating	2.5-5.5	62.5-112.5	1-2	25-50	—	250-540	6.2-13.3	590-634	14.5-15.6	—	1-2	8-24	—	—	—	—	—	—	—	—	—	204°C 400°F	<420	—	—
ROCEPOXY Direct to Metal Low Temperature Cure Epoxy 9200	6-9.5	150-238	4-6	100-150	—	140-225	3.4-5.5	1010-1075	24.8-26.4	30 min	3	45 min.	—	—	—	—	—	—	—	—	—	82°C 180°F	<250	—	—
Universal Alkyd Primer	6-8	150-200	3.5-4.5	87.5-112.5	—	200-250	4.9-6.2	920	22.6	35 min	—	2	—	—	—	—	—	—	—	—	—	—	<336	—	—

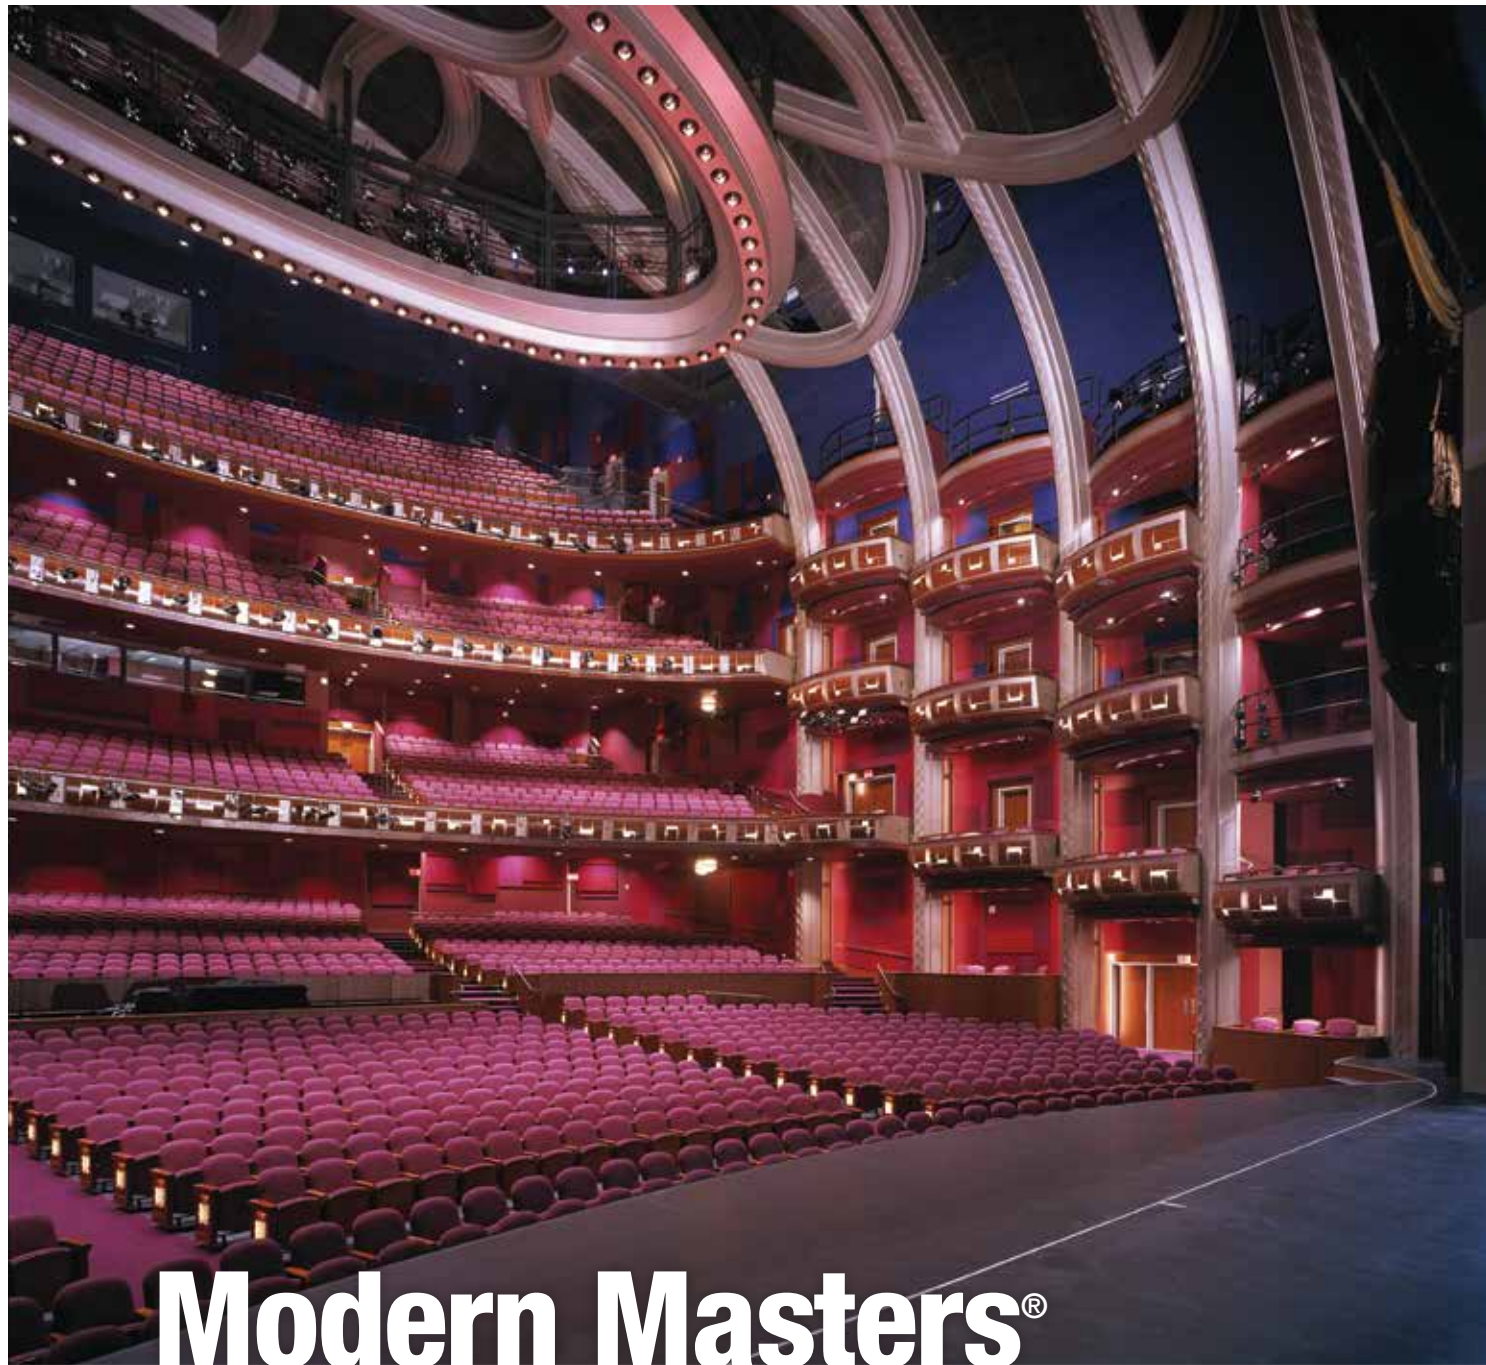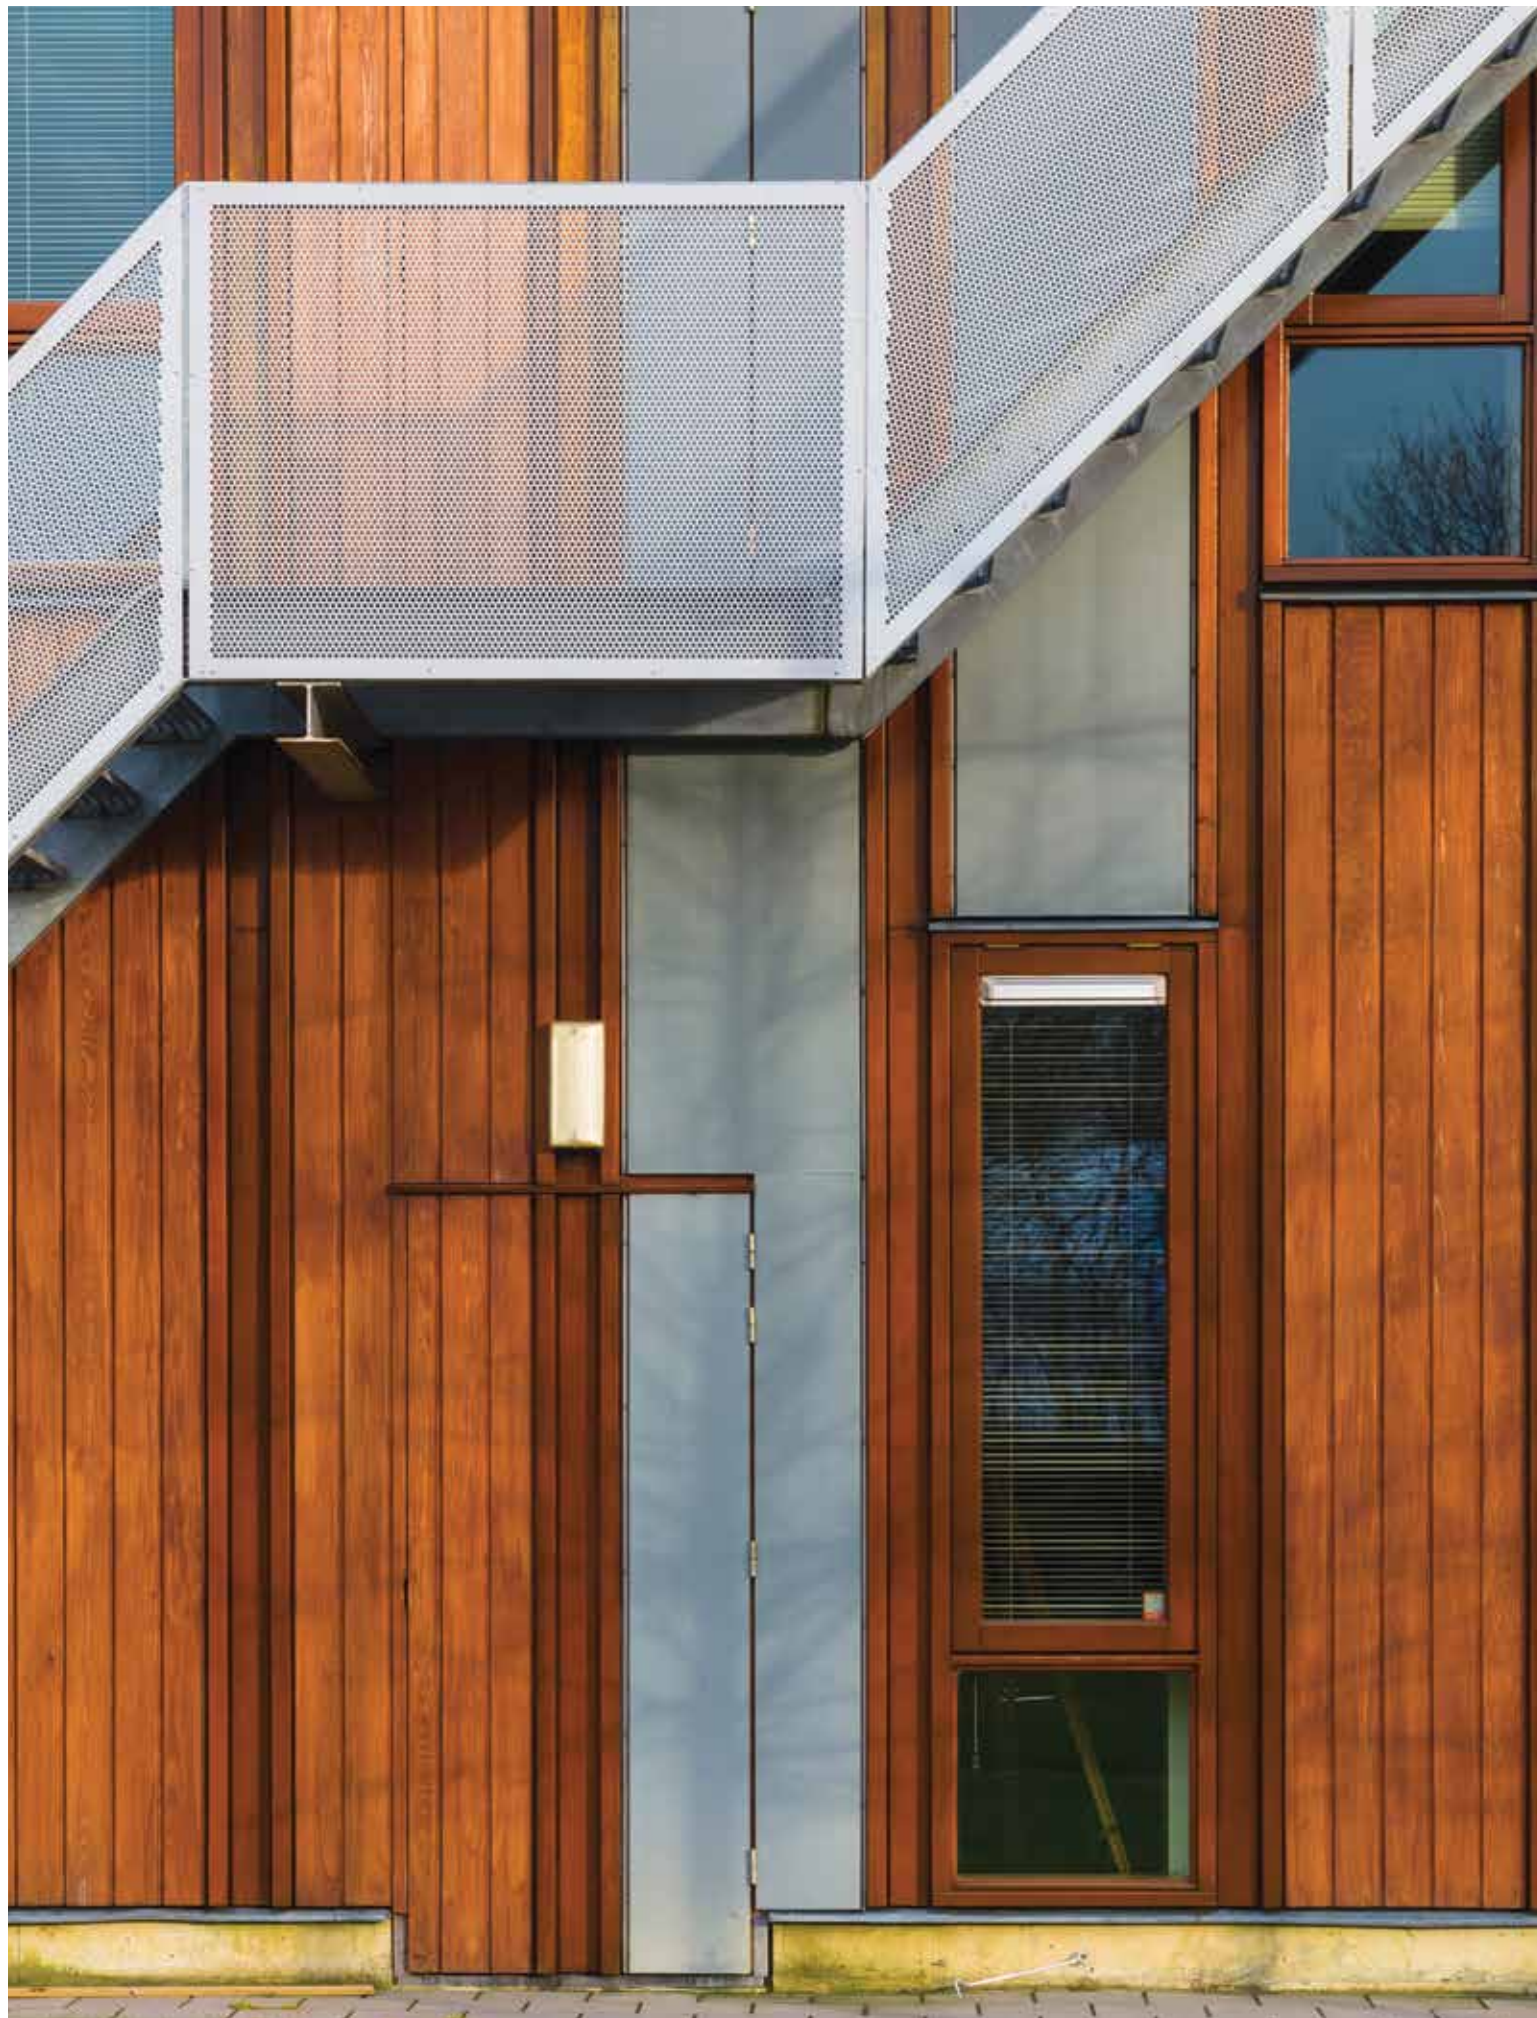

Modern Masters®


Modern Masters® is the world's number one supplier of high-end specialty water-based paint products. The products are available in more than 4,000 retail stores across the United States, Canada, Portugal, Spain, Germany, Sweden, France and other countries.

Product lines include the Metallic Paint Collection — non-tarnishing metallic paints, Metal Effects — an oxidizing decorative finish system, Architectural Textures, Theme Paints, Blacklight Paints, Glazes, Varnishes and Crackles, created for architects, designers, contractors, and decorative painters.

These products are perfect for Architects, Designers, DIY, Contractors and Decorative Painters.



Scan the QR code to view the other products available by Modern Masters

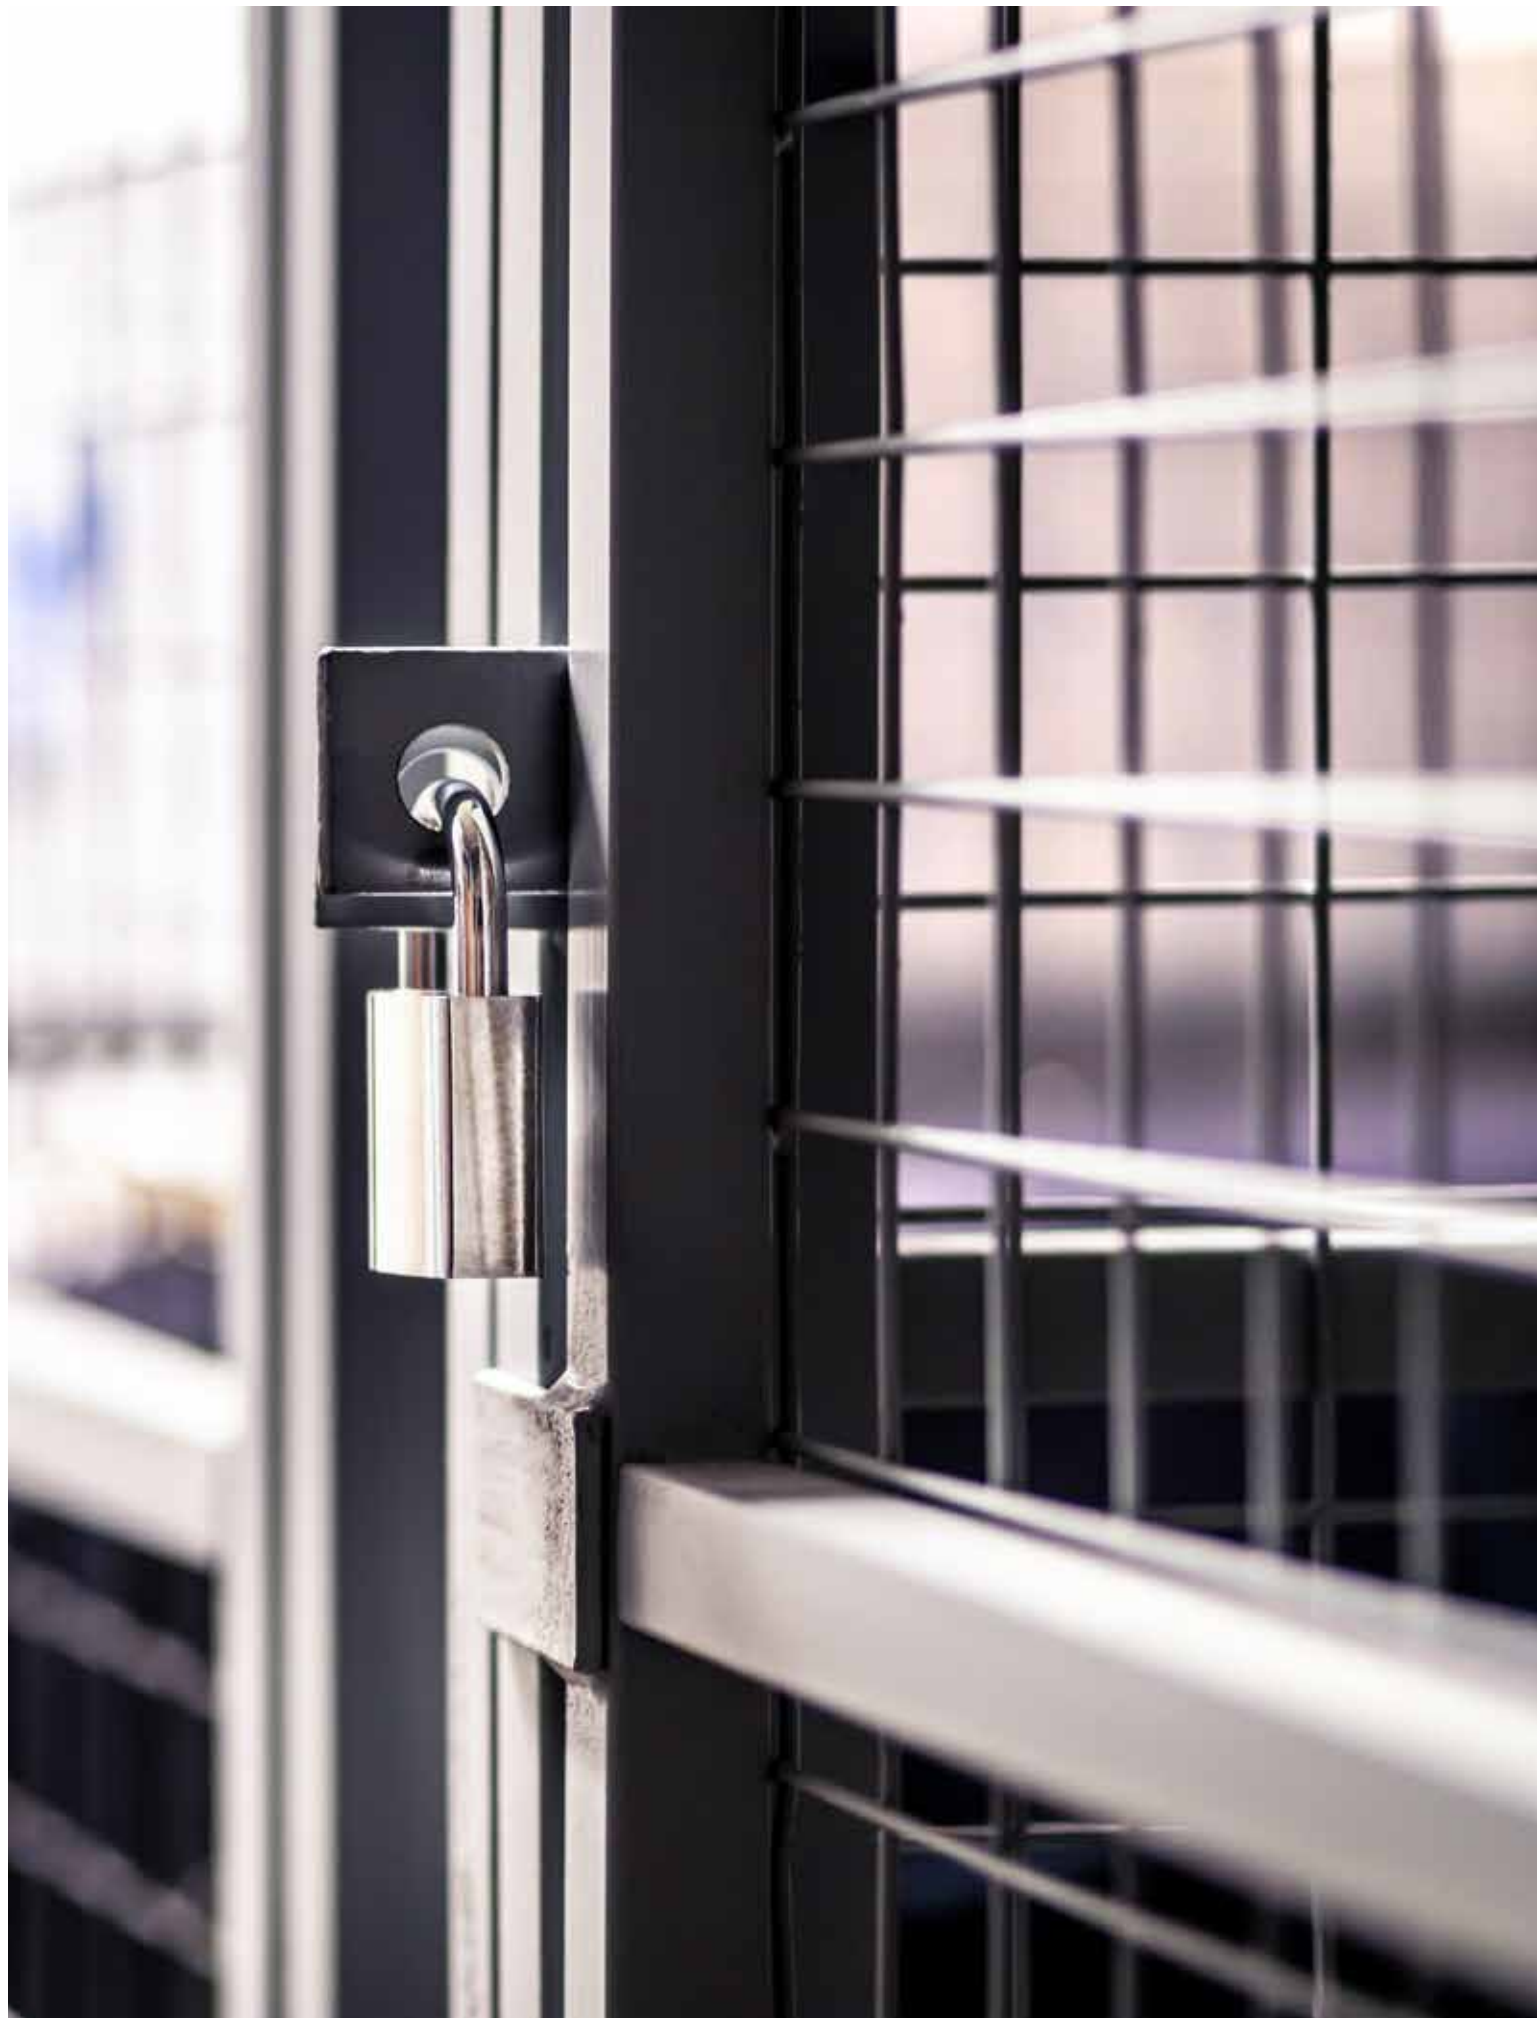

Commercial

Keep your company's assets looking great with Rust-Oleum® Commercial coatings — for a professional, high-gloss finish that resists rust and makes a lasting impression.



ALKYD



- FOR USE ON:**
- Tools and motors
 - Furniture
 - Equipment and colour coding
 - Ladders
 - Lockers

1600 SYSTEM MULTI-PURPOSE ENAMEL

Get fast, high-quality colour with Rust-Oleum 1600 Industrial Choice® System Spray Enamel. This all-purpose paint provides up to twice the performance of competing brands. Can finish a larger area in less time with fewer aerosol cans. Dry to the touch in 12 minutes.

- For indoor and outdoor industrial maintenance
- Resists peeling and fading; heat resistant up to 93°C (200°F)
- The extra-large convenient nozzle eliminates finger fatigue and allows you to spray in any angle, even upside down



APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE

COLOURS (340 g)

- 1672830 Almond
- 1671830 Beige
- 1674830 Leather Brown
- 257399 Purple
- 1626830V True Blue
- 1622830V Regal Blue
- 1638830 Hunter Green
- 202211 Machine Green
- 257401V Emerald Green
- 1643830 School Bus Yellow
- 202216 Dusty Pink
- 1666830 Banner Red
- 1664830V Cherry Red
- 1686830V Universal Grey
- 1684830 Dove Grey
- 1688830 Smoke Grey
- 202214 Machinery Grey

COLOURS (340 g)

- 1614830 Dull Aluminum
- 1676830V Ultra-Flat Black
- 1678830 Semi-Flat Black
- 1679830V Gloss Black
- 1692830V Gloss White
- 1690830V Flat White
- 257402V Semi-Gloss White
- 1696830 Antique White
- 1610830 Crystal Clear

SAFETY COLOURS (340 g)

- 1624830 Safety Blue
- 1633830 Safety Green
- 1653830V Safety Orange
- 1670830 Safety Purple
- 1660830 Safety Red
- 1644830 Safety Yellow

FLUORESCENTS (340 g)

- 1632830 Fluorescent Green
- 1654830 Fluorescent Orange
- 1655830 Fluorescent Red-Orange
- 1659830 Fluorescent Pink
- 1642830 Fluorescent Yellow

ANSI COLOURS (340 g)

- 214645 ANSI 61 Light Grey
- 214646 ANSI 49 Med. Lt. Grey
- 214647 ANSI 70 Light Grey

PRIMERS (340 g)

- 1667830 Red Primer
- 1680830V Grey Primer
- 1681830V White Primer
- 257400 Black Primer

COMPANION PRODUCTS

- 243546 Spray Grip
- 241526 Comfort Grip

ALKYD



- FOR USE ON:**
- Metal
 - Drywall
 - Wood
 - Vinyl

UNIVERSAL ALKYD PRIMER

Rust-Oleum's Commercial Universal Alkyd Primer is a high solids, low VOC oil-based primer designed for interior and exterior surfaces when optimal surface preparation is not possible. Our Universal Alkyd Primer is suitable for nearly all surfaces and provides excellent penetration, flexibility and stain blocking properties. It has excellent adhesion to dense, glossy surfaces such as enamel paints & varnishes, panelling, laminates and ceramic tile without the need for sanding or de-glossing. It can be used as a DTM coating and has a fast drying time.

- Multi-purpose direct-to-metal (DTM) coating; excellent coverage and hide
- Convenient — requires no measuring or mixing; can be brushed, rolled or sprayed
- Resists rust, chipping, general weathering, mild chemical fumes and light abrasion
- For everyday commercial use — metal trim, structural steel, handrails, cabinets, etc.

COLOURS

- 302140 White (3.79 L)
- 302139 White (18.9 L)
- 330143 Red (3.79 L)
- 330145 Red (18.9 L)
- 330142 Grey (3.79 L)
- 330144 Grey (18.9 L)

APPLICATION

SUBSTRATE

VOC g/l

VOC <340

Covers: 27.97-37.16 m²
(300-400 ft²) per 3.79 L



ACRYLIC



FOR USE ON:

- Equipment
- Structural steel and pipes
- Metal cabinets and lockers
- Railings, trim and doors
- Gates & vents

UNIVERSAL ACRYLIC PRIMER

Rust-Oleum's Universal Acrylic Primer is specifically formulated for application to a variety of surfaces that include metal, wood, concrete, plaster, wallboard, hardboard, glass, and tile. The rust inhibitive formulation also makes it an ideal choice for direct application to steel. The primer is also an excellent stain blocker and resists growth of mould and mildew.

- Excellent hide and adhesion
- For interior and exterior applications
- Mould and mildew resistant; rust preventive
- Tintable formula; LEED compliant

COLOURS

- 278808 White (3.79 L)
- 278807 White (18.9 L)
- 292606 Grey (3.79 L)
- 292603 Grey (18.9 L)

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 32.5-41.8 m² (350-450 ft²) per 3.79L



MODIFIED URETHANE LATEX EPOXY



FOR USE ON:

- Concrete
- Drywall
- Masonry
- Metal
- Painted Surfaces
- Wood

THE MULE (MODIFIED URETHANE LATEX EPOXY)

The MULE is an easy to use, versatile, abrasion resistant coating designed for high traffic areas that are subject to routine cleaning and disinfecting. This Modified Urethane Latex Epoxy (The MULE) can be applied inside or outside on walls, doors, trim, railings and even floors.

- Versatile, abrasion resistant coating for walls, doors, trim and floors
- Highly washable, ultra smooth finish
- Great adhesion on multiple surfaces
- Low odour, water-based formula
- Interior or exterior use
- VOC compliant nationwide

COLOURS (GLOSS) (3.78 L)

- 375645 Black
- 381208 Dunes Tan
- 375661 Safety Yellow
- 375642 Silver Grey
- 375658 White

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 14-30 m² (155-330 ft²) per 3.79L



SPECIALTY


FOR USE ON:

- Rebar

RB1600 SYSTEM GREEN REBAR EPOXY

Easily touch up rebar coatings on the job site with Rust-Oleum Industrial Choice® RB1600 System Green Rebar Epoxy Spray. This one-step, direct-to-metal coating provides long-lasting resistance to corrosion and chemicals.


- Fast and easy to apply; minimal surface prep required
- Dries to the touch in 15 minutes
- Prevents rust and metal stains in concrete

COLOURS (340 g)

- 261937 Green Rebar

COMPANION PRODUCTS

- 243546 Spray Grip
- 241526 Comfort Grip

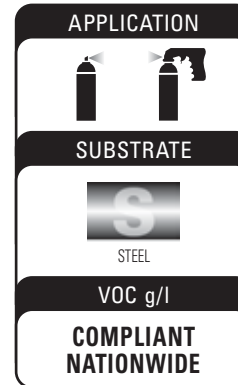

SPECIALTY


FOR USE ON:

- Gutters
- Roofs
- Flashing
- Ductwork
- PVC drains
- Masonry
- Concrete and more


LEAKSEAL™ FLEXIBLE RUBBER SEALANT

LeakSeal is an easy-to-use flexible rubber sealant that dries to a semi-smooth, firm finish that will not sag or drip, and can be top-coated with latex or oil-based paints.

- Fills and seals cracks instantly
- Creates a water-tight, paintable surface

COLOURS (405 g)

- 266288 Black
- 266289 Clear
- 269788 Grey
- 269790 White
- 269791 Brown

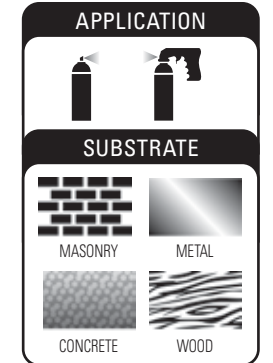
FOR USE ON:

- Damaged galvanized steel
- Production welds
- Fences and bridges
- Tanks, utility towers and more
- Vehicles and trailers
- Touch-up and repair

1600 SYSTEM GALVANIZING COMPOUND

Touch up galvanized surfaces with Rust-Oleum Industrial Choice® 1600 System Galvanizing Compound Spray. This 93% pure zinc coating provides maximum corrosion resistance and excellent adhesion and durability on galvanized metal.


- Dries fast — 20 minutes to the touch; withstands heat up to 93°C (200°F)
- Use to touch-up/repair galvanized ducts, storage tanks, fences, gutters, etc.

COLOURS (396 g)

- 1685830 Cold Galvanizing Compound
- 244305 Bright Galvanizing Compound

COMPANION PRODUCTS

- 243546 Spray Grip
- 241526 Comfort Grip

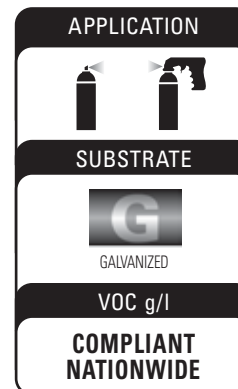
FOR USE ON:

- Gutters
- Roofs
- Flashing
- Ductwork
- PVC drains
- Masonry
- Concrete and more


LEAKSEAL™ FLEXIBLE RUBBER SEALANT


LeakSeal Brush is an easy to use, rubberized protective utility coating designed to fill and seal leaks and cracks. It provides a water-tight, flexible seal that prevents moisture penetration, rust and corrosion.

- High build formula that seals leaks and cracks instantly
- Ideal for filling large problematic and hard-to-reach areas

COLOURS (946 mL)

- 281045 Black
- 281046 Clear

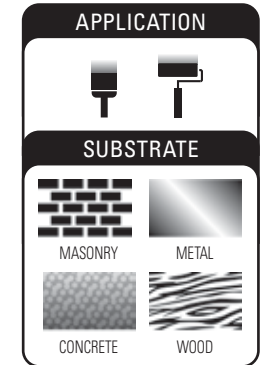

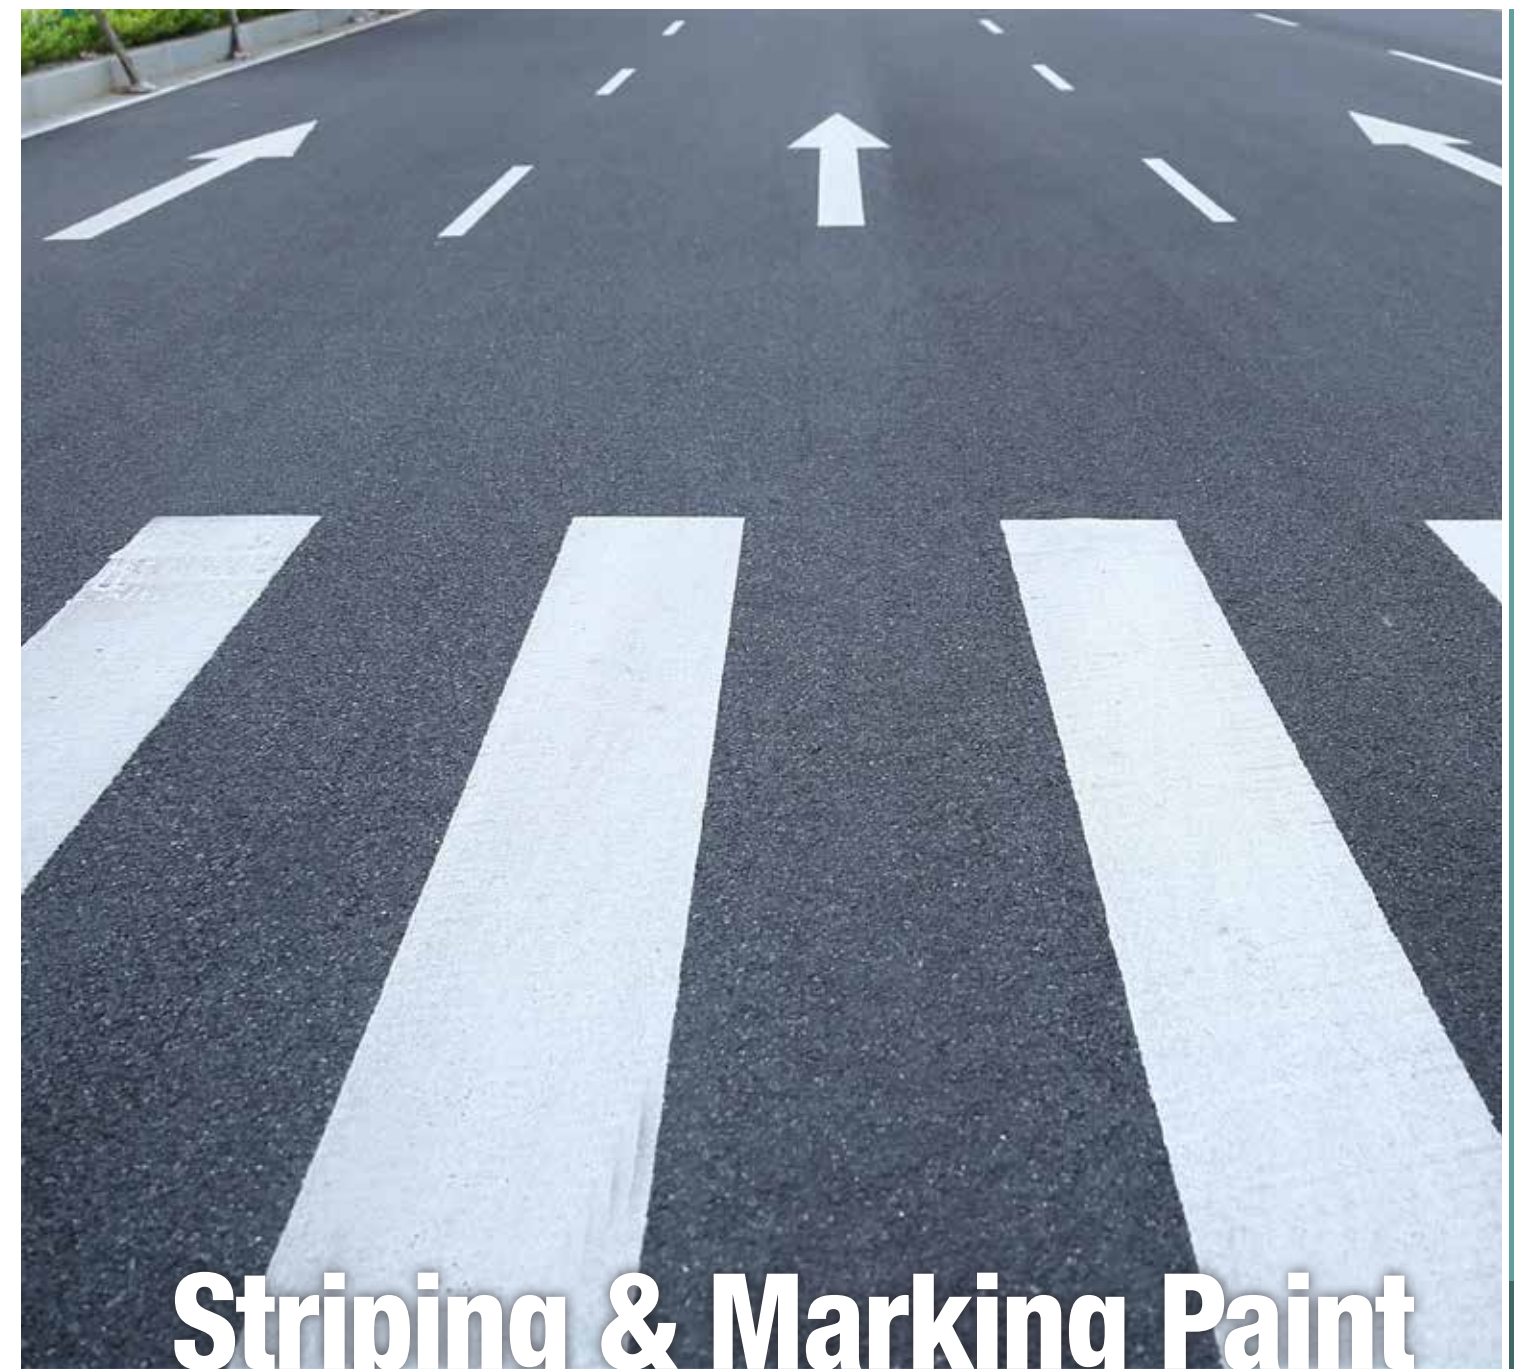

Striping & Marking Paint

Rust-Oleum offers a vast assortment of striping and marking spray paints for any job. From precision markings for utility locating or bold markings for a construction job, our marking paint selection is the most complete in the industry. When it comes to striping parking lots, athletic fields or walkways, our collection of trusted striping paints go the distance with long-lasting results you can count on every time.





FOR USE ON:

- Utility and construction
- Excavation
- Surveying and landscape
- Golf course markings

**M1600/M1800 SYSTEM
PRECISION LINE INVERTED
MARKING PAINT**

Solvent-based (M1600) and Water-based (M1800) marking paints feature a precision-line spray tip for easy-to-read bright, vivid markings for utility, construction, excavation, surveying, landscape and golf course markings.

- **Best resistance against premature fading**
- Precision spray tip
- Marks more linear feet per can than other brands
- No mess spray tip keeps paint off fingers
- Locking tip does not pop off
- Virtually no overspray
- Dries fast — less than 5 minutes
- Convenient spray-through cap
- Guaranteed not to clog

APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE

APWA UNIFORM COLOUR CODE

YELLOW	Gas, oil, steam, petroleum, gaseous materials
RED	Electric power lines, cables, conduit, lighting cables
PURPLE	Reclaimed water, irrigation, slurry lines
BLUE	Potable water
GREEN	Sewers and drain lines
WHITE	Proposed excavation
PINK	Temporary survey markings
ORANGE	Communication, alarm/signal lines, cables, conduit

TOTAL LINEAR FEET COMPARISON



**M1600 SOLVENT-BASED
COLOURS (482 g)**

- 203022V APWA / Caution Blue
- 203024V Caution Yellow
- 203025V High Visibility Yellow
- 203026V Alert Orange
- 201516V APWA Orange
- 1675838V Black
- 203030V White
- 1601838V Clear
- 239007 Silver (454 g)
- 1634838V APWA / Safety Green
- 203029V Safety Red

FLUORESCENTS (482 g)

- 1669838V Fluorescent Purple
- 1662838V Fluorescent Red
- 203028V Fluorescent Red-Orange

FLUORESCENTS (482 g)

- 203023V Fluorescent Green
- 203027V Fluorescent Orange
- 1661838V Fluorescent Pink

**M1800 WATER-BASED
COLOURS (482 g)**

- 203031 APWA / Caution Blue
- 203033 Caution Yellow
- 203034 High Visibility Yellow
- 203035 APWA / Alert Orange
- 1875838 Black
- 203039 White
- 1801838 Clear (454 g)

SAFETY COLOURS (482 g)

- 1834838 APWA / Safety Green
- 1868838 Safety Purple
- 203038 Safety Red

FLUORESCENTS (482 g)

- 205176 Fluorescent Blue
- 1869838 Fluorescent Purple
- 1862838 Fluorescent Red
- 203037 Fluorescent Red-Orange
- 203032 Fluorescent Green
- 203036 Fluorescent Orange
- 1861838 Fluorescent Pink

COMPANION PRODUCTS

- 268476 Marking Wand
- 210188 Marking Pistol



FOR USE ON:

- Utility and construction
- Excavation and surveying
- Landscape and golf course markings

**M1400 SYSTEM
CONSTRUCTION
MARKING PAINT**

The only marking paint needed for any job or landscape applicator.

- **Bold, easy to see markings for excellent visibility**
- Excellent visibility on concrete, dirt, gravel, grass, wood and more
- Best resistance against early fading and chalking
- Non-clogging, inverted spray tip won't pop off
- Water and Solvent-based formula

**WATER-BASED
COLOURS (482 g)**

- 264693 Clear
- 264692 White
- 264694 Caution Blue
- 264695 High Visibility Yellow
- 264696 Safety Red
- 314062 Safety Green
- 316312 Safety Purple

FLUORESCENTS (482 g)

- 264697 Fluorescent Orange
- 264702 Fluorescent Pink
- 264699 Fluorescent Red-Orange
- 264700 Fluorescent Green

COMPANION PRODUCTS

- 268476 Marking Wand
- 210188 Marking Pistol

APPLICATION

SUBSTRATE

VOC g/l

COMPLIANT NATIONWIDE





FOR USE ON:

- Trees
- Logs
- Wood
- Lumber
- Timber

T1600 SYSTEM AEROSOL TREE MARKING PAINT

Rust-Oleum T1600 System Aerosol Tree Marking Paint utilizes a new ground breaking formula which allows for both wet and dry application. This unique formula allows for deep penetration in any condition creating a lasting mark. T1600 is the ideal choice for any type of wood marking.

- **Penetrates into bark or wood grain for superior adhesion**
- Vivid, durable markings stand up to water exposure, even salt water
- Non-clogging formula sprays mess free through both provided tips
- Provides no-fade identification on bark or cut lumber
- No running when sprayed on wet surfaces
- No chalking when sprayed on dry surfaces

COLOURS (482 g)

- 306516 Red
- 306517 Orange
- 306518 Blue
- 306523 Fluorescent Pink
- 306524 Fluorescent Orange

APPLICATION

SUBSTRATE

WOOD

VOC g/l

COMPLIANT NATIONWIDE



FOR USE ON:

- Utility
- Construction and excavation
- Surveying
- Landscape and golf course markings

MC1800 SYSTEM PRECISION LINE INVERTED MARKING CHALK

Marking chalk for temporary markings that last up to 30 days.

- **Can be easily removed with a wire brush and water or pressure washing**
- Precision-line spray tip creates clean, easy-to-read markings
- Virtually no overspray
- Scuff-resistant in 10 minutes
- Convenient spray-through cap
- Locking tip does not pop off
- Guaranteed not to clog

COLOURS (482 g)

- 205236 APWA Blue
- 205238 APWA Green
- 205234 APWA Yellow
- 205233 APWA Orange
- 205235 APWA Red
- 205237 APWA White

COMPANION PRODUCTS

- 268476 Marking Wand
- 210188 Marking Pistol

APPLICATION


SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL

AND MORE!

VOC g/l

COMPLIANT NATIONWIDE

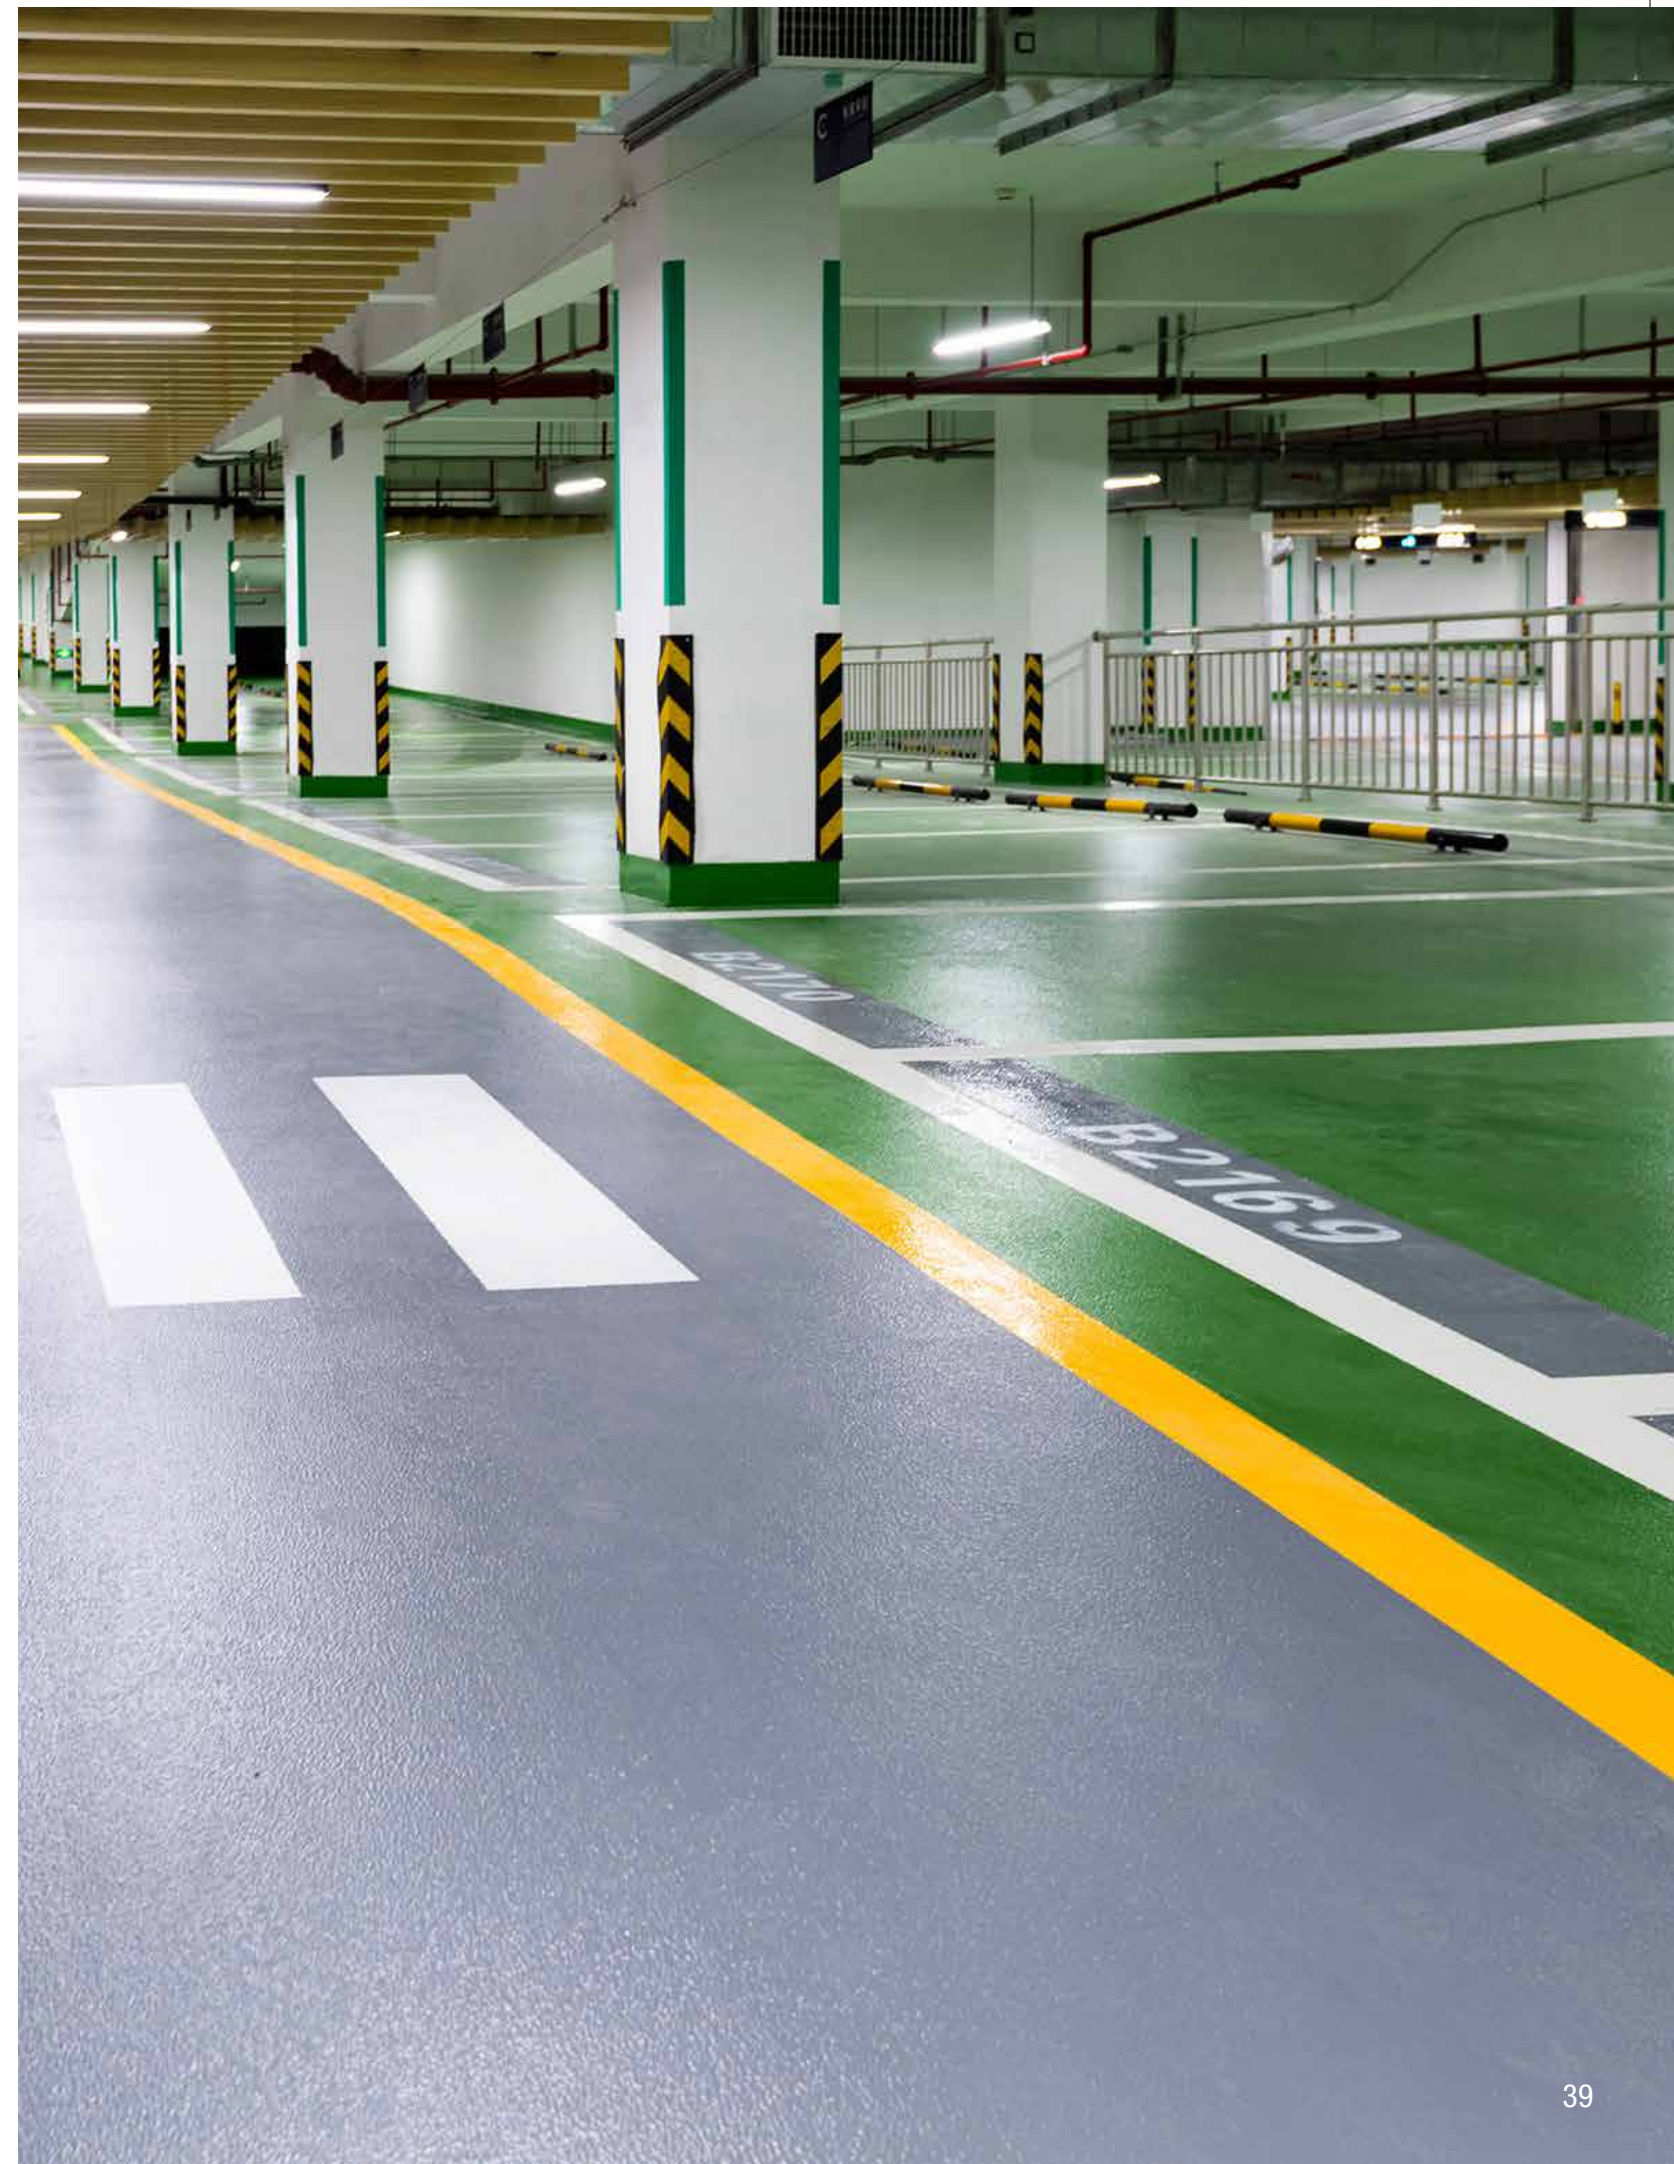



- FOR USE ON:**
- Aisles and lift truck routes
 - Pallet positions and hazardous areas
 - Commercial parking lots and playgrounds
 - Stadiums and athletic facilities

2300 SYSTEM INVERTED STRIPING PAINT

Solvent-based inverted striping paint for durable and bright long-lasting lines.

- **Highest solids for complete coverage**
- Dries fast — less than 10 minutes
- Guaranteed not to clog
- Use with Striping Machine or Striping Wand

COLOURS (510 g)		COMPANION PRODUCTS	
	2326838 Blue	2395000	Striping Machine
	2348838V Yellow	2388000	Striping Wand
	2364838 Red		
	2378838 Black		
	2391838V White		
	362971 Safety Green		
	362972 Orange		

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
DIRT GRAVEL
AND MORE!

VOC g/l

COMPLIANT NATIONWIDE



- FOR USE ON:**
- Athletic fields
 - Playgrounds
 - Golf courses

AF1600 SYSTEM ATHLETIC FIELD INVERTED STRIPING PAINT

Water-based striping paint formula specially designed for use on athletic fields, playgrounds, golf courses and more.

- **Fast-drying formula creates bright, durable lines**
- Will not harm grass
- Guaranteed not to clog

COLOURS (482 g)	
	206045 Yellow
	206043 White
	257403 Fluorescent Green
	257406 Fluorescent Orange
	318192 Scarlet Red
	318193 Royal Blue
	318195 Black

COMPANION PRODUCTS

206346	Athletic Field Striping Machine
2388000	Striping Wand


APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT NATIONWIDE

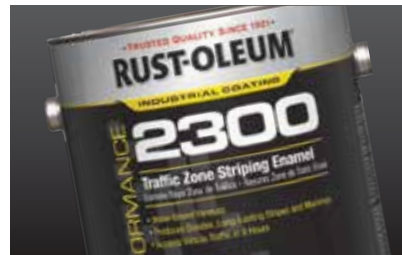

- FOR USE ON:**
- Parking lots
 - Stadiums
 - Curbs
 - Athletic facilities

2300 SYSTEM TRAFFIC ZONE STRIPING PAINT

Water-based acrylic coating for large striping jobs such as parking lots, stadiums and athletic facilities.

- **Dries fast — 30 minutes touch and tack free**
- Creates up to 410 linear feet with a 4" stripe
- MPI #97 certified
- Use with Bulk striping machine

COLOURS (FLAT)		COLOURS (SEMI-GLOSS)	
	2326402 Traffic Blue		283900 Traffic Blue
	2348402 Traffic Yellow		283902 Traffic Yellow
	243276 Traffic Red		283868 Traffic Red
	246774 Traffic Black		283906 Traffic Black
	2391402 Traffic White		283903 Traffic White
	2348300 Traffic Yellow (5 Gal.)		283907 Bike Lane Green
	2391300 Traffic White (5 Gal.)		202475 Traffic Yellow (5 Gal.)

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRAVEL
AND MORE!

VOC g/l

VOC < 100

COMPANION PRODUCTS



- STRIPING MACHINE**
- Create 2-4" straight lines quickly and easily
 - Cover a larger area in a shorter time
 - Convenient storage compartment holds 12 extra cans
 - Sturdy steel construction
 - Collapsible handle for easy storage
- N2395000** Striping Machine



- ATHLETIC FIELD STRIPING MACHINE**
- Create 3-6" straight lines quickly and easily
 - Cover a larger area in a shorter time
 - Convenient storage compartment holds 12 extra cans
 - Sturdy steel construction
 - Collapsible handle for easy storage
 - Large diameter wheels to accommodate high grass conditions
- 206346** Athletic Field Striping Machine



- STRIPING WAND**
- Use for convenient touch-up of lines or stenciling
 - Sturdy, lightweight construction
- 2388000** Striping Wand



- MARKING WAND***
- Easy, upright site marking
 - Quick and convenient with no mess
 - Comfortable grip
 - Convenient flag holder
 - Lightweight, yet durable construction
 - Use with Rust-Oleum Inverted Marking Paint
- 268476** Marking Wand
- *2393000 Standard Marking Wand still available



- MARKING PISTOL**
- Easy, accurate marking
 - Light touch spray control
 - Comfortable grip
- N2393000** Marking Pistol



- FOR USE ON:**
- Parking lots and school grounds
 - Pallet positions and warehouses
 - Truck routes
 - Stadiums and athletic facilities

S1600 SYSTEM INVERTED STRIPING PAINT

Solvent-based inverted striping paint for crisp, long-lasting lines for use in athletic facilities, stadiums, parking lots and more.

- **Dries fast — less than 10 minutes**
- Guaranteed not to clog
- Use with Striping Machine or Striping Wand

COLOURS (454 g)		COMPANION PRODUCTS	
	1627838 Blue	2395000	Striping Machine
	263446 Dark Blue	2388000	Striping Wand
	1648838V Yellow		
	1665838 Red		
	1677838 Black		
	1691838V White		

APPLICATION

SUBSTRATE

CONCRETE PAVEMENT
GRASS GRAVEL
AND MORE!

VOC g/l

COMPLIANT NATIONWIDE



Sierra Performance™

Get all the industrial performance you need — with low VOCs, low hazardous air pollutants, and low odour. Discover environmentally friendly alternatives to traditional, solvent-based coatings.



ACRYLIC



FOR USE ON/IN:

- Doors, Cabinets, Trim, Furniture, Equipment, Schools, Healthcare Facilities, Food Service Areas, Office Buildings, Hotels
- Any area where odours are an issue

**BEYOND™
ACRYLIC ENAMEL**

Achieve a smooth, professional finish — with low VOCs — using Rust-Oleum Sierra Performance™ Beyond™ Acrylic Enamel. This water-based formula contains low VOCs, low HAPs1 and no solvent odour. It is ideal for schools, cafeterias and settings where paint fumes are an issue.

- Superior resistance to chipping, cracking and peeling; excellent colour retention
- Fast, convenient, single-component system — dries in 30 minutes
- Impervious to moisture; easily cleaned and sanitized
- For interior/exterior use on primed or painted metal, concrete, masonry, wood, drywall, tile
- Achieve maximum performance by starting with MetalMax® or Griptec™ primers

COLOURS (SATIN) (3.79 L)

- 208048 Black
- 210479 Clear
- 238749 White

COLOURS (GLOSS) (3.79 L)

- 208058 Black
- 210491 Clear
- 238748 White
- 238750 Navy Grey

SAFETY COLOURS (GLOSS) (3.79 L)

- 210493 Safety Red
- 210495 Safety Yellow

TINT BASES (GLOSS) (3.67 L)

- 208050 White Pastel Base
- 208052 Tint Base
- 208054 Deep Base
- 208056 Accent Base

TINT BASES (SATIN) (3.67 L)

- 208040 White Pastel Base
- 208042 Tint Base
- 208044 Deep Base
- 208046 Accent Base

TINT BASES (GLOSS) (18.9 L)

- 208051 White Pastel Base

TINT BASES (SATIN) (18.9 L)

- 208041 White Pastel Base
- 208043 Tint Base

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 15.3-48.3 m²
(165-520 ft²) per 3.79 L



ACRYLIC



FOR USE ON/IN:

- Metal applications
- Mild to moderate Industrial Environments
- Schools
- Healthcare Facilities
- Any area where odours are an issue

**METALMAX®
DTM ACRYLIC ENAMEL**

Get excellent corrosion protection — plus low VOCs — with Rust-Oleum Sierra Performance™ MetalMax® DTM Acrylic Enamel. This water-based formula contains low VOCs, low HAPs1 and no solvent odour. It is ideal for schools and settings where paint fumes are an issue.

- Superior resistance to corrosion and humidity; excellent colour retention
- Fast, convenient, single-component system — dries in 30 minutes
- Results in a smooth, washable, professional finish
- Applies direct-to-metal (DTM), including galvanized steel and aluminum; for interior/exterior use

COLOURS (SEMI-GLOSS) (3.79 L)

- 208039 Black
- 238752 White
- 238754 Navy Grey

COLOURS (SATIN) (3.79 L)

- 282539 White

SAFETY COLOURS (SEMI-GLOSS) (3.79 L)

- 210477 Safety Yellow
- 210475 Safety Red
- 238753 Safety Blue

COLOURS (GLOSS) (3.79 L)

- 264188 Clear

TINT BASES (SEMI-GLOSS) (3.67 L)

- 208031 White Pastel Base
- 208033 Tint Base
- 208035 Deep Base
- 208037 Accent Base

TINT BASES (SEMI-GLOSS) (18.9 L)

- 208032 White Pastel Base
- 208036 Deep Base
- 208038 Accent Base

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 16.7-50.6 m²
(180-545 ft²) per 3.67 L



EPOXY

**FOR USE ON/IN:**

- Equipment
- Steel Surfaces
- Warehouses
- Schools
- Food Service Areas
- Office Buildings
- Any area where odours are an issue

S70 SYSTEM WATER-BASED EPOXY PRIMER

For added protection with Sierra Performance™ epoxies, start with Rust-Oleum Sierra Performance™ S70 Water-based Epoxy Acrylic Primer. This water-based primer contains low VOCs, HAPs1 or solvent odour and is ideal for settings where fumes are an issue.

- **Increases the performance of Sierra Performance™ epoxies**
- Specially formulated for brush or roller application; dries fast — 30 minutes to touch
- Superior adhesion, outstanding resistance to chemicals and corrosion
- Easy-to-use, two-component system — order base and activator separately
- Primer for Sierra S60 System Water-based Epoxy Maintenance Coating

PRIMERS

BRUSH: 208110 White (1.89 L)

SPRAY: 208113 Grey (1.89 L)

ACTIVATOR

208112 S70 Activator (1.89 L)

APPLICATION

SUBSTRATE

S STEEL **G** GALVANIZED

A ALUMINUM **C** CONCRETE

M MASONRY

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 18.6-27.9 m²
(200-300 ft²) per 1.89 L

**FOR USE ON:**

- Food and beverage plants
- Schools, healthcare and warehouses
- Food service, office buildings and hotels
- Equipment, machinery and steel surfaces
- General maintenance
- Areas subject to frequent washdowns
- Any area where odours are an issue

S60 SYSTEM WATER-BASED EPOXY MAINTENANCE COATING

Get exceptional surface protection — and low VOCs — with Rust-Oleum Sierra Performance™ S60 Water-based Epoxy Maintenance Coating. This water-based kit contains low VOCs, low HAPs1 and no solvent odour. It creates a tough, high-gloss finish.

- **High-performance coating—ideal for surfaces that are subjected to frequent wash-downs**
- Impervious to moisture; easily cleaned and sanitized
- Dries fast — 30 minutes to touch, return to service in 24 hours
- Easy-to-use, two-component kit — includes coloured base and activator
- Achieve maximum performance by starting with an S70 primer
- On steel surfaces use Sierra S70/S71 Water-based Epoxy Primer as the S60 alone is not a direct to metal coating.
- Not suitable for continuous water immersion service

APPLICATION

SUBSTRATE

C CONCRETE **M** MASONRY

VOC g/l

VOC <50

COMPLIANT NATIONWIDE

Covers: 21.4-31.6 m²
(230-340 ft²) per 1.27 L

KITS (GLOSS)

- 248285 Stone Grey
- 248287 OSHA Safety Red
- 248288 OSHA Safety Yellow
- 248291 OSHA Safety Blue
- 248289 Oyster White
- 248290 Black
- 251212 Classic Grey

COLOURS (GLOSS) (1.27 L)

- 208066 Clear
- 208072 Classic Grey
- 248282 Black

COLOURS (SATIN) (1.89 L)

- 208084 Clear

SAFETY COLOURS (GLOSS) (1.25 L)

- 248279 OSHA Safety Red
- 248280 OSHA Safety Yellow
- 248283 OSHA Safety Blue

TINT BASES (GLOSS) (1.25 L)

- 248273 White Pastel Base
- 248274 Tint Base
- 248275 Deep Base
- 248276 Accent Base

TINT BASES (SATIN) (1.66 L)

- 282601 Deep Base
- 282602 Pastel Base
- 282600 Accent Base

ACTIVATORS (2.54 L)

- 248284 Gloss Activator
- 283742 Satin Activator





Gator®

Gator® Finishing Products are designed for both professional and DIY customers. Gator incorporates all standards for sanding and finishing projects that any working enthusiast would expect as well as innovative new approaches to your basic sanding tasks. We produce a wide variety of performance designed, durable, and high-quality abrasives including sandpaper sheets, fiber discs, sanding belts, orbital sheets, hook & loop and stick-on sanding discs, sanding sponges, and our unique line of Zip® sanding products.



ZIP® SANDING TOOLS



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

ZIP® HOOK & LOOP MICRO SANDING KIT

Measuring 1-Inch x 3-1/2-Inch long, this little sanding tool is a perfect fit for those hard-to-sand detail areas. The Micro Zip sanding tool fits snugly under your index finger and allows you to get into tight spots to sand with great performance. This is the perfect sanding tool for furniture restoration, refinishing a rare mahogany wood door jamb, or working on a detailed hobby project.

- Kits contain assorted grits of refill sheets that will take your project from start to finish
- The high-density foam is durable, lightweight, and provides a cushioned sanding surface for exceptional comfort
- Quick-change hook and loop backing

Item No.	Grit	Grade	Pack Qty	Master
7800012	80/120/220	Assorted	1	5



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

ZIP® HOOK & LOOP DETAIL SANDING KIT

The Gator detail sander is made from a rubber polymer base that can withstand almost any abuse you give it. Engineered to provide the best results in the shortest amount of time; it's great for sanding flat surfaces as well as hard-to-reach areas. With the quick-change hook and loop system, paper changes are fast and easy. Put this tool in your toolbox today and find out just how much easier those sanding projects become.

- Kits contain assorted grits of refill sheets that will take your project from start to finish
- The tool is made with a high-density foam which provides a cushioned sanding surface, helping to ease the fatigue that comes with hand sanding
- Quick-change hook and loop backing

Item No.	Grit	Grade	Pack Qty	Master
7330012	50/80/120	Assorted	1	5



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

ZIP® HOOK & LOOP HANDY BLOCK SANDING KIT

This premium finish project kit is designed for sanding multi-surfaces including wood, metal, fiberglass and painted surfaces. These kits contain everything you need to repair or prepare a variety of surfaces before applying your finishes. The ergonomic block provides maximum control and comfort, while the quick-change hook and loop holding systems make changing sheets fast and easy.

- Kits contain assorted grits of refill sheets that will take your project from start to finish
- The tool is made with a high-density foam which provides a cushioned sanding surface, helping to ease the fatigue that comes with hand sanding
- Quick-change hook and loop backing

Item No.	Description	Grit	Grade	Pack Qty	Master
4120012	Project Pack	80/120/220	Assorted	1	5

ZIP® SANDING TOOLS




FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces
 • Drywall, joint compounds, spackling, and paint scuffing
 • Automotive Paints, Varnish, Lacquer, Porcelain, Metal, Primer

ZIP® HOOK & LOOP HANDY BLOCK REFILL SHEETS

Each pack of refill sheets contains a range of grits to take your project from start to finish. For use with the Zip® Handy Block tool. The grain is bonded to a flexible latex paper making the sheets perfect for hand sanding of irregular surfaces.

- The all-purpose sheets are designed for sanding multi-surfaces including wood, metal, fiberglass and painted surfaces
- The drywall sheets are designed for sanding and feathering drywall joint compounds, plaster and spackling to prepare wall surfaces for painting
- The waterproof sandpaper is designed for wet and dry sanding applications
- Quick-change hook and loop backing
- Sheets are made to be used with the Zip® Handy Block Sander

Item No.	Description	Grit	Grade	Pack Qty	Master
4121012	Refill Sheets	80/120/220	Assorted	8	10
4123012	Drywall Refills	80/100/120/150	Assorted	8	10
4125012	Waterproof Refills	220/320/400/600	Assorted	8	10

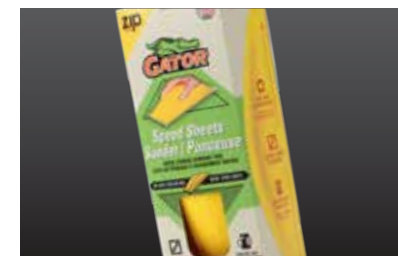

FOR USE WITH:
 • Gator hook & loop 1/3 sanding sheets

ZIP® SPEED SHEETS™ SANDER

Made to sand large areas, this comfortable and durable sanding block combined with premium sanding sheets will help you finish that project in no time. The ergonomic block provides maximum control and comfort, while the quick-change hook and loop holding systems make changing sheets fast and easy.

- The tool is made with a high-density foam which provides a cushioned sanding surface, helping to ease the fatigue that comes with hand sanding
- Quick-change hook and loop backing

Item No.	Grit	Grade	Pack Qty	Master
7820012	N/A	N/A	1	3

ZIP® SANDING TOOLS



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

ZIP® SPEED SHEETS™

These premium aluminum oxide sanding sheets provide maximum performance and long life. The durable aluminum oxide is bonded to a flexible latex paper making it perfect for hand sanding of irregular surfaces. The anti-clog coating reduces the build-up of sanding dust and particles, keeping the grain exposed for increased performance.

- These premium sanding sheets are perfect for sanding wood, metal fiberglass and painted surfaces
- The anti-clog stearate coating reduces particle build-up, keeping the grain exposed longer and improving performance
- Quick-change hook and loop backing
- Sheets are made to be used with the Zip® Speed Sheets Sander and the drywall clamp-on/hook and loop tools (See pages 51 and 70)

Item No.	Grit	Grade	Pack Qty	Master
7470012	60	Medium	5	15
7471012	80	Medium	5	15
7472012	100	Fine	5	15
7473012	120	Fine	5	15
7475012	150	Very Fine	5	15
7476012	180	Very Fine	5	15
7477012	220	Very Fine	5	15
7478012	320	Very Fine	5	15
7479012	400	Extra Fine	5	15



9"x11" SANDING SHEETS



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

GATOR® RUBBER SANDING BLOCK

Let's not forget the classic hand sanding block. Variations of this little guy have been around for generations but we like to think that we perfected it. This block will accommodate any cut-to-fit or stick-on standard sandpaper sheets.

- Solid and sturdy design for even sanding on flat surfaces
- Great for both wet and dry sanding
- Flat bottom is perfect for use with stick-on sandpaper

Item No.	Size	Pack Qty	Master
7280012	N/A	1	6



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 9"x11" ALL-PURPOSE SANDING SHEETS

Gator's multi-purpose aluminum oxide sandpaper provide excellent performance at a value price. These sheets are ideal for both hand and power tool sanding on wood, metal, fiberglass & painted surfaces.

- Aluminum oxide durable grains are tough and durable, and are recommended by professionals for sanding a wide variety of materials including wood, metal, fiberglass, drywall, and painted surfaces
- Resin bonding locks the grain to the paper for longer sanding life
- Heavy-duty paper backing is durable enough for both hand and power sanding
- Sheets can be cut-to-fit 1/2 sheet, 1/3 sheet, or 1/4 sheet sanders

Item No.	Grit	Grade	Pack Qty	Master
4439012	40	Coarse	3	100
4440012	60	Medium	4	100
4441012	100	Fine	5	100
4442012	150	Very Fine	5	100
4443012	220	Very Fine	5	100
Project Pack				
4445012	100/150/220	Assorted	1	50
Bulk Sheets				
3268	40	Coarse	1	250
3267	50	Coarse	1	250
3266	60	Medium	1	250
3265	80	Medium	1	250
3264	100	Fine	1	250
3263	120	Fine	1	250
3262	150	Very Fine	1	250
3261	180	Very Fine	1	250
3260	220	Very Fine	1	250

9"x11" SANDING SHEETS



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 9"x11" PREMIUM SANDING SHEETS

These premium aluminum oxide sanding sheets provide maximum performance and long life. The durable aluminum oxide is bonded to a flexible latex paper making it perfect for hand sanding of irregular surfaces. The anti-clog coating reduces the build-up of sanding dust and particles, keeping the grain exposed for increased performance.

- Made with premium aluminum oxide grain, which creates a consistent scratch pattern and helps create a finer final finish
- The anti-clog stearate coating reduces particle build-up, keeping the grain exposed longer and improving performance
- Heavy-duty latex backing is durable and flexible for improved hand sanding on irregular surfaces
- Sheets can be cut-to-fit 1/2 sheet, 1/3 sheet, or 1/4 sheet sanders

Item No.	Grit	Grade	Pack Qty	Master
Project Packs				
7260012	60	Medium	3	100
7261012	80	Medium	3	100
7262012	100	Fine	3	100
7263012	120	Fine	3	100
7264012	150	Very Fine	3	100
7265012	180	Very Fine	3	100
7266012	220	Very Fine	3	100
7267012	320	Very Fine	3	100
7268012	400	Extra Fine	3	100
7269012	80/120/220	Assorted	3	100
ProSelect Pack				
7288012	60	Medium	15	25
7281012	80	Medium	15	25
7289012	100	Fine	15	25
7282012	120	Fine	15	25
7286012	150	Very Fine	15	25
7287012	180	Very Fine	15	25
7283012	220	Very Fine	15	25
7284012	320	Very Fine	15	25
7285012	400	Extra Fine	15	25
7299012	80/120/220	Assorted	15	25
Bulk Sheets				
3381	60	Medium	1	250
3382	80	Medium	1	250
3383	100	Fine	1	250
3384	120	Fine	1	250
3385	150	Very Fine	1	250
3386	180	Very Fine	1	250
3387	220	Very Fine	1	250
3388	320	Very Fine	1	250
3389	400	Extra Fine	1	250

9"x11" SANDING SHEETS



FOR USE ON:
 • Automotive paints, urethane, acrylic enamel, varnish, lacquer, porcelain, fiberglass, metal, primer, clear coats

GATOR® 9"x11" WATERPROOF SANDING SHEETS

Our premium waterproof sheets are the ideal choice when wet sanding and finishing by hand are required. The latex backing provides maximum durability while being flexible enough for sanding curved or contoured surfaces. The tough grain helps produce exceptional finishes in wet sanding applications. We offer a full grit range that will take your project from start to finish.

- Made with premium grain, which offers a higher cut rate and uniform scratch pattern which makes it perfect for achieving fine finishes
- The flexible latex backing offers ultimate flexibility and allows the sheets to be soaked in water for an extended duration for wet sanding
- Use dry during the preparation phase of a project, usually when removing existing finishes, rust and oxidation. It is also key when sanding and shaping body fillers and primer coats
- Sheets can be cut-to-fit 1/2 sheet, 1/3 sheet, or 1/4 sheet sanders

Item No.	Grit	Grade	Pack Qty	Master
4473012	320	Very Fine	5	100
4472012	400	Extra Fine	5	100
4471012	600	Ultra Fine	5	100
Bulk Sheets				
3282	320	Very Fine	1	250
3281	400	Extra Fine	1	250
3280	600	Ultra Fine	1	250
3287	1500	Mirror Fine	1	250

GATOR® 9"x11" METAL EMERY CLOTH SHEETS

Emery cloth is perfect for deburring, tool mark removal and polishing applications. Emery cloth delivers a high degree of stock removal on fiberglass, hard woods and a variety of metals. The natural emery abrasive, closed coat design, and flexible cloth backing make it easy to scour and polish a variety of metals. A versatile choice for industrial or home applications, these sheets are compatible with sanding blocks or sanding boards and can also be used for hand sanding.

- Natural emery abrasive is ideal for scouring and polishing non-rated metals and utensils
- Easily tears into strips for sanding scuffing, and cleaning metal pipes
- Can be used dry or with oil
- Sheets can be cut-to-fit 1/2 sheet, 1/3 sheet, or 1/4 sheet sanders



FOR USE ON:
 • Steel, iron, aluminum, brass, copper

Item No.	Grit	Grade	Pack Qty	Master
4447012	50/80/150	Assorted	3	100
Bulk Sheets				
3292	50	Coarse	1	250
3291	80	Medium	1	250
3290	150	Very Fine	1	250
3294	800 (crocus cloth)	Super Fine	1	250

SANDING SPONGES



FOR USE ON:

- Wood, metal, fiberglass, plastic, painted surfaces



Scan the QR code to view the Gator Finishing Sanding Sponge video

GATOR® 3"x5"x1" PREMIUM SUPER SANDING SPONGE

This exceptional sponge takes the performance and quality of premium grain latex-backed sandpaper and adds the convenience of a built-in sanding block. These innovative premium sanding sponges greatly outperform traditional sanding sponges and provide much better finishing results. Offered in a wide and specific grit range to take your project from beginning to end.

- Perfect for use on wood, metal, fiberglass and painted surfaces
- Extra flexible for sanding irregular shapes, contours, and corners
- The anti-clog stearate coating reduces particle build-up
- The high-performance premium grain cuts faster

Item No.	Grit	Grade	Pack Qty	Master
736101220	60	Medium	1	20
734101220	80	Medium	1	20
736201220	100	Fine	1	20
734201220	120	Fine	1	20
736401220	150	Very Fine	1	20
736501220	180	Very Fine	1	20
734301220	220	Very Fine	1	20
734401220	320	Very Fine	1	20
736301220	400	Extra Fine	1	20
Item No.	Grit	Grade	Pack Qty	Master
7353012	100	Fine	2	25
7352012	120	Fine	2	25



FOR USE ON:

- Wood, metal, fiberglass, plastic, painted surfaces, drywall

GATOR® 3"x5"x1" JUMBO SANDING SPONGES

These general-purpose sanding sponges combine good performance with great value. These four-sided sponges are ideal when sanding and finishing wood, metal, drywall, fiberglass and painted surfaces. After use, these sponges can be rinsed and reused for the next project.

- Great for general purpose sanding on wood, metal, drywall, fiberglass and painted surfaces
- Extra flexible for sanding irregular shapes, contours, and corners
- Sponges can be used wet or dry
- Abrasive grit is on all four sides giving you full use of the sponge

Item No.	Grit	Grade	Pack Qty	Master
730801220	60/80	Coarse/Medium	1	20
730901220	80/120	Fine/Medium	1	20
4632012	80	Medium	1	50
Item No.	Grit	Grade	Pack Qty	Master
731001210	60/80	Coarse/Medium	2	10
731101210	80/120	Medium/Fine	2	10
Item No.	Grit	Grade	Pack Qty	Master
7234012	60/80, 80/120	Coarse/Medium, Medium/Fine	5	10

SANDING SPONGES



FOR USE ON:

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 2-1/2"x5"x1" EDGEPROTECT DUAL-ANGLE SANDING SPONGES

These angle sponges will leave the corners of your drywall project looking like you've hired a professional. These foam sponges are extremely durable and long lasting as you finish up those final details. The angle allows you to get right into the corner to create a clean, crisp line, while the unique soft edge prevents adjacent surface contact.

- Angled sanding sponges are perfect for sanding into corners
- Extra flexible for sanding irregular shapes, contours, and corners
- Sponges can be used wet or dry
- Abrasive grit is on all four sides giving you full use of the sponge

	Item No.	Grit	Grade	Pack Qty	Master
	4638012	120	Fine	1	50
	4637012	80	Medium	1	50
Bulk Sheets					
	711501210	120	Fine	2	10
	711601210	80	Medium	2	10



FOR USE ON:

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 3"x5"x1" JUMBO AND DUAL-ANGLE SANDING SPONGES

These dual-angle sanding sponges will leave the corners of your drywall project looking like you've hired a professional. The foam sponge is extremely durable and long lasting as you finish up those final details. The angle allows you to get right into the corner to create a clean, crisp line, while the unique soft edge prevents adjacent surface contact.

- Angled sanding sponges are perfect for sanding into corners
- Extra flexible for sanding irregular shapes, contours, and corners
- Sponges can be used wet or dry
- Abrasive grit is on all four sides giving you full use of the sponge

Item No.	Grit	Grade	Pack Qty	Master
3587012	80/120/120	Fine/Medium/Fine	5	4

SANDING SPONGES

**FOR USE ON:**

- Drywall, wood, metal, fiberglass, painted surfaces

GATOR® LARGE AREA DRYWALL SANDING SPONGE

Our large area dual grit sanding sponge is perfect for finish sanding and preparation of drywall, drywall joints, and painted surfaces. This four-sided sponge is also ideal for sanding and finishing wood, metal, and fiberglass. After use, it can be rinsed and reused for the next project.

- Extra flexible for sanding irregular shapes, contours, and corners
- Abrasive grit is on all four sides giving you full use of the sponge
- Sponges can be used wet or dry

Item No.	Size	Grit	Grade	Pack Qty	Master
7312012	3" x 10"	80/120	Medium/Fine	1	10

**FOR USE ON:**


- Drywall, joint compounds, spackling, and paint scuffing

GATOR® LARGE AREA SINGLE ANGLE DRYWALL SANDING SPONGE

Our large area dual grit sanding sponge is perfect for finish sanding and preparation of drywall, drywall joints, and painted surfaces. This four-sided sponge is also ideal for sanding and finishing, wood, metal, and fiberglass. After use, it can be rinsed and reused for the next project.

- Angled sanding sponges are perfect for sanding into corners
- Extra flexible for sanding irregular shapes, contours, and corners
- Sponges can be used wet or dry
- The soft edge helps prevent adjacent surface contact

Item No.	Size	Grit	Grade	Pack Qty	Master
7127012	3-3/8" x 8"	120	Fine	1	10

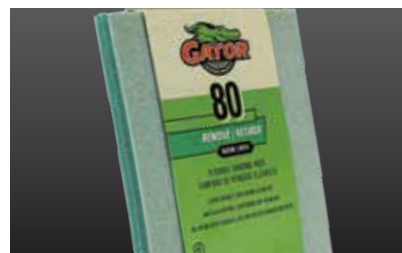**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 4-1/2"x5-1/2" FLEXIBLE SANDING PADS

Some sanding projects require a more flexible option and these sanding pads are the right choice. The thinner, more flexible designs make these pads easier to use in tight spaces or for curves and contours.

- Great for general purpose sanding on wood, metal, drywall, fiberglass and painted surfaces
- Extra flexible for sanding irregular shapes, contours, and corners
- Great for sanding poles and unique shaped items
- Pads can be used wet or dry

Item No.	Grit	Grade	Pack Qty	Master
4650012	80	Medium	2	20
4651012	120	Fine	2	20
4652012	220	Very Fine	2	20

SANDING SPONGES

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 3"x4"x1" ALL-PURPOSE SANDING SPONGES

These general-purpose sanding sponges combine good performance with great value. These four-sided sponges are ideal when sanding and finishing wood, metal, drywall, fiberglass and painted surfaces. After use, these sponges can be rinsed and reused for the next project.

- Great for general purpose sanding on wood, metal, drywall, fiberglass and painted surfaces
- Extra flexible for sanding irregular shapes, contours, and corners
- Sponges can be used wet or dry
- Abrasive grit is on all four sides giving you full use of the sponge

Item No.	Grit	Grade	Pack Qty	Master
3563012	80/120	Medium/Fine	5	4
3564012	60/80	Coarse/Medium	5	4

Item No.	Grit	Grade	Pack Qty	Master
7278012	80/120	Medium/Fine	10	5



POWER SANDING

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 9"x11" RED RESIN SANDING SHEETS

These premium aluminum oxide grain sanding sheets are manufactured with the highest standards in the industry and are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding sheets.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding
- The extreme duty backing resists tearing and wear
- The double resin bonding system resists heat and humidity
- Sheets can be cut-to-fit 1/2 sheet, 1/3 sheet, or 1/4 sheet sanders

Item No.	Grit	Grade	Pack Qty	Master
7798012	80	Medium	8	50
7797012	100	Medium	8	50
7796012	120	Fine	8	50
7795012	220	Very Fine	8	50

**FOR USE ON:**

- Automotive paints, urethane, acrylic enamel, varnish, lacquer, porcelain, fiberglass, metal, primer, clear coats

GATOR® 9"x11" WATERPROOF SANDING SHEETS

Our premium waterproof sheets are the ideal choice when wet sanding. The latex backing provides maximum durability while being flexible enough for sanding curved or contoured surfaces. The tough grain helps produce exceptional finishes in wet sanding applications. We offer a full grit range that will take your project from start to finish.

- The flexible latex backing offers ultimate flexibility and allows the sheets to be soaked in water for an extended duration for wet sanding
- Use dry during the preparation phase of a project, usually when removing existing finishes, rust and oxidation. It is also key when sanding and shaping body fillers and primer coats
- Made with premium grain, which offers a higher cut rate and uniform scratch pattern which makes it perfect for achieving fine finishes
- Sheets can be cut-to-fit 1/2 sheet, 1/3 sheet, or 1/4 sheet sanders

Item No.	Grit	Grade	Pack Qty	Master
7810012	320	Very Fine	5	50
7814012	400	Extra Fine	5	50
7811012	600	Micro Fine	5	50
7812012	1200	Micro Fine	5	50
7813012	2000	Mirror Fine	5	50

POWER SANDING

**FOR USE WITH:**

- Orbital sanders to replace worn out pads

GATOR® 5" 8-HOLE HOOK & LOOP CONVERSION KIT

As your random orbit sander is used over time, the hook and loop pad will become worn and needs to be replaced. The hook and loop replacement and conversion kit contains everything you need to convert or replace 2 hook and loop pads.

- Save money by not having to purchase brand-new hook and loop pad for your sander
- For use on worn out random orbit sander pads

Item No.	Description	Pack Qty	Master
3727012	5" 8-Hole Hook & Loop Conversion Kit	1	10

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 5" 8-HOLE HOOK & LOOP SANDING DISCS

These premium aluminum oxide grain sanding discs are manufactured with the highest standards in the industry and are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding discs.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding
- Quick-change hook & loop backing
- The vented hole pattern matches the sanders pad for maximum dust extraction
- The double resin bonding system resists heat and humidity, extending the life of the sanding discs

Item No.	Grit	Grade	Pack Qty	Master
3725012	60	Medium	5	50
3724012	80	Medium	5	50
3723012	120	Fine	5	50
3721012	220	Very Fine	5	50
Value Pack				
4144012	60	Medium	15	20
4142012	80	Medium	15	20
4141012	120	Fine	15	20
4140012	220	Very Fine	15	20
Commercial Pack				
4347012	40	Extra Coarse	50	4
4345012	60	Medium	50	4
4344012	80	Medium	50	5
4342012	120	Fine	50	5
4340012	220	Very Fine	50	5

POWER SANDING



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 5" 5-HOLE HOOK & LOOP SANDING DISCS

These premium aluminum oxide grain sanding discs are manufactured with the highest standards in the industry and are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding discs.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding
- Quick-change hook & loop backing
- The vented hole pattern matches the sanders pad for maximum dust extraction
- The double resin bonding system resists heat and humidity, extending the life of the sanding discs

Item No.	Grit	Grade	Pack Qty	Master
Value Pack				
4149012	60	Medium	15	20
4147012	80	Medium	15	20
4146012	120	Fine	15	20
4145012	220	Very Fine	15	20



FOR USE ON:
 • Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 5" STICK-ON DRILL MOUNTED BACKER PAD

This quality backer pad is made with a flexible rubber and rigid backing making it the perfect backer pad for flawless sanding on flat or contoured surfaces.

- The tapered edge allows you to better sand into corners
- The flexible yet sturdy pad helps to deliver a fine final finish on flat surfaces
- The pad is made to be used with pressure sensitive stick-on sanding discs which will hold securely without slipping, tearing, or wrinkling
- For use with electric drills

Item No.	Description	Pack Qty	Master
3051012	5" Stick-On Backer Pad	1	10



FOR USE ON:
 • Wood, metal, fiberglass, painted surfaces

GATOR® 5" STICK-ON SANDING DISCS

These premium aluminum oxide grain sanding discs are manufactured with the highest standards in the industry and are designed for heavy duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding discs.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding
- The strong adhesive backing holds the sanding disc securely to the sander without slipping, tearing, or wrinkling
- For use with random orbit sander or electric drill with back-up pad attachment

Item No.	Grit	Grade	Pack Qty	Master
4154012	40	Coarse	12	20
4152012	60	Medium	15	20
4151012	100	Fine	15	20

POWER SANDING



FOR USE WITH:
 • 6-inch stick-on sanding discs

GATOR® 6" STICK-ON DA BACKER PAD

This quality DA pad is made with a flexible rubber and rigid backing making it the perfect backer pad for flawless sanding on flat or contoured surfaces.

- The tapered edge allows you to better sand into corners
- The flexible yet sturdy pad helps to deliver a fine final finish on flat surfaces
- The pad is made to be used with pressure sensitive stick-on sanding discs which will hold securely without slipping, tearing, or wrinkling
- For use with 6-inch DA sanders

Item No.	Description	Pack Qty	Master
5247012	6" Stick-On DA Backer Pad	1	10



FOR USE ON:
 • Body filler, metal, fiberglass, painted surfaces, wood

GATOR® 6" GOLD STEARATE STICK-ON SANDING DISC

These premium aluminum oxide grain sanding discs are manufactured with the highest standards in the industry and are designed for heavy-duty stripping and preparing primed and painted surfaces, sanding of plastics, fiberglass and composites, light weld blending, preparing and finishing metal, and sanding gel coat and body filler compounds.

- Made with premium aluminum oxide grain, which creates a consistent scratch pattern and helps create a finer final finish
- The strong adhesive backing holds the sanding disc securely to the sander without slipping, tearing, or wrinkling
- Reduced loading makes it ideal for use on body-filler, fiberglass, and composites
- For use with disc, orbital, and DA sanders with stick-on (pressure sensitive adhesive) backer pads

Item No.	Grit	Grade	Pack Qty	Master
3245012	80	Medium	20	20
3243012	120	Fine	25	20
3241012	220	Very Fine	25	20



FOR USE WITH:
 • Fiber discs or surface conditioning discs

GATOR® 4-1/2" ANGLE GRINDER BACKER PAD

This premium quality back-up pad is designed to support resin fiber and surface conditioning discs when used with handheld angle grinders.

- Supports 4-1/2 inch surface conditioning and fiber discs

Item No.	Description	Pack Qty	Master
3017012	4-1/2" Angle Grinder Backer Pad	1	10

POWER SANDING



FOR USE ON:

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 4-1/2" RESIN FIBER DISC

Our fiber discs are constructed with a vulcanized fiber backing and are used for a wide variety of applications. Use for heavy stock removal, grinding down and blending welds, rust removal, finishing, deburring metal and high production work; automotive, plastics, ferrous metals, paint, body fillers and fiberglass.

- Made with a tough aluminum oxide grain which is recommended by professionals for sanding a wide variety of surfaces
- The heavy-duty fiber backing holds up with even the toughest jobs
- For use with a 4-Inch right-angle grinder (RAG) with a fiber disc backer pad

Item No.	Grit	Grade	Pack Qty	Master
3073012	36	Extra Coarse	3	50
3072012	50	Coarse	3	50
3071012	80	Medium	3	50



FOR USE ON:

- Wood, metal, fiberglass, painted surfaces, concrete, engineered stone, granite, marble, ceramics

GATOR® 4-1/2" FLAP DISC

Flap discs are a great choice to sand, grind and remove rust and paint from metal surfaces. These flap discs are used for removing large amounts of material and for shaping or smoothing wood, metal, and masonry. The ultra-tough grain also makes these discs perfect for more aggressive applications like removing welds and finishing of ferrous and non-ferrous material. Designed for right angle grinder applications ranging from heavy stock removal to surface blending.

- Best for rapid removal of paint and rust, as well as knocking down welds
- Perfect for removing rust and deburring metal
- Great for grinding, Stock Removal, Weld Blending, Deburring, Deflashing, Rust Removal, Blending, Cleaning and Finishing, Wood, Metal, Fiberglass, Painted Surfaces, Concrete, Engineered Stone, Granite, Marble, Ceramics
- The heavy-duty cloth abrasive flaps are bonded to a fiberglass reinforced backing plate for extra durability

Item No.	Grit	Grade	Pack Qty	Master
9713012	36	Extra Coarse	1	10
9718012	80	Medium	1	10



FOR USE ON:

- Wood, metal, plastic, painted surfaces

GATOR® 4-1/2" SURFACE CONDITIONING DISC

Surface conditioning discs are made from a tough non-woven nylon web and are perfect for removing surface defects and blending uneven finishes.

- Perfect for use on a variety of surfaces including metal, plastic, and wood
- Resists clogging and particle build-up, improving performance
- Does not damage or remove base material
- For use with orbital sanders or 4-1/2-Inch right angle grinder (RAG) with a fiber disc backer pad

Item No.	Grit	Grade	Pack Qty	Master
3876012	50	Coarse	2	20
3875012	80	Medium	2	20
3874012	180	Very Fine	2	20

POWER SANDING



FOR USE ON:

- Paint, metal, rush, wood, fiberglass

GATOR® 4-1/2" STRIPPING WHEEL

The open-webbed, semi-flexible design of this wheel makes it easy to strip edges, contours and uneven surfaces without gouging. Grain is uniformly distributed throughout the wheel, allowing for aggressive removal of paint and rust.

- Great for stripping rust, paint, and other surface defects on metal, wood, and fiberglass
- The open weave design resists loading
- Abrasive web won't rust or splinter
- For use with 4-1/2-Inch right angle grinder (RAG)

Item No.	Grit	Grade	Pack Qty	Master
9483012	36	Extra Coarse	1	10



FOR USE ON:

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® ALL-PURPOSE CLAMP-ON 1/4 SANDING SHEETS

Gator's multi-purpose aluminum oxide sandpaper provide excellent performance at a value price. These sheets are ideal for both hand and power tool sanding on wood, metal, fiberglass and painted surfaces.

- Aluminum oxide durable grains are tough and durable, and are recommended by professionals for sanding a wide variety of materials including wood, metal, fiberglass, drywall, and painted surfaces
- Resin bonding locks the grain to the paper for longer sanding life
- Heavy-duty paper backing is durable enough for both hand and power sanding
- Fits 1/4 sheet clamp-on palm sanders

Item No.	Grit	Grade	Pack Qty	Master
5033012	60	Medium	6	50
5032012	100	Fine	6	50
5031012	150	Very Fine	6	50



FOR USE ON:

- Wood, metal, fiberglass, painted surfaces

GATOR® RED RESIN CLAMP-ON 1/3 SANDING SHEETS

These premium aluminum oxide grain sanding sheets are manufactured with the highest standards in the industry and are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding sheets.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding
- The double resin bonding system resists heat and humidity
- Fits 1/3 sheet clamp-on palm sanders

Item No.	Grit	Grade	Pack Qty	Master
5144012	80/100/120/220	Assorted	12	100

POWER SANDING

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® RED RESIN CLAMP-ON 1/4 SANDING SHEETS

These premium aluminum oxide grain sanding sheets are manufactured with the highest standards in the industry and are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding sheets. Aluminum oxide durable grains are tough and durable, and are recommended by professionals for sanding a wide variety of materials including wood, metal, fiberglass, drywall, and painted surfaces.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding
- The double resin bonding system resists heat and humidity
- Fits 1/4 sheet clamp-on palm sanders

Item No.	Grit	Grade	Pack Qty	Master
5139012	80	Medium	25	20
5138012	100	Fine	25	20
5137012	120	Fine	25	20
5136012	220	Very Fine	25	20

**FOR USE WITH:**

- Sanding belts, discs and drums

GATOR® ABRASIVE CLEANING STICK

Abrasive cleaning sticks are made to clean the abrasive surface of your sanding discs or belts. Simply apply the cleaning stick to the surface of your abrasive and watch the sanding dust and debris quickly disappear ... making your abrasives like new again! (Note: please exercise extreme caution during this process as your power tool must be running to allow the abrasive cleaning stick to work properly)

- Removes sanding dust and particles from power tool abrasives
- Lubricates abrasive surface to minimize clogging
- Made with natural rubber
- For use on sanding belts, discs and drums

Item No.	Description	Pack Qty	Master
3454012	4" Abrasive Cleaning Stick	1	10

POWER SANDING

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® RED RESIN SANDING BELTS

When it comes to sanding very rough surfaces, or rough flattening of boards nothing beats the power of a sanding belt. The high-quality aluminum oxide grain coupled with the strong durable cloth backing, makes our belts the perfect tool for removing serious amounts of wood. These sanding belts are perfect for heavy-duty sanding and rapid removal of material from wood, metal, fiberglass and painted surfaces. You can also use finer grits for rough sharpening of tools like axes, shovels, knives, and chisels.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding

- The bi-directional flush joint allows the sanding belt to run smoothly in both directions
- Advanced resin-bonding system for increased durability and performance
- The extreme duty poly-cotton cloth backing resists tearing and wear

Item No.	Size	Grit	Grade	Pack Qty	Master
Benchtop Sander Belts					
3211012	1"x30"	80	Medium	3	50
Portable Sander Belts					
7035012	3"x18"	40	Coarse	5	4
7034012	3"x18"	50	Coarse	5	4
7032012	3"x18"	80	Medium	5	5
7030012	3"x18"	120	Fine	5	5
7019012	3"x21"	40	Coarse	5	4
7012012	3"x21"	50	Coarse	5	4
7011012	3"x21"	80	Medium	5	5
7010012	3"x21"	120	Fine	5	5
7046012	3"x24"	40	Coarse	5	4
7015012	3"x24"	50	Coarse	5	5
7014012	3"x24"	80	Medium	5	5
7013012	3"x24"	120	Fine	5	5
7023012	4"x24"	40	Coarse	5	4
7022012	4"x24"	80	Medium	5	5
7021012	4"x24"	120	Fine	5	5

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® RED RESIN MOUSE™ DETAIL SHEETS

Detail sanding sheets are specifically designed to allow you to sand in corners and tight spaces. These premium aluminum oxide grain sheets are manufactured with the highest standards in the industry and are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding sheets.

- Red resin aluminum oxide grain runs cooler and is designed for high speed sanding

- Quick-change hook & loop backing
- The vented hole pattern matches the sanders pad for maximum dust extraction
- The double resin coating locks the grain to the paper, and helps to resist build-up and humidity increasing the life of the sanding sheet

Item No.	Grit	Grade	Pack Qty	Master
3733012	60	Medium	5	50
3753012	80	Medium	5	25
3754012	120	Fine	5	25
3730012	220	Very Fine	5	50

POWER SANDING

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® CERAMIC MOUSE™ DETAIL SHEETS

These premium ceramic detail sanding sheets are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding sheets. The ultra-tough ceramic grain makes these sheets perfect for more aggressive applications like removing welds and finishing of ferrous and non-ferrous material.

- The high-performance premium ceramic grain cuts faster, creates a consistent scratch pattern, and helps create a finer final finish
- Quick-change hook & loop backing
- The vented hole pattern matches the sanders pad for maximum dust extraction
- The double resin coating locks the grain to the paper, and helps to resist build-up and humidity increasing the life of the sanding sheet

Item No.	Grit	Grade	Pack Qty	Master
7757012	50	Coarse	12	20
7756012	80	Medium	12	20
7755012	120	Fine	12	20
7774012	220	Very Fine	12	20

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 3" CERAMIC OSCILLATING DETAIL SHEETS

These premium ceramic detail sanding sheets are designed for heavy-duty sanding and grinding of wood, metal, fiberglass and painted surfaces. The resin bonding system resists heat and moisture, which extends the useful life of the sanding sheets. The ultra-tough ceramic grain makes these sheets perfect for more aggressive applications like removing welds and finishing of ferrous and non-ferrous material.

- The high-performance premium ceramic grain cuts faster, creates a consistent scratch pattern, and helps create a finer final finish
- Quick-change hook & loop backing
- The double resin coating locks the grain to the paper, and helps to resist build-up and humidity increasing the life of the sanding sheet
- For use with multi-tool detail sanders for extra durability

Item No.	Grit	Grade	Pack Qty	Master
3770012	50	Coarse	12	20
3771012	80	Medium	12	20
3773012	120	Fine	12	20

**FOR USE ON:**

- Removing rust, oxidation, gasket material and other surface imperfections

GATOR® 2" MINI CONDITIONING DISCS KIT

This professional quality surface preparation kit contains the backer pad and assorted discs for a fast, efficient method for grinding, blending, leveling, and finishing metal surfaces.

- The surface conditioning discs provide a burr-free finish and remove grinding marks, rust, and surface coatings
- The grinding discs provide a fast, efficient method of grinding, blending, leveling, and finishing metal surfaces
- The discs quickly and securely lock in place with a twist
- For use with an electric drill or die grinder

Item No.	Grit	Grade	Pack Qty	Master
2225012	24/36/50	Assorted	1	20

POWER SANDING

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® DRUM SANDING KIT

Designed for sanding and grinding irregular shapes, contours and hard- to-reach areas. These premium double resin bonded aluminum oxide sanding drums are ideal for use on wood, metal, fiberglass and painted surfaces.

- Great for sanding and grinding irregular shapes, contours and hard- to-reach areas
- Resin-bonded to resist heat and humidity for longer life
- For use with electric drills
- Kits include sanding drum and sanding sleeves

Item No.	Size	Grit	Grade	Pack Qty	Master
6095012	3/4" x 1"	50/80/120	Assorted	1	5
6096012	1-1/2" x 1-1/2"	50/80/120	Assorted	1	5

**FOR USE ON:**

- Wood, metal, fiberglass, plastic, painted surfaces

GATOR® 4" DRILL MOUNTED STRIPPING WHEEL

The open-webbed, semi-flexible design of this wheel makes it easy to strip edges, contours and uneven surfaces without gouging. Grain is uniformly distributed throughout the wheel, allowing for aggressive removal of paint and rust.

- Great for stripping rust, paint, and other surface defects on metal, wood, and fiberglass
- The open weave design resists loading
- Abrasive web won't rust or splinter
- For use with electric drills

Item No.	Grit	Grade	Pack Qty	Master
9485012	36	Extra Coarse	2	5

SYNTHETIC FINISHING PADS

**FOR USE ON:**

- Glass, fiberglass, porcelain, stainless steel, chrome, wood

GATOR® 3-7/8" X 6" MULTI-SURFACE HAND STRIPPING TOOL KIT

Gator Synthetic Finishing Pads are the best alternative to traditional steel wool. The non-woven synthetic mesh design performs like steel wool without the mess and inconvenience. Offered in several sizes and grades for cleaning to surface preparation. These finishing pads are waterproof and can be used with cleaners and chemical strippers.

- Surface cleaning, removing old finishes, between coat scuffing and surface preparation
- Best alternative to traditional steel wool — does not shred, tear or splinter
- Waterproof can be used with cleaners, strippers and solvents

Item No.	Grit	Grade	Pack Qty	Master
7321012	#3 (Tool)	Extra Coarse	1	5
7322012	#3	Extra Coarse	1	50
7323012	#2	Coarse	2	50
7324012	#0	Fine	2	50

DRYWALL



FOR USE ON:
 • Drywall, joint compounds, spackling, and paint scuffing

GATOR® DRYWALL CLAMP-ON/HOOK & LOOP SANDING TOOLS

Finish large areas of drywall, ceilings, floors, decking quickly with this combination hook and loop, clamp-on hand sander.

- Larger sanding area allows you to cover more area in a shorter amount of time
- The clamp fits all standard clamp-on drywall sanding sheets and screens
- Can be used with both clamp-on and hook and loop drywall sanding sheets
- Perfect for use with Zip® Hook & Loop Large Sanding Block Refill Sheets (See page 56)

Item No.	Size	Type	Pack Qty	Master
7190012	50	Hand Sanding Tool	1	4
7191012	80	Pole Sanding Tool	1	6



FOR USE ON:
 • Drywall, joint compounds, spackling, and paint scuffing

GATOR® DRYWALL CLAMP-ON PRECUT SANDING SCREENS

Drywall sanding Screen is ideal for finishing drywall prior to painting, feathering of joint compounds and spackling and scuff sanding painted walls before applying new paint. The nylon open mesh design allows sanding dust and debris to pass through, reducing clogging while the dual sided grit doubles the life of the sheet, simply turn it over and you have a brand-new sheet to sand with. This waterproof screen can also be rinsed with water and reused, extending the life of the screen.

- Open mesh design does not tear like paper, and allows debris to pass through reducing clogging
- Dual sided abrasive surfaces for longer life... turn sheet over to expose a fresh cutting surface
- Made with sharp, fast cutting grain which produces a smoother finish on drywall
- Precut and notched to fit most drywall hand and pole sanders

Item No.	Grit	Grade	Pack Qty	Master
Screen Size 3-5/16" x 11"				
8573012	80	Medium	2	100
8575012	120	Fine	2	100
8577012	220	Very Fine	2	100
Screen Size 4-1/4" x 11-1/4"				
8563012	80	Medium	2	15
8564012	100	Fine	2	15
8565012	120	Fine	2	15
8566012	150	Very Fine	2	15
Value Pack				
865615	80	Medium	5	15
865815	120	Fine	5	15
866015	220	Very Fine	5	15
Commercial Pack				
865010	80	Medium	25	10
865210	120	Fine	25	10
865410	220	Very Fine	25	10

DRYWALL



FOR USE ON:
 • Drywall, joint compounds, spackling, and paint scuffing

GATOR® DRYWALL CLAMP-ON PRECUT SANDING SHEETS

Drywall sandpaper sheets are the most economical and efficient way to prepare drywall surfaces. Designed for sanding and feathering drywall joint compounds, plaster and spackling to prepare wall surfaces for painting. It is also ideal for scuffing painted interior walls before repainting.

- Made with sharp, fast cutting grain which produces a smoother finish on drywall
- Resin coating locks the grain to the paper, and help to resist build-up and humidity increasing the life of the drywall sheet
- The heavy-duty paper resists tearing
- Precut and notched to fit most drywall hand and pole sanders

Item No.	Grit	Grade	Pack Qty	Master
Screen Size 4-1/4" x 11-1/4"				
856830	100	Fine	5	30
856930	150	Very Fine	5	30
Value Pack				
866815	80	Medium	10	15
867015	100	Fine	10	15
867215	150	Very Fine	10	15
Commercial Pack				
866210	80	Medium	50	10
866410	100	Fine	50	10
866610	150	Very Fine	50	10



FOR USE ON:
 • Drywall, joint compounds, spackling, wood, metal, plastic, fiberglass, and paint scuffing

GATOR® DRYWALL HOOK & LOOP SHEET SANDING TOOLS

Finish large areas of drywall, ceilings, floors, decking quickly with these hook and loop sanding tools. The tapered edge won't damage walls when you sand into corners, and the quick change hook and loop backing means you will get through your project much quicker.

- Larger sanding area allows you to cover more area in a shorter amount of time
- Tapered edge sanding into corners without damaging adjoining wall
- Quick-change hook & loop backing

Item No.	Size	Type	Pack Qty	Master
7231012	10" x 4"	Hand Sanding Tool	1	4
7153012	10" x 4"	Pole Sanding Tool Head	1	3
868404	10" x 4"	Pole Sanding Tool W/ Pole	1	4

DRYWALL



FOR USE ON:
 • Drywall, joint compounds, spackling, and paint scuffing

GATOR® 4-1/2" x 10-1/2" DRYWALL HOOK & LOOP PRECUT SANDING SHEETS

Drywall sandpaper sheets are the most economical and efficient way to prepare drywall surfaces. Designed for sanding and feathering drywall joint compounds, plaster and spackling to prepare wall surfaces for painting. It is also ideal for scuffing painted interior walls before repainting.

- Quick-change hook & loop backing
- The heavy-duty paper resists tearing
- Resin coating locks the grain to the paper, and helps to resist build-up

Item No.	Grit	Grade	Pack Qty	Master
868610	80	Medium	6	10
868810	100	Fine	6	10
869010	120	Fine	6	10
869210	150	Very Fine	6	10
Commercial Pack				
716304	120	Fine	25	4



FOR USE ON:
 • Drywall, joint compounds, spackling, wood, metal, fiberglass, and paint scuffing

ZIP® HOOK & LOOP 9" RADIAL SANDER

Finish large areas of drywall, ceilings, floors, decking quickly with this 9-Inch radial sander that fits on the end of any standard drywall pole. The tapered edge won't damage walls when you sand into corners, and the quick-change hook and loop backing means you will get through your project much quicker.

- Larger sanding area allows you to cover more area in a shorter amount of time
- Tapered foam edge will sand into corners without damaging walls
- Quick-change hook & loop backing
- No-flip joint for easy 360 movement

Item No.	Grit	Grade	Pack Qty	Master
6459012	N/A	N/A	1	3



FOR USE ON:
 • Drywall, joint compounds, spackling, wood, metal, fiberglass, and paint scuffing

ZIP® HOOK & LOOP 9" RADIAL SANDER REFILL SHEETS

These premium aluminum oxide sanding sheets provide maximum performance and long life. The durable aluminum oxide is bonded to a flexible latex paper making it perfect for hand sanding of irregular surfaces. The anti-clog coating reduces the build-up of sanding dust and particles, keeping the grain exposed for increased performance.

- The high-performance ceramic grain sands faster, lasts longer, and runs cooler to reduce heat build-up during sanding
- Quick-change hook & loop backing
- For use with the Zip® 9-Inch Radial Sander, these ceramic sanding discs are best for final surface preparation on wood, metal, fiberglass, drywall, and painted surfaces

Item No.	Grit	Grade	Pack Qty	Master
6427012	80	Medium	3	5
6428012	120	Fine	3	5
6429012	180	Very Fine	3	5

DRYWALL




FOR USE ON:
 • Drywall, joint compounds, spackling, and paint scuffing

GATOR® 3" x 5" x 1" DRYWALL SANDING SPONGES

These general purpose sanding sponges combine good performance with great value. These four-sided sponges are ideal when sanding and finishing wood, metal, drywall, fiberglass and painted surfaces. After use, these sponges can be rinsed and reused for the next project.

- Extra flexible for sanding irregular shapes, contours, and corners
- Abrasive grit is on all four sides giving you full use of the sponge
- Rinse and reuse for longer life
- For use on wood, metal, drywall, fiberglass, and painted surfaces

Item No.	Grit	Grade	Pack Qty	Master
867615	60/80	Coarse/Medium	2	15
867415	80/120	Medium/Fine	2	15

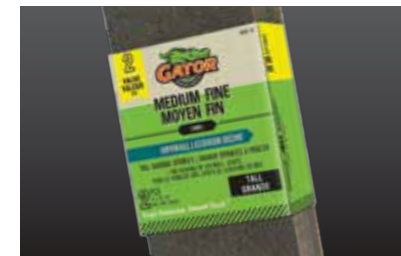

FOR USE ON:
 • Drywall, joint compounds, spackling, and paint scuffing

GATOR® 3" x 10" x 1" LARGE AREA DRYWALL SANDING SPONGE

This large area dual grit sanding sponge is perfect for finish sanding and preparation of drywall, drywall joints, and painted surfaces. This four-sided sponge is also ideal for sanding and finishing wood, metal, and fiberglass. After use, it can be rinsed and reused for the next project.

- Extra flexible for sanding irregular shapes, contours, and corners
- Abrasive grit is on all four sides giving you full use of the sponge
- Rinse and reuse for longer life
- For use on wood, metal, drywall, fiberglass, and painted surfaces

Item No.	Grit	Grade	Pack Qty	Master
868210	80/120	Medium/Fine	2	10



FOR USE ON:
 • Drywall, joint compounds, spackling and paint scuffing

GATOR® 2-1/2" x 5" x 1" DRYWALL ANGLE SANDING SPONGES

These general purpose sanding sponges combine good performance with great value. These four-sided sponges are ideal when sanding and finishing wood, metal, drywall, fiberglass and painted surfaces. The soft edge helps prevent adjacent surface contact. After use, these sponges can be rinsed and reused for the next project.

- Extra flexible for sanding irregular shapes, contours, and corners
- Abrasive grit is on all four sides giving you full use of the sponge
- Angled sanding sponges are perfect for sanding into corners
- Sponges can be used wet or dry

Item No.	Grit	Grade	Pack Qty	Master
868010	80	Medium	2	10
867810	120	Fine	2	10



Concrete Prep, Patch & Repair

Rust-Oleum's expertise in surface protection doesn't stop at metal. Our complete selection of concrete prep, patch and repair products are formulated to deliver contractor-grade protection and are easy to apply using in-house maintenance crews. Our concrete repair products cure fast to minimize downtime and provide lasting durability for long-term protection.



Scan the QR code to view a Concrete Savers Solutions video



FOR USE ON:

- Spalled or damaged concrete floors
- Curbs, ramps and walkways
- Decks and traffic routes

TURBOKRETE® CONCRETE PATCHING COMPOUND

High performance, 100% solids epoxy patch kit repairs damaged concrete, fills deep holes, and protects against abrasion, impact and most chemicals.


- Restores damaged curbs and severely spalled floors
- 3-4 times stronger than concrete
- Easy-mix, trowel — applied fast-cure formula
- Dries quickly — return to service in 1½-4 hours for light traffic and 6-8 hours for heavy traffic
- For indoor and outdoor use

SIZE (2 gallon)

■ **253479** Light Grey kit (.15 cu. ft.)

SIZE (3.5 gallon)

■ **5494323** Light Grey kit (.30 cu. ft.)

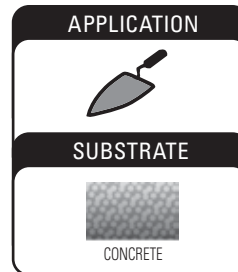

Scan the QR code to view a How to Repair Concrete Cracks video



FOR USE ON:

- Cracked or damaged concrete floors


5499 SYSTEM CONCRETE PATCHING COMPOUND

100% solids epoxy patch kit specially formulated for repairing small holes or pores.

- Works on concrete, wood, fiberglass and brick with no priming
- Up to 1 hour working time
- Virtually odour-free
- For indoor or outdoor use
- 3 times stronger than concrete

AVAILABLE PRODUCTS

■ **5499499** 2 Gallon Kit (Base and Activator)

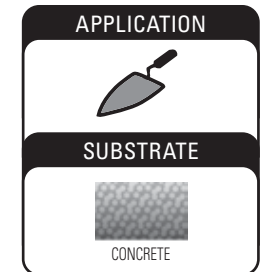

FOR USE ON:

- Interior and exterior concrete
- Spalls and leaks on vertical, horizontal or overhead surfaces
- Also great as an adhesive

TURBOKRETE® ALL-PURPOSE EPOXY REPAIR

The ultimate 100% solids non-sag epoxy repair.


- Easy-to-use — convenient 2K cartridge
- Superior non-sag formula excellent for bridging horizontal or vertical cracks, even under water
- Twice as strong as concrete
- Works on concrete, masonry, brick, steel and more
- Low odour, low VOC
- For indoor or outdoor use

CARTRIDGE (9 oz.)

■ **257395** Light Grey

COMPANION PRODUCTS

- **257397** Replacement Static Mixers (pack of 3)
- **261292** Heavy-Duty Caulk Gun

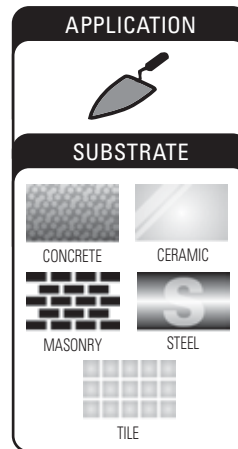

FOR USE ON:

- Interior and exterior horizontal concrete cracks
- Spalls and pitting in mild to severe industrial environments
- Warehousing
- Food and beverage
- Manufacturing

INSTAPATCH®


InstaPatch is an ultra rapid curing concrete repair system. Two-component 100% solids polyurea repair compound. Dries fast for quick return to service.

- Low viscosity, rapid-cure rigid patching
- Cures in 15 minutes or less
- Can be poured into cracks or formed into a slurry and trowel applied
- Can be applied down to -20°C (-5°F)
- Low odour

AVAILABLE PRODUCTS

■ **276981** Grey 1 Gallon Kit

■ **284595** Tile Red 1 Gallon Kit

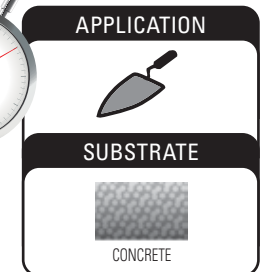

FOR USE ON:

- Control joints, saw cuts and interior expansion joints

FLEXIBLE JOINT SEALANT

High performance two component polyurea designed for floor joints. Self-leveling fast-cure formula with over 80% elongation can withstand 10-15% movement in the floor.

- Cures in 90 minutes
- Can be applied down to -40°C (-40°F)
- For indoor or outdoor use


CARTRIDGE

■ **266733** 22 oz.

■ **261998** 9 oz.

COMPANION PRODUCTS

- **257397** Replacement Static Mixers (pack of 3)
- **261292** Heavy-Duty Caulk Gun for 9 oz.

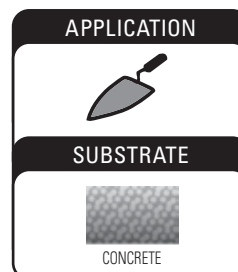

Scan the QR code to view a How to Apply Concrete Saver Flexible Joint video



FOR USE ON:

- Driveways
- Walkways
- Stairs
- Walls


PUTTY PATCH™

Putty Patch™ is a fast-setting general purpose cement-based patching material. A proprietary blend of Portland cements, aggregates and additives that achieves initial set in 10-15 minutes and final set in 20-25 minutes.

- Can be moulded, shaped and shaved
- Stronger than concrete
- Easy-to-use; well suited for interior or exterior applications
- Ideal for vertical and overhead repairs
- Repairs concrete cracks and holes up to 18 cm (7") deep in one application

AVAILABLE PRODUCTS

■ **291995** Grey 3 lb. pkg.

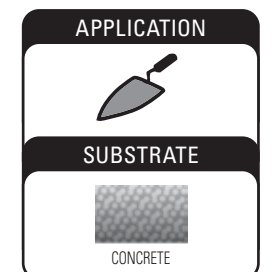



FOR USE ON:
• Concrete


POURABLE CONCRETE PATCHING COMPOUND

Makes repairing large holes and spalls easier than ever before. It has a fibre reinforced, easy-to-mix, pourable material for quick repairs to level concrete surfaces.

- Just add to water, mix and pour
- Fast-drying — Foot traffic in 30 minutes and vehicle traffic in 2 hours
- Sets at low temperatures (down to 4°C [40°F])
- Can be applied from feather edge up to 4 inches in a single application
- Suitable for interior and exterior applications
- Odourless, non-toxic, non-hazardous formula

AVAILABLE PRODUCTS

■ 291070 Grey (18.9 L)

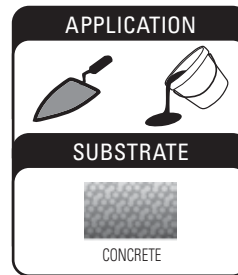

Scan the QR code to view a How to Repair Concrete Holes video



FOR USE ON:
• Unfinished concrete floors


108 CLEANING & ETCHING SOLUTION

Dual action solution — cleans and etches.

- Helps dissolve grease, dirt and oil; then etches concrete for improved coating adhesion
- Covers approximately 400 sq. ft. of concrete with just one pre-mixed, ready-to-use gallon

AVAILABLE PRODUCTS

■ 108402 Cleaning & Etching Solution

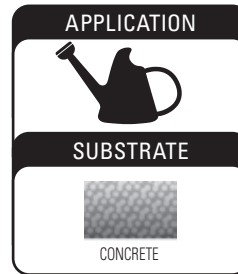

Covers: 37.6 m²
(400 ft²) per 3.78 L





- FOR USE ON:**
- Concrete floors
 - Moisture laden slabs
 - Damp concrete

WATER-BASED TOPSIDE VAPOUR BARRIER

- Water-based TVB is a two-component epoxy primer for concrete floors.
- Excellent adhesion to moisture laden slabs and can be used to remedy concrete floors with high moisture levels before the application of the finish coating
 - Water-based TVB is pH resistant and capable of holding back up to 12 lbs. of MVT (Moisture Vapour Transmission) with a two coat application
 - TVB Water-based Topside Vapour Barrier can be applied to damp or green concrete

This is a two-component system. Order base and activator separately.

WATER-BASED

277494 Part A Resin (54 fl oz in a one gallon container)

278268 Part B Activator (74 fl oz in a one gallon pail)

Water-Based Covers: 250 sq. ft./gal



- FOR USE ON:**
- Concrete floors
 - Moisture laden slabs
 - Damp concrete

100% SOLIDS TOPSIDE VAPOUR BARRIER

TVB 100% Solids Topside Vapor Barrier is a two component, 100% solids epoxy primer for concrete floors designed for floors with the most severe MVT (Moisture Vapor Transmission) problems.

- Excellent adhesion to moisture laden slabs and can be used to remedy concrete floors with high moisture levels before the application of the finish coating
- pH resistant and capable of holding back up to 25 lbs. of MVT in a single application*
- Use under coatings, wood flooring, carpeting or anywhere there is a MVT problem

**Must be applied over a properly prepared shot blasted floor*

This is a two-component system. Order base and activator separately.

100% SOLIDS

278269 Base (3 gallons in a 5 gallon pail)

277500 Activator (2-1 gallon pouches in a carton)



100% Solids Covers: 80-100 sq. ft./gal

CONCRETE PREP, PATCH & REPAIR TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				COVERAGE				DRY TIME HRS. AT 21°C (70°F)- 27°C (80°F) & 50% HUMIDITY			THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F)- 27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (°C/°F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (°C/°F)	APPLICATION TEMPERATURE RANGE		
	WET		DRY		PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY								AIR-ATOMIZED SPRAY	
	MILS	MICRONS	MILS	MICRONS	ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l															
	PERCENT VOLUME SOLIDS	PRACTICAL		THEORETICAL		TACK-FREE		HANDLE		RECOAT		TRAFFIC		BRUSH / ROLLER								AIRLESS SPRAY	
TurboKrete Concrete Patching Compound	—	—	—	—	100	.15-30 cu. ft.	—	—	—	—	2-4	15-8	—	—	—	160402	—	½	—	N/A	85°C 185°F	7-32°C 45-90°F	
TurboKrete All-Purpose Epoxy Repair	—	—	—	—	—	*	—	—	—	2	—	2	2	—	—	—	1:1	—	—	—	—	—	
Flexible Joint Sealant	—	—	—	—	—	**	—	—	—	45 min	—	90 min	90 min	—	—	—	1:1	—	—	—	—	—	
5499 System – Concrete Patching Compound	—	—	—	—	94	12.5	.3	—	—	2-3	—	16	16-72	—	—	—	160402	1:1	5/6	60°C 140°F	N/A	60°C 140°F	10-38°C 50-100°F
InstaPatch® Concrete Repair System	—	—	—	—	—	230 lin. ft.	—	—	—	5 min	—	—	30 min	—	—	—	—	—	—	—	—	—	
108 Cleaning & Etching Solution	—	—	—	—	—	400	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
100% Solids – Topside Vapour Barrier	16	400	16	400	100	80-100	—	—	—	—	—	12-14	—	—	—	—	—	3:2	20-30 min	—	0	—	10-38°C 50-100°F
Water-Based – Topside Vapour Barrier	6.4	160	—	—	50	250	—	—	—	—	—	5-8	—	—	—	—	—	1:1.2	1 hr	—	0	—	15.5-26.6°C 60-80°F

*Practical Coverage - 10.56 linear ft., 1/2" deep x 1/4" wide

**Practical Coverage - 13.3 feet, 1/4" joint x 1" deep

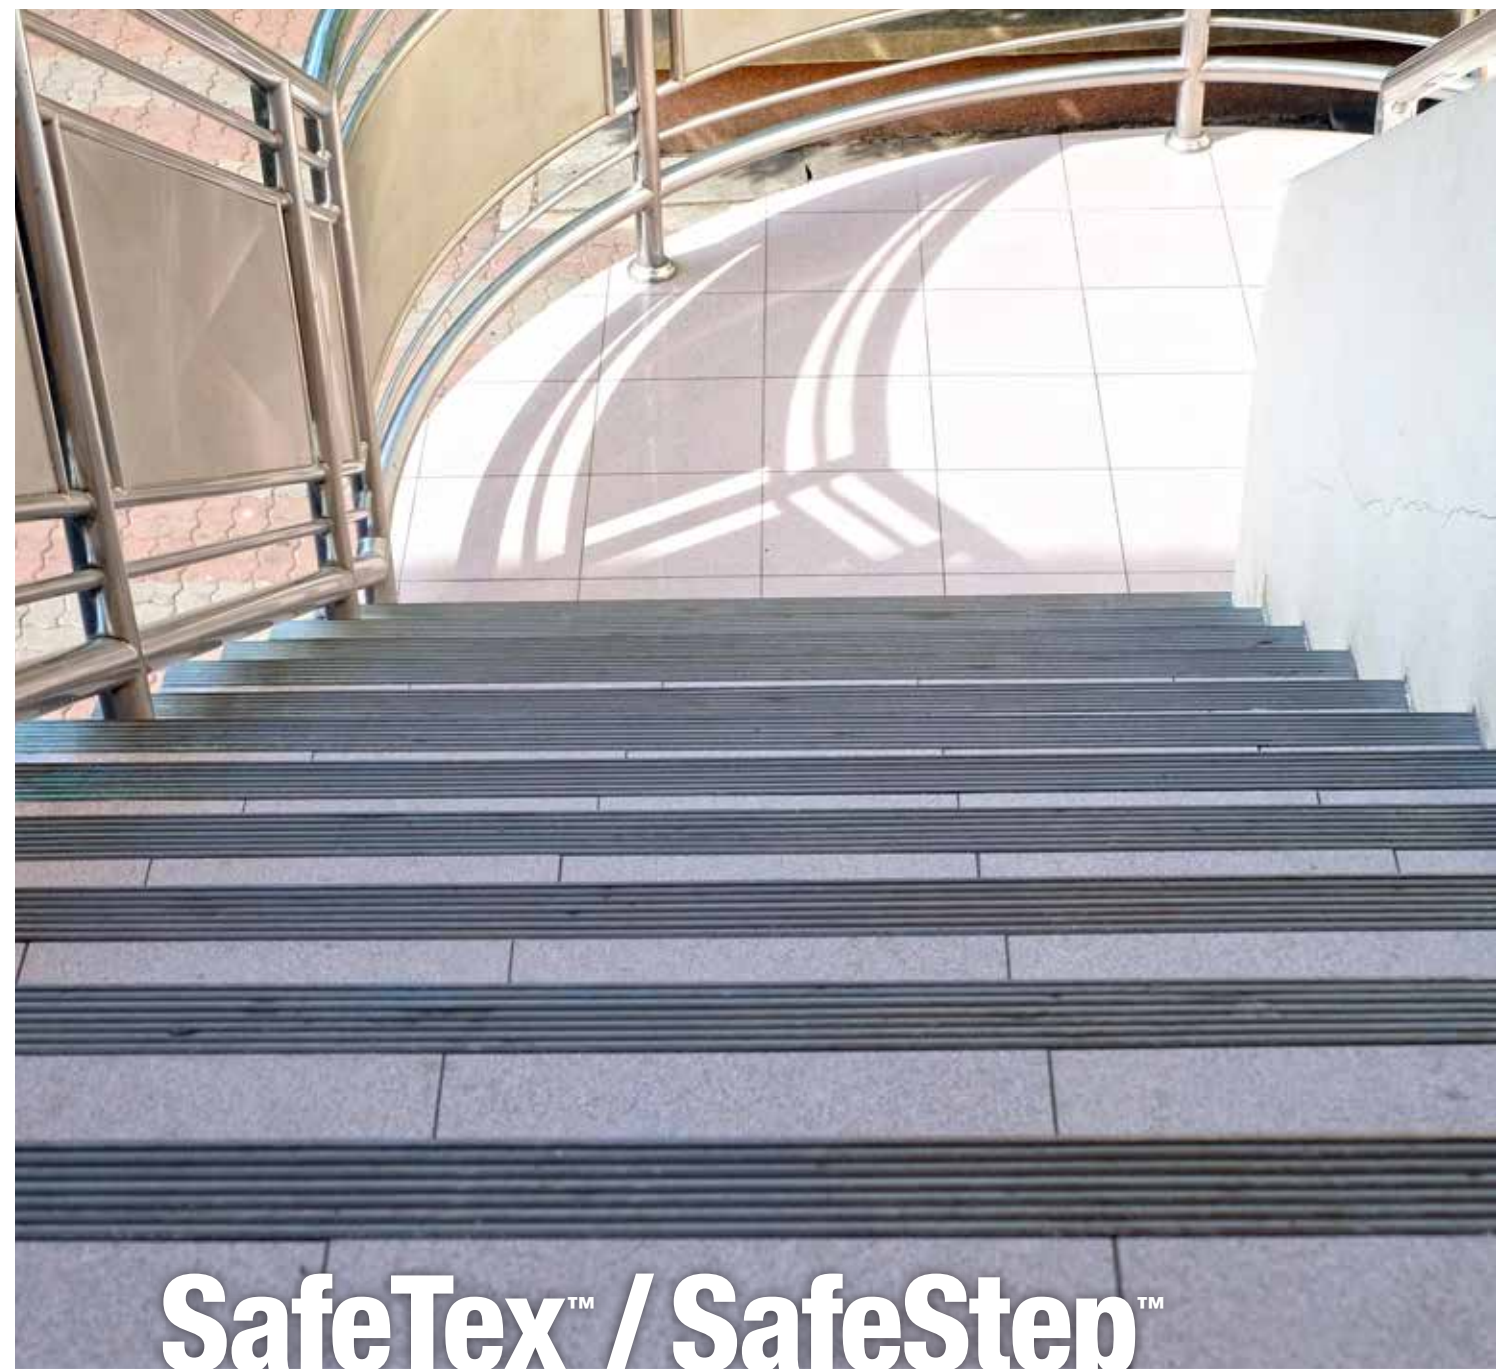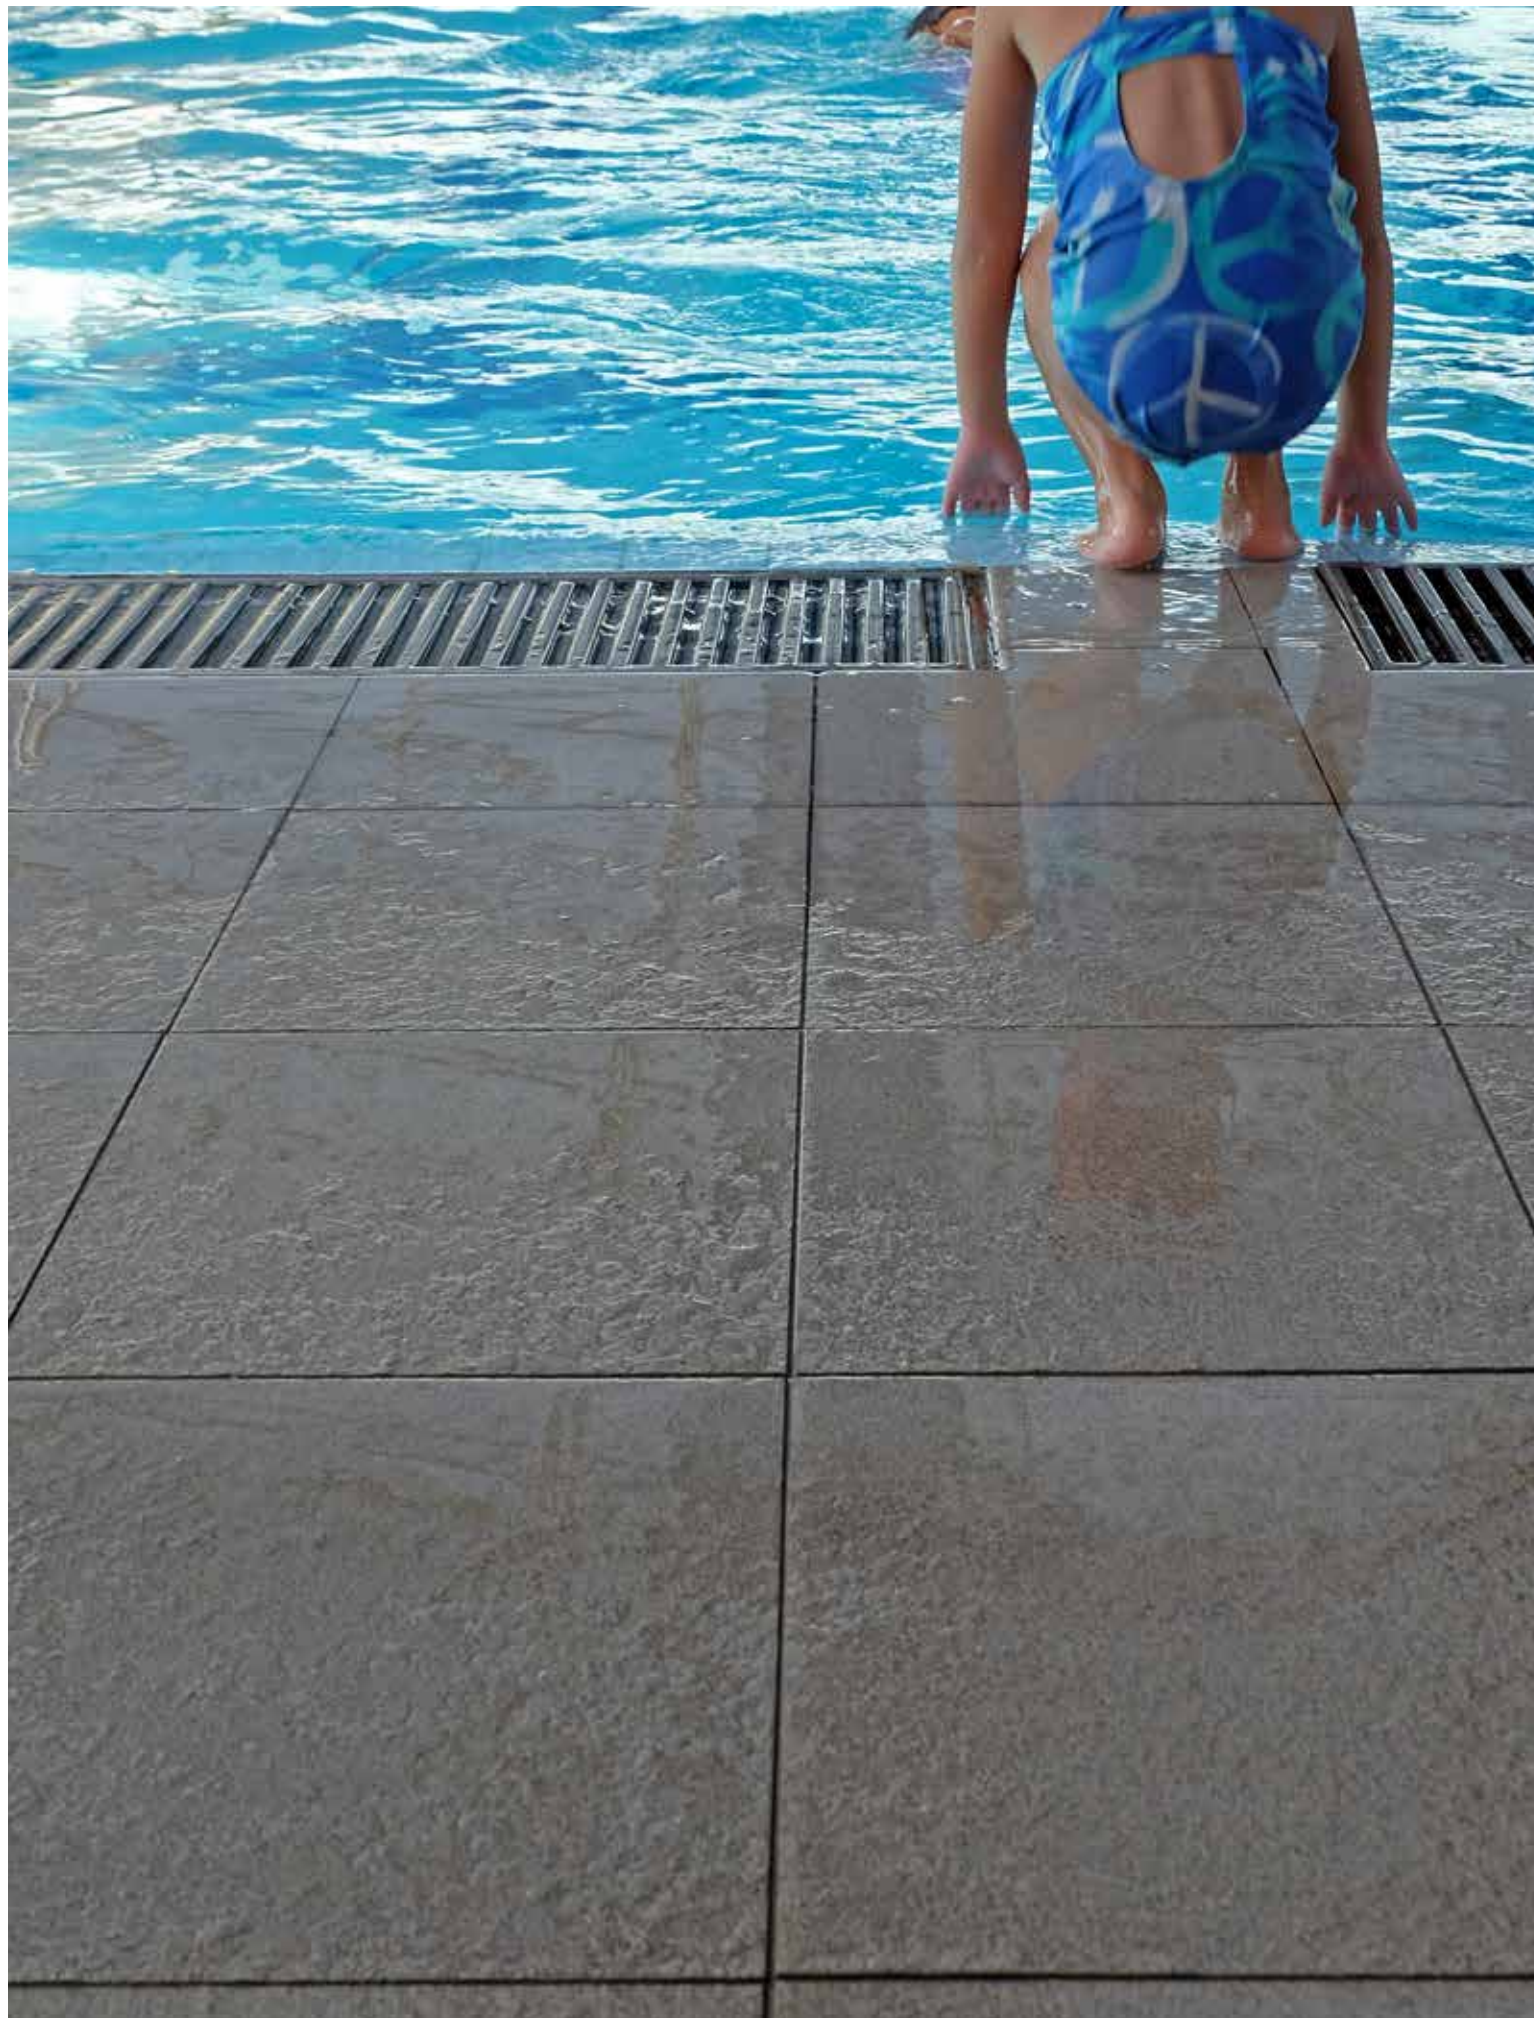

SafeTex™ / SafeStep™

Step up your floor safety, we have the solutions to slick surfaces! SafeStep™ Anti-Slip products create a durable, safe, and slip-resistant surface to both interior and exterior spaces. These easy-to-install products provide an immediate return to service time and are virtually indestructible — ready for whatever traffic comes their way.

SafeTex™ Floor Coatings offer superior anti-slip properties to any concrete floor. Our easy-to-apply formula adds traction and protection to your floors. No matter your needs, SafeTex™ comes in a solution to help keep your facilities, customers and employees safe.




ANTI-SLIP

Preventing slips, trips and falls has never been easier than with Concrete Saver Anti-Slip Floor Coatings. From pedestrian foot traffic in locker rooms to heavy vehicle traffic in warehouses, Concrete Saver products are the easy answer for a safer facility. The coatings are easy to apply with in-house crews and result in a long-lasting durable finish that will protect your floors and the people that walk on them for years to come.



FOR USE ON:

- Interior and exterior concrete floors
- Walkways
- Decks and patios in mild industrial and commercial environments exposed to heavy pedestrian and light rubber wheeled cart traffic

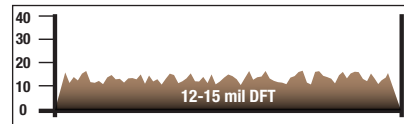

COATING PROFILE

AS5600 SYSTEM ANTI-SLIP FLOOR AND DECK COATING

A fast-drying, tough anti-slip coating to brighten up your floors.

- **Ready-to-use with no messy measuring or mixing**
- Acrylic formula provides a flexible, low to medium profile, excellent for concrete, asphalt, wood or metal
- Low odour: can be applied during work hours
- Fast-drying: can accept foot traffic in as little as 4 hours
- Coefficient of Friction — Dry 1.30, Wet 0.90

COLOURS

- 261175 Safety Yellow
- 261176 Black
- 261177 Navy Grey



Scan the QR code to view a How to Apply SafeTex™ Anti-Slip Floor & Deck Coating to Concrete Stairs video

APPLICATION

SUBSTRATE

CONCRETE STEEL

WOOD

VOC g/l

VOC <100


COMPLIANT NATIONWIDE

Covers: 5.5-6.5 m²
(60-70 ft²) per 3.78 L



FOR USE ON:

- Aisles, decks and walkways
- Stairs and machine operating areas
- Entrances and exits

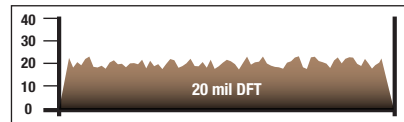

COATING PROFILE

AS5400 SYSTEM ANTI-SLIP ONE-STEP EPOXY

Labour-saving, anti-slip epoxy protects pedestrian grade floors in one step.

- **Easy-to-use, single component for fast application**
- Ridged profile handles heavy foot traffic and/or light vehicle traffic
- Can be resealed for multi-use areas subjected to mild chemicals, occasional steam and chemical cleaning
- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for heavy traffic
- Coefficient of friction — Dry: 1.17, Wet: 1.00

COLOURS

- AS5471402 Dunes Tan
- AS5468402 Tile Red
- AS5486402 Navy Grey
- AS5482402 Silver Grey
- AS5479402 Black

SAFETY COLOURS

- AS5444402 Safety Yellow

*Some colours available in 5 gallons

APPLICATION

SUBSTRATE

STEEL† CONCRETE

WOOD

VOC g/l

VOC <340

Covers: 4.6 m²
(50 ft²) per 3.78 L


† When primed with 9100 System — DTM Epoxy Mastic

ANTI-SLIP



FOR USE ON:

- Barefoot recreational areas
- Locker rooms, hotel pools and restrooms
- Showers, laundries and walkways

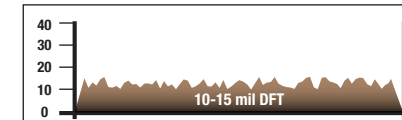

COATING PROFILE

AS6000 SYSTEM ANTI-SLIP LOW PROFILE EPOXY

Low VOC, two-component water-based anti-slip floor epoxy acts as a safeguard on barefoot grade floors.

- **Use anywhere extra protection is needed from slips and falls in barefoot and wet recreational environments**

- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for light traffic/ 48 hr. heavy traffic
- Coefficient of friction — Dry: 0.78, Wet: 0.86

Available in two-component (1 gallon activated) kit of base and activator.

COLOURS

- AS6086425 Navy Grey
- AS6082425 Silver Grey

APPLICATION

SUBSTRATE

CONCRETE STEEL

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 7.4-9.2 m²
(80-100 ft²) per 3.78 L



FOR USE ON:

- Floor coating for vehicle routes
- Forklift traffic and ramps
- Walkways and loading docks



COATING PROFILE

AS9100 SYSTEM ANTI-SLIP HIGH PERFORMANCE EPOXY

Low VOC, two-component extreme profile anti-slip epoxy offers maximum protection for vehicle grade floors.

- **Protects against chemicals and abrasion in heavy traffic environments**

- Highly ridged profile endures heavy wear, frequent power cleaning and constant high humidity
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/ 72 hr. heavy traffic
- Coefficient of friction — Dry: 1.05, Wet: 1.05

Available in two-component (1 gallon activated) kit of base and activator.

COLOURS

- AS9171425 Dunes Tan
- AS9168425 Tile Red
- AS9186425 Navy Grey
- AS9182425 Silver Grey

SAFETY COLOURS

- AS9144425 Safety Yellow

APPLICATION

SUBSTRATE

CONCRETE STEEL†

VOC g/l

VOC <250

Covers: 3.7-5.5 m²
(40-60 ft²) per 3.78 L

† When primed with 9100 System — DTM Epoxy Mastic




Scan the QR code to view a how SafeTex™ Anti-Slip Concrete Floor Coating Improves Safety video

ANTI-SLIP



FOR USE ON:

- Floor coating for food processing
- Preparation areas and wash areas
- Where regular power cleaning and high humidity is common

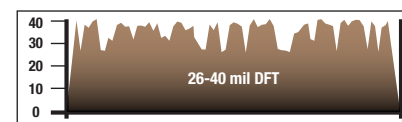

COATING PROFILE

AS6500 SYSTEM ANTI-SLIP 100% SOLIDS EPOXY

Extra heavy-duty, two-component 100% solids epoxy maintains the anti-slip, chemical and abrasion resistance required in food processing where regular power cleaning and high humidity is common.

- **Protects against chemicals and abrasion in heavy traffic environments**
- Low odour ideal for use in confined, low ventilation areas
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/ 72 hr. heavy traffic
- Coefficient of friction — Dry: 1.1, Wet: 1.0

Available in two-component kit of base and activator.


COLOURS

- AS6586425 Navy Grey
- AS6582425 Silver Grey

APPLICATION



SUBSTRATE




VOC g/l

VOC <100


**COMPLIANT
NATIONWIDE**

Covers: 2.3-3.2 m²
(25-35 ft²) per 3.78 L

† When primed with 9100 System
— DTM Epoxy Mastic

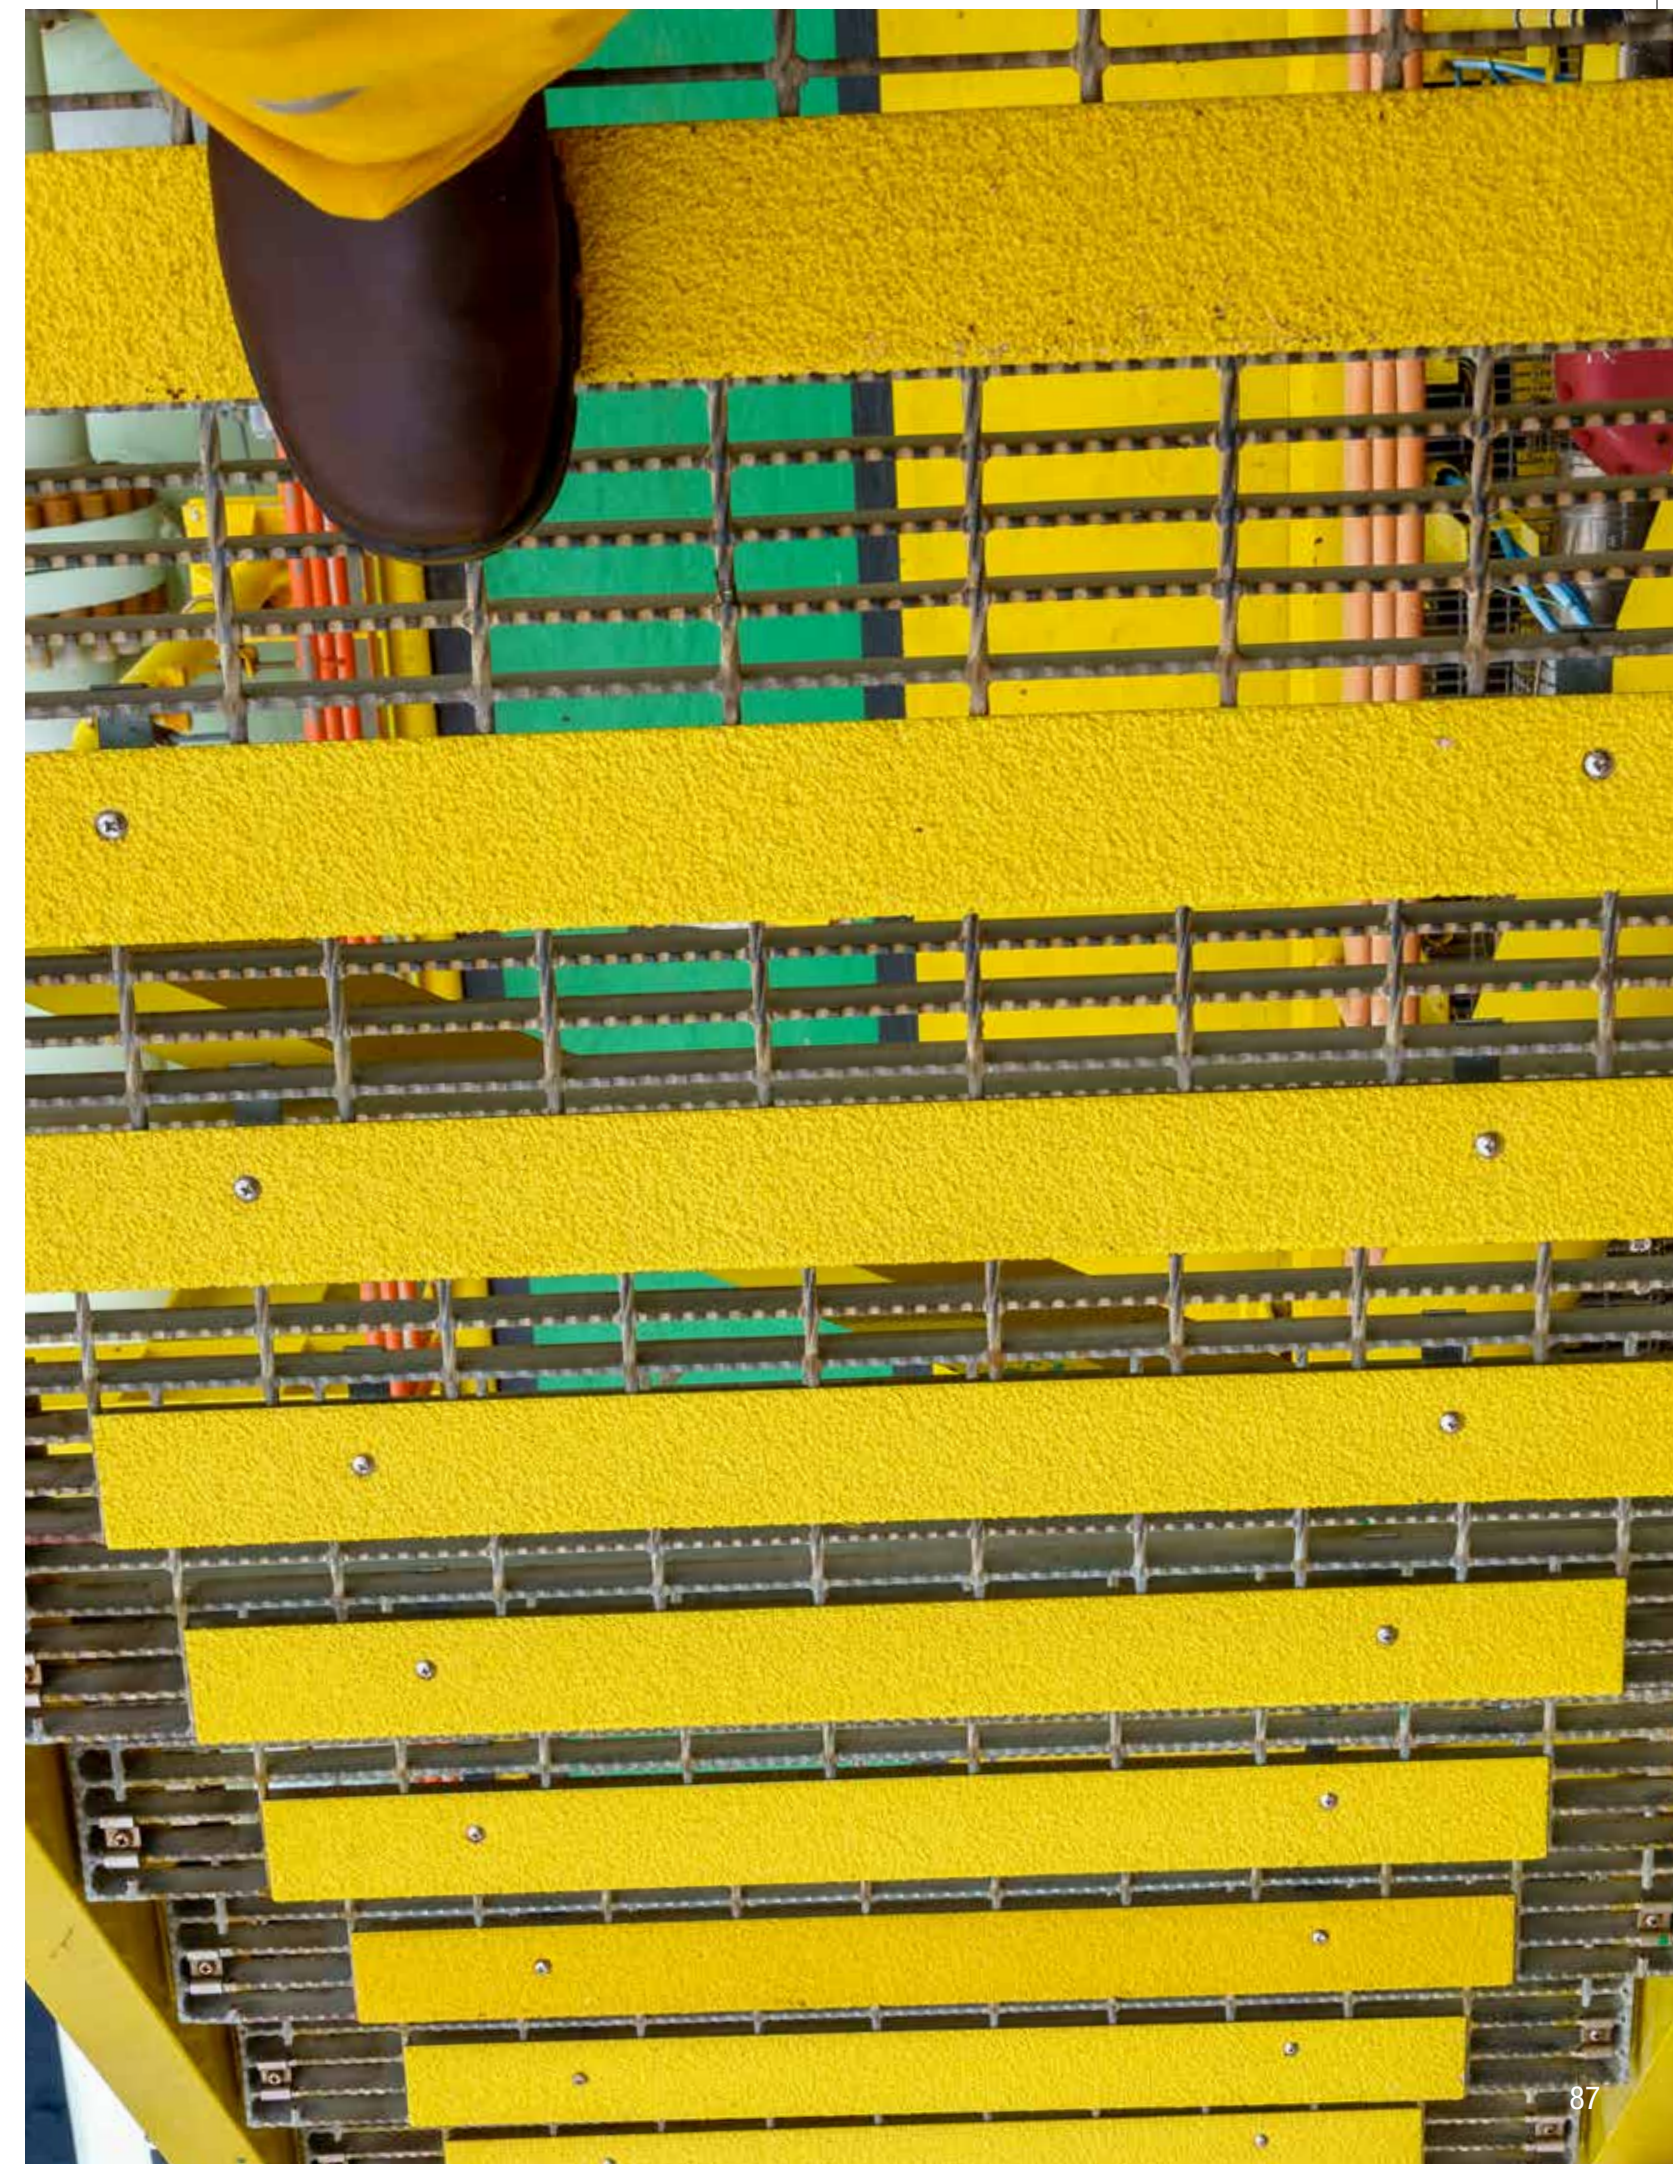

FIBERGLASS REINFORCED PLASTIC

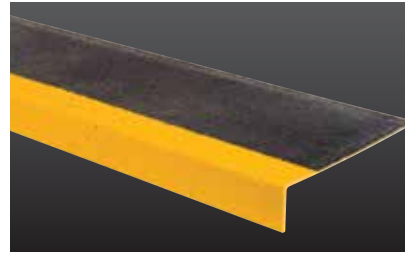**FOR USE ON:**

- Interior/exterior concrete, metal or wood stairs

SAFESTEP™ STEP COVERS

Heavy duty preformed anti-slip step covers provide a corrosion resistant surface for damaged, worn or slippery steps. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):


■	271792	32" x 10"	Black/Yellow	Coarse Grit
■	271795	36" x 10"	Black/Yellow	Coarse Grit
■	271796	48" x 10"	Black/Yellow	Coarse Grit
■	271797	59" x 10"	Black/Yellow	Coarse Grit
■	271798	32" x 13.5"	Black/Yellow	Coarse Grit
■	271799	36" x 13.5"	Black/Yellow	Coarse Grit
■	271800	48" x 13.5"	Black/Yellow	Coarse Grit
■	271801	59" x 13.5"	Black/Yellow	Coarse Grit
■	292460	32" x 10"	Black/Yellow	Medium Grit
■	292461	36" x 10"	Black/Yellow	Medium Grit



Scan the QR code to view a how to Install SafeStep™
Fiberglass Reinforced Plastic Step Covers video



FIBERGLASS REINFORCED PLASTIC

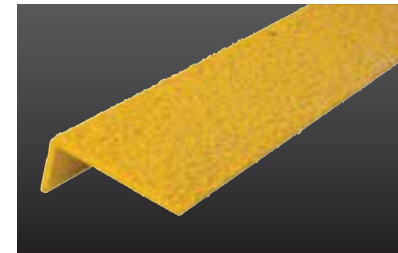**FOR USE ON:**

- Interior/exterior concrete, metal or wood stairs

SAFESTEP™ STEP EDGE

Heavy-duty, high visibility, slip-resistant step edges. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):

■	271818	32" x 2.75" x 1.25"	Yellow	Coarse Grit
■	271819	36" x 2.75" x 1.25"	Yellow	Coarse Grit
■	271820	48" x 2.75" x 1.25"	Yellow	Coarse Grit
■	271821	59" x 2.75" x 1.25"	Yellow	Coarse Grit
■	292482	32" x 2.75" x 1.25"	Yellow	Medium Grit
■	292483	36" x 2.75" x 1.25"	Yellow	Medium Grit
■	292484	48" x 2.75" x 1.25"	Yellow	Medium Grit

SAFESTEP™ SHEETING

Heavy-duty sheets with a tough anti-slip surface. Highly versatile and long-lasting fibreglass sheets for ramps, walkways, etc. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):

■	271810	47" x 47"	Black	Coarse Grit
■	271811	47" x 47"	Safety Yellow	Coarse Grit
■	271814	47" x 96"	Safety Yellow	Coarse Grit
■	271815	47" x 96"	Gray	Coarse Grit
■	271813	47" x 96"	Black	Medium Grit

AVAILABLE SIZES (width & depth):

Landing Cover

■	271816	47.25" x 47.25"	Black/Yellow	Coarse Grit
---	--------	-----------------	--------------	-------------



Floor Coatings

Rust-Oleum's diverse product offering provides a cost effective, durable solution for every industry and every environment. Our range of products include Concrete Saver and Sierra Performance brands for application using in-house crews, to Concrete Protection Systems coatings and toppings for professional contractors. Whatever the floor coating project, Rust-Oleum has the right solution for you.



Scan the QR code to view a how to Coat an Industrial Concrete Floor video



FOR USE ON:

- Interior concrete or tile floors in mild to moderate industrial and commercial environments

HARD SURFACE PRIMER

Hard Surface Primer is a two component, water-based epoxy primer designed to improve the adhesion of paints and coatings to difficult substrates.

- Minimal prep for hard to coat surfaces like; sealed and hard troweled concrete, VCT and ceramic tile
- Add longevity to line striping
- Topcoat window (8 hours to 7 days without sanding)
- Zero VOC
- Compatible with most Rust-Oleum coatings

AVAILABLE PRODUCTS

313973 120 fl. oz. kit

APPLICATION

SUBSTRATE

CONCRETE

Covers: 23.2-32.5 m²
(250-350 ft²) per 3.78 L



FOR USE ON:

- User friendly coating that can be used on horizontal and vertical surfaces

5800 SYSTEM WATER-BASED URETHANE

5800 Water-Based Urethane is a two component, highly versatile coating that can be used on horizontal and vertical surfaces. This product can be used on multiple surfaces including concrete, wood, aluminum, prepared drywall and galvanized metal. Recommended for interior and exterior environments including: cafeterias, clean rooms, healthcare, manufacturing and warehouses. This product also has anti-graffiti barrier coat properties.

- User friendly - Easy to mix two component system with a 60 minute pot life
- Excellent chemical, abrasion and UV resistance
- Non-yellowing: colours are available in a gloss finish, clear is available in gloss and matte finishes
- VOC compliant nationwide

COLOURS

- **353866** Navy Grey
- **353867** Dunes Tan
- **353958** Tile Red
- **353960** White
- **353961** Clear Gloss
- **353962** Clear Matte

SAFETY COLOURS

- **353865** Safety Yellow
- **353959** Safety Green
- **359913** Safety Red
- **359912** Safety Blue

APPLICATION

SUBSTRATE

WOOD CONCRETE
ALUMINUM GALVANIZED
DRYWALL

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 27.9-46.5 m²
(300-500 ft²) per 3.78 L.
Coverage rate can vary depending on the texture and porosity of the concrete.



FOR USE ON:

- Interior and exterior concrete floors
- Walkways
- Decks and patios in mild industrial and commercial environments exposed to heavy and light rubber wheeled traffic

5600 SYSTEM ACRYLIC URETHANE FLOOR PAINT

Spruce up your floor with low odour, roll and go floor paint.

- Protects concrete floors from dusting, water damage and staining
- Provides a mildew resistant coating
- Use for improved aesthetics, 5S, safety and organization markings and for easy maintenance
- Convenient, ready-to-use with no measuring or mixing
- Excellent coverage over new and previously coated surfaces
- Accepts next day foot traffic

COLOURS

- **261117** Safety Blue
- **261118** Safety Green
- **261116** Safety Orange
- **261115** Safety Red
- **251286** Safety Yellow
- **251289** White
- **251291** Silver Grey

APPLICATION

SUBSTRATE

WOOD CONCRETE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 15.8-37.2 m²
(170-400 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities
- Topcoat in heavy-duty areas

6700 SYSTEM EXTENDED POT LIFE EPOXY

Uses a unique chemistry, that results in a coating with great flexibility, working times and self-leveling properties. This two-component epoxy is applied in one easy step — no primer required. As a result of the low odour, this coating can be applied indoors with minimal disruption.

- 100% solids epoxy that anyone can apply
- 60 minute pot life, 2x longer than standard 100% solids epoxies
- Great self-leveling properties allows for roller application or squeegee/back-roll application
- Low odour, low VOCs; great for new, old, bare or previously coated concrete floors
- Fast return to service- can accept vehicle traffic in 36-48 hours

Base and activator included in two-component kit. The components for the three gallon size are sold separately. Each component is packaged in a short filled 3½ gallon plastic container.

TWO-COMPONENT KIT

- **301675** Silver Grey
- **301676** Dunes Tan
- **301677** Clear
- **301678** Navy Grey
- **301679** Super Light Grey
- **301680** Light Grey

BASE PART A (SOLD SEPARATELY)

- **332241** Silver Grey
- **332245** Dunes Tan
- **332242** Navy Grey
- **332243** Super Light Grey
- **332243** Clear

ACTIVATORS (SOLD SEPARATELY)

- 333691** Part B for colour finishes
- 332248** Part B for clear finish

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <50

Covers: 9.3 m²
(100 ft²) per 3.78 L

FLOOR IN 24



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

**FINISHKOTE 80
HIGH SOLIDS
POLYASPARTIC
FLOOR COATING**



A UV stable, fast dry coating that provides excellent UV, chemical and abrasion resistance in a wide range of temperatures making it an excellent choice for both interior and exterior applications.

- Can be applied by spray or roller at temperatures between -29-49°C (-20-120°F) and in high humidity
- Fast dry coating can be top coated in 4-6 hours
- Provides excellent adhesion to concrete, epoxies, urethanes and polyureas
- Dries to a high gloss, professional finish

AVAILABLE PRODUCTS

- 283567 Part A - 2 Gallon
283616 Part B - 2 Gallon

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 23.2-32.5 m²
(250-350 ft²) per 3.78 L

FLOOR IN 24



FOR USE ON:

- Commercial application
- Restaurant
- Showrooms

**HEAVY METAL
DECORATIVE
FLOOR COATING**



A high gloss, floor coating that uses pearlescent additives for a distinctive iridescent finish perfect for restaurants, showrooms, lobbies or any other space that needs a decorative and durable floor.

- Easy-to-apply with long working time — 45 minute pot life
- Fast dry coating accepts traffic in less than 24 hours
- Durable formula protects against chemicals and abrasion
- Use FastKote Polurea Black as a base coat for a more dramatic effect

AVAILABLE PRODUCTS

- 280952 Part A - 2 Gallon
280954 Part B - 1 Gallon

COLOURS

- 280927 Blue Sky
- 280928 Silver Bullet
- 280929 Copper Pot
- 280926 Earth Brown

APPLICATION


SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 8.3-9.2 m²
(90-100 ft²) per 3.78 L

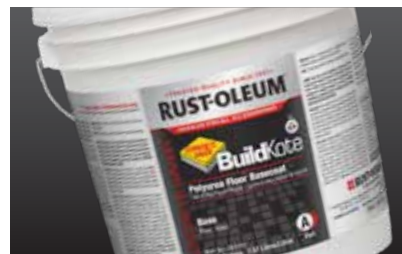

FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

**BUILDKOTE
POLYUREA FLOOR
COATING PRIMER**



Provides exceptional adhesion and withstands a wide range of temperatures and climate conditions. BuildKote has an extended open time making it a great choice for broadcast systems.

- Can be applied by spray or roller at temperatures between -29-49°C (-20-120°F) and in high humidity
- Fast dry coating can be top coated in 2-4 hours
- Provides excellent adhesion to concrete, fiberglass, wood, epoxy, urethanes and polyurethanes
- Can be applied clear or tinted with Polyurea Universal Tints
- Can also be applied to vertical surfaces as a primer or stand-alone coating

AVAILABLE PRODUCTS

- 283193 Part A - 1 Gallon
283191 Part B - 2 Gallon

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 7.4-18.5 m²
(80-200 ft²) per 3.78 L



FOR USE ON:

- Floors in industrial and commercial facilities
- Interior and Exterior Flooring

**FASTKOTE® UV STABLE
POLYUREA FLOOR COATING**

FastKote® UV is a fast-cure polyurea floor coating that fully cures and accepts vehicle traffic in only 24 hours but has added protection against UV rays. The high gloss coating is designed for use in industrial and commercial facilities.

- UV stable, fade resistant formula
- Fast dry coating accepts light traffic in 4-6 hours; full vehicle traffic in 24 hours
- Durable polyurea formula protects against chemicals and abrasion
- Easy roller application

COLOURS

- 277499 Clear
- 278270 Safety Yellow
- 278478 Grey
- 278493 Tan
- 278494 Super Light Grey
- 280971 Black

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <50

Covers: 37.2 m²
(400 ft²) per 3.7 L

COMPANION PRODUCTS



FOR USE IN:
 • Any floor coating with a dry film thickness of 16 mils or less

200 ANTI-SKID FLOOR COATING ADDITIVE

The 200 Anti-Skid Floor Coating Additive is a specially refined aggregate to provide a surface texture to floor coatings and promote skid resistance of the dry coating.

AVAILABLE PRODUCTS

200504 Anti-Skid Floor Coating Additive - 1lb bag



FOR USE IN:
 • Any floor coating with a dry film thickness of 8 mils or less

ULTRAWEAR® ADDITIVE

Rust-Oleum® UltraWear® Additive is a specially refined blend of aluminum oxide to provide improved wear resistance of floor coatings. UltraWear Additive will also add slight surface texture to floor coatings and promote skid resistance of the dry coating.

AVAILABLE PRODUCTS

213898 UltraWear Additive - 1lb bag



FOR USE IN:
 • Any floor coating with a dry film thickness of 4 mils or less

DURABILITY ADDITIVE

Concrete Saver® Durability Additive forms a co-polymer matrix that provides a tough, durable finish with increased protection from marring, scratching and abrasion. This lightweight additive is easy to mix into our coatings and stays in suspension longer than typical stir-in products. It provides a satin-texture that helps hide minor imperfections in the substrate and finish on your floors.

- Lightweight, easy to mix and install
- Will not distort or discolour decorative effects or graphics

AVAILABLE PRODUCTS

280945 Durability Additive

COMPANION PRODUCTS



FOR USE IN:
 • Flooring systems for a decorative finish

DECORATIVE VINYL CHIPS

Add visual appeal to your floor with Rust-Oleum Concrete Saver Decorative Vinyl Chips. When added to an epoxy coating, these small, flat vinyl pieces can transform the look of a floor. Create an effect that ranges from slightly speckled to terrazzo-style.

- Easy to use—sprinkle directly onto the wet epoxy coating, finish with a clear top coat
- Use with the base colour of your choice
- Can be applied liberally or sparsely to vary the look
- Bag includes a blend of solid colour vinyl chips

AVAILABLE PRODUCTS

205220 Black/White
205178 Blue/White
205177 Black/White/Blue
205179 Black/White/Grey

RUST-OLEUM MIXERS & ROLLERS

6695023 Jiffler Mixer
6697005 9" Phenolic "No Nap" Roller Cover

FLOOR COATINGS TECHNICAL DATA

	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 21°C (70°F) - 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F) - 27°C (80°F) & 80% HUMIDITY	DRY HEAT RESISTANCE (C/F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (C/F)	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY							
	MILS	MICRONS	MILS	MICRONS		ft ² /gal.	m ² /l	ft ² /gal.	m ² /l														
5600 System— Acrylic Urethane Floor Paint	5-8	125-200	15-20	375-50	25-30	170-400	4.2-6.6	400-480	9.8-11.8	1-2	—	4-6	24	—	—	—	Soap/ Water	—	—	—	<100	>93°C (200°F)	10-32°C (50-90°F)
S60 Water-Based Epoxy Floor Coating	7-10	175-250	3.5-5	87.5-125	50	135-195	3.3-4.8	800	19.7	30 min.	—	1-2	24	Water	Water	Water	Soap/ Water	2:1	2	—	0	>93°C (200°F)	10-32°C (50-90°F)
9100 System DTM Epoxy Mastic (with 9101402 Activator)	6.5-10.5	162.5-262.5	5-8	125-200	78-81	125-225	3.1-5.5	1250-1300	30.8-32.0	6-8	6-12	16-72	—	—	—	160402 10%	160402	1:1 70°F	2-41	149°C (300°F)	<340	43°C (110°F)	10-38°C (50-100°F)
AS5600 System— Floor and Deck Coating	20-23	500-575	12-15	300-375	62-64	60-70	1.5-1.7	—	—	—	—	—	24	—	—	—	Soap/ Water	—	—	—	<50	>93°C (200°F)	10-38°C (50-100°F)
AS5400 System— 1-Step Epoxy Floor Coating	30-35	750-875	17-20	425-500	60-62	50	1.23	—	—	—	—	12	24	—	—	—	160402	—	—	—	<340	27°C (81°F)	10-38°C (50-100°F)
AS6000 System— Low Profile Epoxy Floor Coating	16-20	400-500	10-15	250-375	65-75	80-100	1.9-2.4	—	—	—	—	—	48	—	—	—	Soap/ Water	3:7:1 AS60	1	—	<70	>93°C (200°F)	10-38°C (50-100°F)
AS9100 System— High Performance Epoxy Floor Coating	27-40	675-1000	17-25	425-625	62	40-60	1-1.5	—	—	—	—	—	72	—	—	—	160402	9:6:1 AS91	4	—	<250	27°C (81°F)	10-38°C (50-100°F)
AS6500 System— 100% Solids Epoxy Floor Coating	27-40	675-1000	26-40	650-1000	96-100	25-35	0.6-0.9	—	—	—	—	—	48	—	—	—	160402	4:1:1 AS65	1	—	<30	>93°C (200°F)	10-38°C (50-100°F)
6700 System— Extended Pot Life Epoxy	16	406.4	16	406.4	100	100	9.29	—	—	—	—	—	12-48	36-48	—	—	Acetone	2:1 colours/ 5:3 clear	1	—	<113	>94°C (201°F)	16-32°C (60-90°F)



Roofing

Rust-Oleum LeakSeal has innovated quality products that repair and beautify commercial and residential spaces. Rust-Oleum LeakSeal is proud to introduce its new roofing program complete with Roof Coatings, Patch & Repair, and Cleaners for commercial and residential roofs.

Use on low and steep slope roofs, including commercial and residential properties, RVs, campers, porch awnings, barns, sheds & more.



PRIMER

**FOR USE ON:**

- New and aged asphaltic or single ply membranes

LEAKSEAL® WATER-BASED PRIMER

Rust-Oleum LeakSeal Water-Based Primer is a polymer modified primer that conditions a variety of roofing substrates prior to application of Rust-Oleum LeakSeal Elastomeric Roof Coating systems.

- **Multi-surface primer**
- Quick drying
- Environmentally safe
- Low VOC
- Promotes adhesion for coating systems to new and aged asphaltic or single ply membranes

AVAILABLE PRODUCTS

322051 3.78 L

APPLICATION



REPAIR

**FOR USE ON:**

- Cold, hot, wet, dry, or underwater surfaces
- New asphalt ply and mod-bit membranes, vents, shingles, skylights and chimneys

LEAKSEAL® ULTIMATE WET PATCH

Rust-Oleum LeakSeal Rubberized Wet Patch is a premium quality, heavily fibered, asphalt-based, roof cement blended with penetrating oils and plasticizing agents that can be applied directly to cold, hot, wet, dry or underwater surfaces. Rubberized Wet Patch can be used to repair and restore flashings and roofing defects such as blisters, cracks, and punctures. It can also be used to adhere new asphalt ply, and modified bitumen membrane flashings or seal vents, shingles, skylights, and chimneys. Rubberized Wet Patch resists sags and spreads very easily in cold conditions.

- **Superior adhesion**
- All-weather repairs
- Heavily fibered and flexible to resist cracking
- Sag resistant

AVAILABLE PRODUCTS

322022 11.4 L

322050 3.78 L

322032 300 mL

APPLICATION

**FOR USE ON:**

- Flat or slope roofs

LEAKSEAL® CLEAR ROOF PATCH

Rust-Oleum LeakSeal Clear Roof Patch provides a quick, durable waterproofing seal that is easy to apply. It can be used as a stand alone sealant or in conjunction with coating systems.

- **One-part thermoplastic elastomer**
- High performance
- Flexible seal
- Fast skinning fast cure through

AVAILABLE PRODUCTS

322045 3.78 L

322028 946 mL

322031 300 mL

APPLICATION



REPAIR

**FOR USE ON:**

- Roofs
- Skylights
- Flashings
- Chimneys

LEAKSEAL® ROOF REPAIR PLASTIC ROOF CEMENT

Rust-Oleum LeakSeal Plastic Roof Cement is a fibered, asphalt based cement used to install, repair, or rebuild roof flashings at parapet walls, gravel stops, stacks, vents, monitors and similar applications. It is perfect for use with fiberglass or polyester fabric or roll roofing. Applies fast & smooth without stringing.

- **Applies smooth without stringing**

- Fibered, asphalt based
- Seals crack and splits in dry conditions
- Waterproofs and stops leaks

AVAILABLE PRODUCTS

322034 3.78 L

APPLICATION

**FOR USE ON:**

- General repairs on asphalt and modified bitumen roofs

LEAKSEAL® ROOF REPAIR ALL SEASON

Rust-Oleum LeakSeal Roof Repair All Season is a fibrated, asphalt based mastic formulated with a blend of SBS rubber modifier, penetrating oils, and plasticizing agents.

- **Stops leaks**

- All season application
- SBS Modified
- Adheres to damp surfaces
- Low temperature workability

AVAILABLE PRODUCTS

322133 18.9 L

322132 3.78 L

322130 300 mL

APPLICATION

**FOR USE ON:**

- Metal
- Wood
- Vinyl
- Glass

LEAKSEAL® GUTTER & SIDING SEALANT

LeakSeal Gutter & Siding Sealant is an all season application. Adheres to metal, wood, vinyl and glass.

- **Low temperature workability**

- Versatile
- Stops leaks

AVAILABLE PRODUCTS

338373 300 mL - White

338375 300 mL - Clear

APPLICATION



REPAIR

**FOR USE ON:**

- Flashings
- Seams
- Cracks
- Small holes
- Blisters
- Eavestroughs


LEAKSEAL® ROOF PATCH FABRIC MESH

LeakSeal Roof Patch Fabric Mesh is a fiberglass fabric used to reinforce roof repair jobs such as flashings, seams, cracks, small holes, blisters and eavestroughs.

- Use with LeakSeal Roof Patch to repair cracks, seams, small holes, flashings, blisters and gutters

AVAILABLE PRODUCTS

259957 25 ft. roll

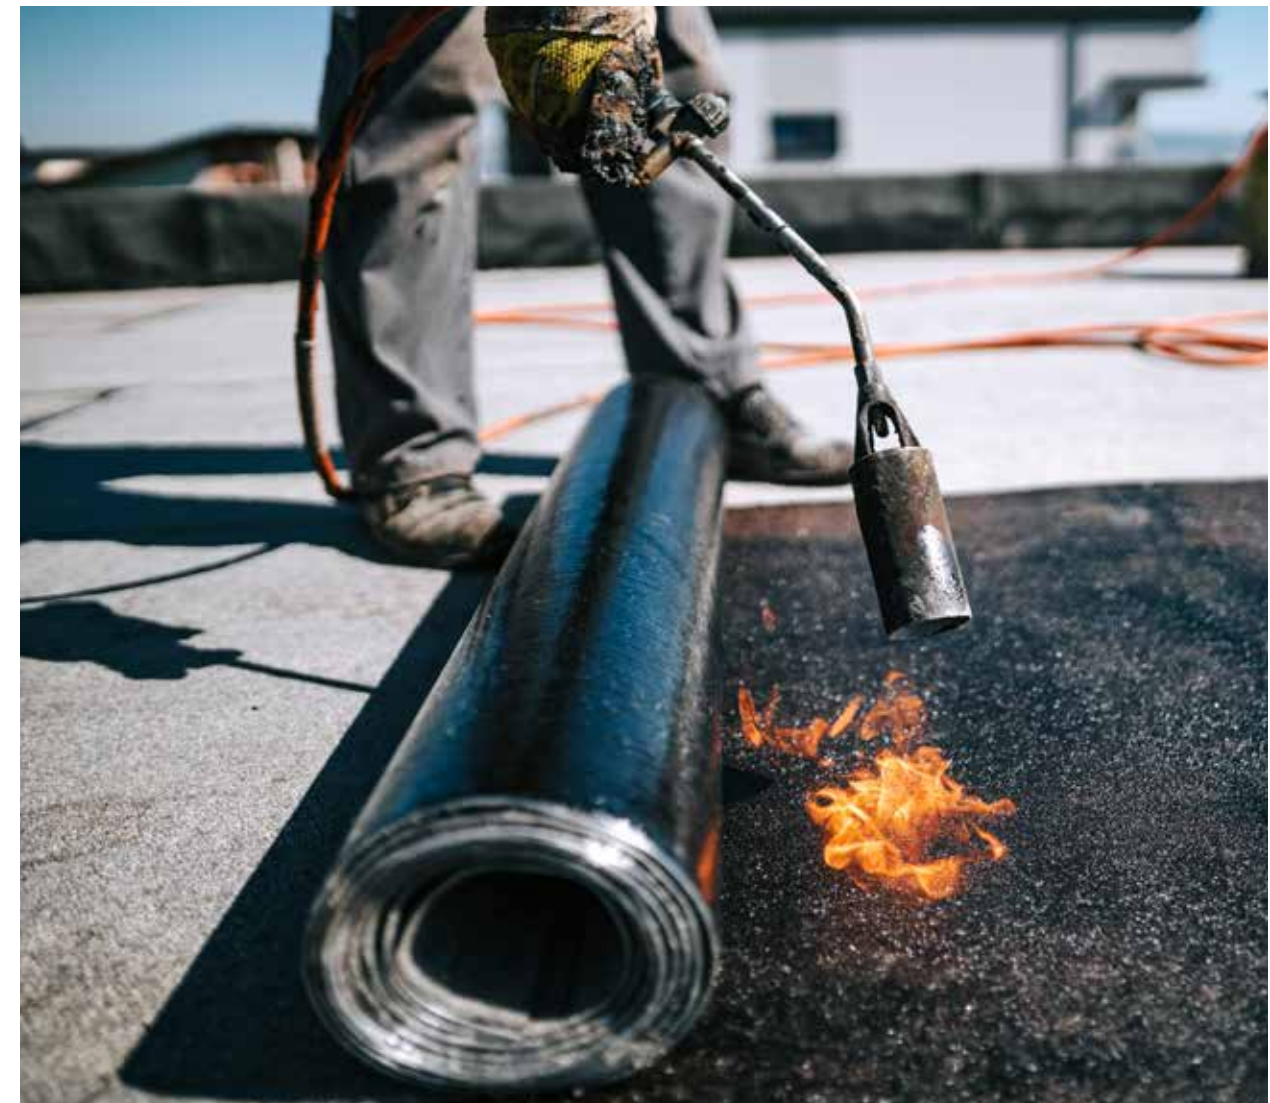

COATING



FOR USE ON:

- Metal roofs
- Sidewalls


LEAKSEAL® ALUMINUM ROOF COATING - 7 YEAR

Rust-Oleum LeakSeal 7 Year Aluminum Roof Coating is a metallic pigmented coating used for rustproofing and weatherproofing metal roofs and sidewalls, and as a reflective coating for built-up roofing and modified bitumen roof systems.

- **50% Reflectivity**
- Energy efficient reflective coating
- 9.7% Metallic flake content
- 2 Coat direct to tight rust — no primer needed
- Prevents rust and waterproofs metal roofs

AVAILABLE PRODUCTS

322079 18.9 L
322068 3.78 L



COATING



FOR USE ON:

- Metal roofs
- Concrete
- Modified bitumen
- Asphalt build up
- Weathered single ply roofing


LEAKSEAL® ELASTOMERIC ROOF COAT - 7 YEAR

Rust-Oleum LeakSeal 7 Year Elastomeric Roof Coating provides a high initial reflectivity value of 67%, energy efficient, long term durability and excellent resistance to weathering and dirt pick-up. This elastomeric roof coating is formulated to meet and/or exceed the standards as established in ASTM D6083. Rust-Oleum LeakSeal 7 Year Elastomeric Roof Coating waterproofs and weatherproofs metal, weathered single ply membranes as well as smooth surface asphalt built-up and modified bitumen roofing substrates.

- **67% Reflectivity**
- Energy efficient reflective coating
- Rain Resistant in 6 hours
- Mildew resistant

AVAILABLE PRODUCTS

322082 18.9 L
322071 3.78 L

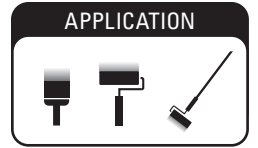

FOR USE ON:

- Asphalt build up
- Modified bitumen


LEAKSEAL® FIBERED ROOF COATING

Rust-Oleum LeakSeal Fibered Black Roof Coating is a high quality cold-process asphalt based roof coating formulated to resist the detrimental effects of the environment.

- **Water proofer**
- Solvent-based
- Extremely flexible, resists splitting and cracking
- Fibered for enhanced durability
- Fast, easy economical installation

AVAILABLE PRODUCTS

322073 3.78 L

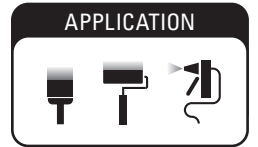

FOR USE ON:

- Asphalt build up
- Modified bitumen
- Damp or green concrete


LEAKSEAL® ROOF AND FOUNDATION COATING

Rust-Oleum LeakSeal Roof and Foundation Coating is a non-fibered asphalt emulsion that can be either spray or roller applied as a high quality primer and thin base coat for use after curing with Rust-Oleum LeakSeal roof coatings, or as a damp proofer on vertical surfaces to protect against moisture penetration in roofing or building applications. This product is used to fill pores and protect against moisture penetration when sprayed or rolled-on.

- **Damp proofer**
- Asphalt emulsion
- Protects and seals roofs and foundation walls
- Spray grade, non-fibered
- Rain resistant in 2 hours

AVAILABLE PRODUCTS

322085 18.9 L
322074 3.78 L

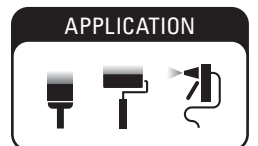

WATERPROOFING



FOR USE ON:

- Exterior wall cavities
- Poured concrete
- Steel
- Wood base substrates

LEAKSEAL® FOUNDATION MEMBRANE


Rust-Oleum LeakSeal 9 inch Foundation Membrane is an impermeable, self-adhered sheet designed to be applied to exterior cavity walls to mitigate air infiltration/exfiltration, vapour transmission and water penetration.

- **Manufactured to a preset, uniform thickness that provides consistent and uniform coverage**
- Rugged HDPE film protects SBS membrane against incidental damage during construction process
- Superior adhesion
- All-weather repairs
- Heavily fibrated and flexible to resist cracking
- Sag resistant
- White facer reduces heat adsorption
- Seals window and door frames

AVAILABLE PRODUCTS

322027 9"



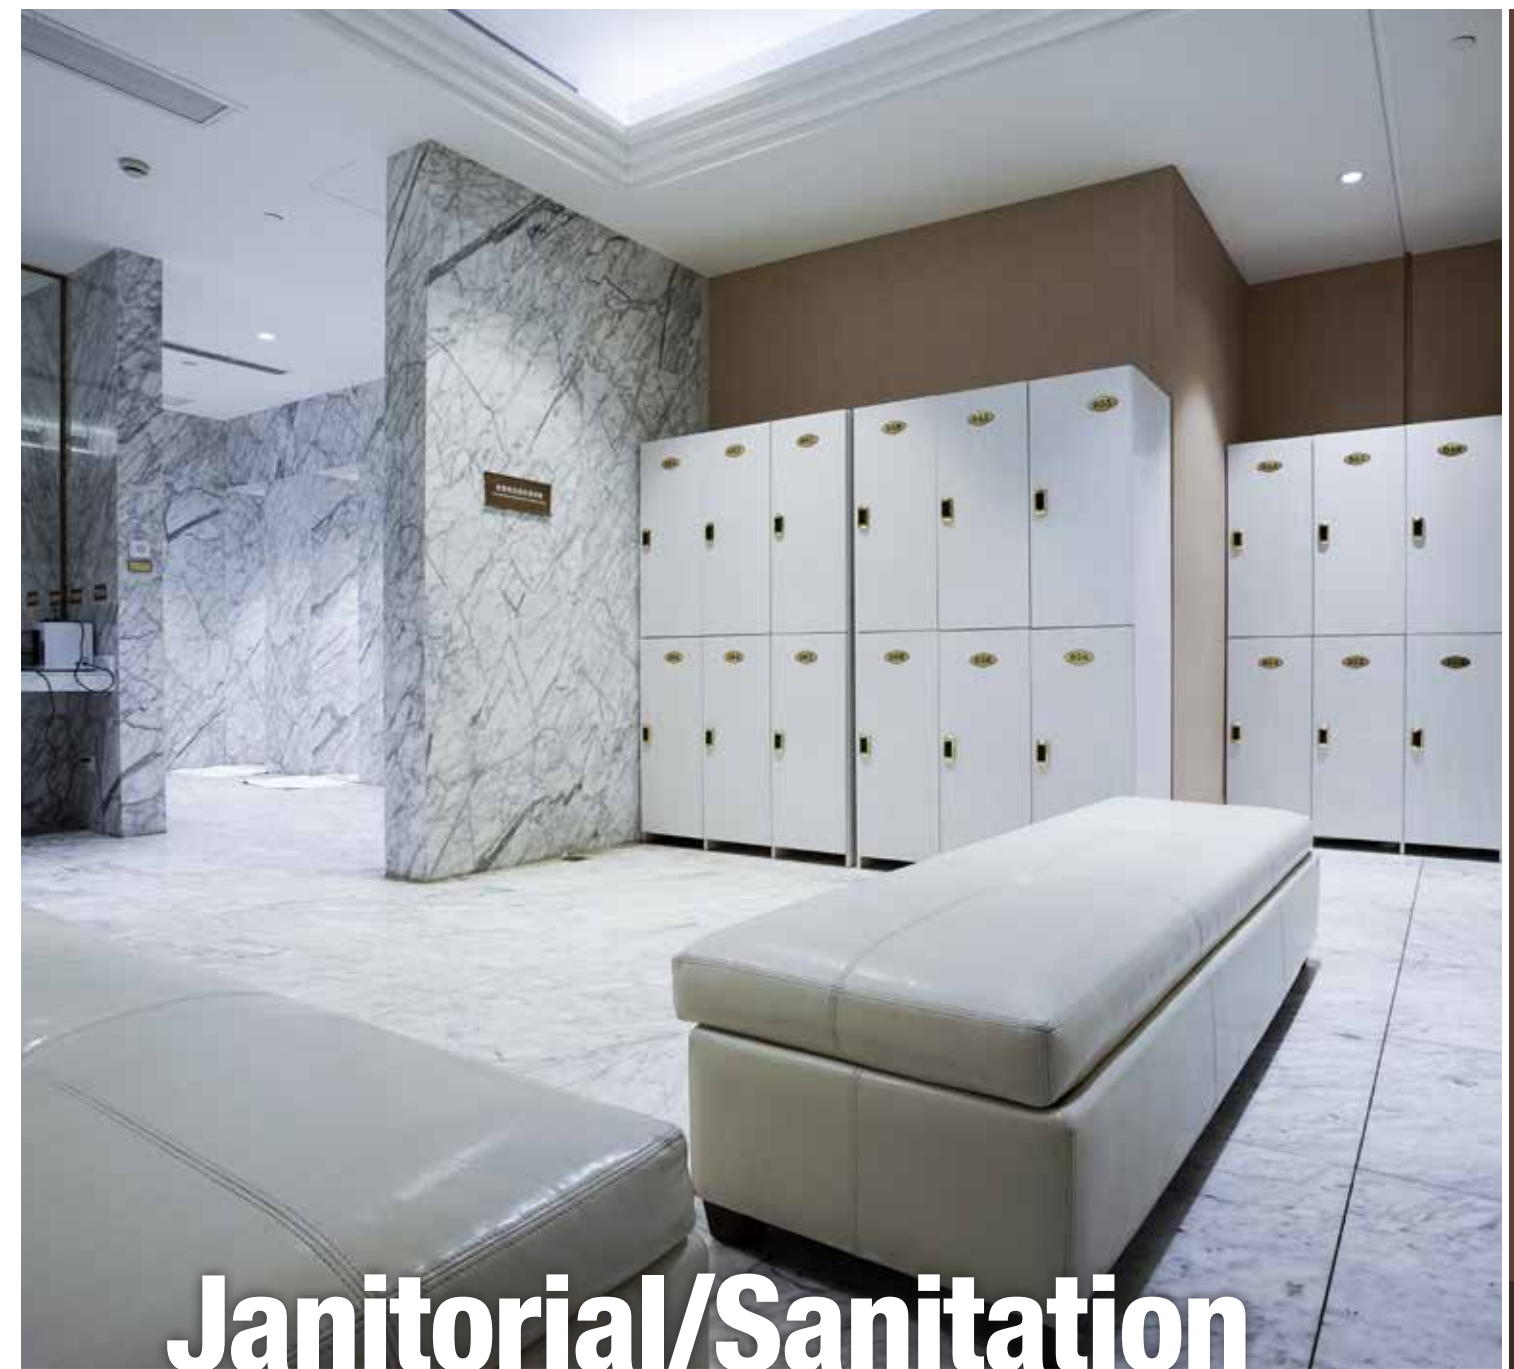

Janitorial/Sanitation

Rust-Oleum manufactures a diverse arsenal of cost-effective and high-performance products for all cleaning needs. The Rust-Oleum product range includes Cleaners and Degreasers, Mould Remediation, Disinfectants, Rust Removers, Drain, Septic and more. Whatever the cleaning challenge, Rust-Oleum has the right solution for your janitorial and sanitation needs.



MOULD REMEDIATION

**FOR USE ON:**

- Hard and fabric surfaces such as drywall, wood, composite wood, plastic, concrete, siding, shingles, metal, brick, stone, tile, grout, stucco, fabric (sports bags, clothing), furniture, upholstery, flooring, rubber (front load washing machine gasket) and many more

CONCROBIUM MOLD CONTROL®

Concrobium Mold Control is a patented solution that effectively kills and prevents mould and mildew, and eliminates musty odours with no bleach or harmful chemicals. The product works as it dries by crushing mould spores at the roots and leaves behind an invisible antimicrobial shield that prevents future mould growth. Use Concrobium Mold Control for mould and mildew clean-up and prevention, general interior maintenance, water damage restoration and during construction/renovation (paint prep and pre-treatment of building materials).

- Kills and prevents mould and mildew
- Contains no bleach, ammonia or volatile organic compounds (VOCs)
- Health Canada Registered (DIN 02269996)
- CFIA Approved
- Xactimate Code: HMR-GRMBIO
- Coverage rate varies according to surface and application method

AVAILABLE PRODUCTS

620020 18.9 L

620004 3.78 L

620946 946 mL

**FOR USE ON:**

- Most hard, non-porous or semi-porous surfaces such as wood and composite wood, concrete, masonry, drywall, grout, fibreglass, tile, plastic, laminate and metal

CONCROBIUM® MOLD STAIN REMOVER – 2 PART

Concrobium Mold Stain Remover is an innovative mould stain cleaning system designed to help restoration professionals complete jobs more effectively and profitably. The unique solution quickly and easily removes the toughest mould stains on a range of surfaces, and is the ideal choice for professional mould remediators.

- Ready-to-use immediately once parts 1 and 2 are combined
- Employs peracetic acid (PAA), a highly effective oxidizing agent for mould and bacterial stains
- Requires no scrubbing and no clean-up; just wet the surface and allow to dry; Cleans most surfaces in a single application
- Can be used in homes, hospitals, schools, commercial and industrial buildings — anywhere mould stain removal is required
- Xactimate Code: HMR-GRMS

AVAILABLE PRODUCTS

629489 3.78 L/500 mL



Scan the QR code to view the Concrobium Pro Website

MOULD REMEDIATION

**FOR USE ON:**

- Large spaces and hard-to-reach areas such as basements, cellars, attics, crawlspaces and wall cavities

FOGGER

A cold (ULV) fogger is an effective application method for Concrobium Mold Control® to eliminate mould, mildew and musty odours in large or inaccessible spaces. The fogger evenly mists and saturates the air in an enclosed environment, coating all surfaces. Fogging can be an ideal approach to mould remediation in damp, musty basements, attics, crawlspaces and any large area where mould is a concern. Concrobium Broad Spectrum Disinfectant II is suitable for application by ULV cold fogging.

- Easy to use tool that atomizes Concrobium Mold Control and Concrobium Broad Spectrum Disinfectant II into a fine mist for even surface application

- Use to pre-treat building materials during construction or renovation
- 3.78 L fluid tank; 30 foot reach

AVAILABLE PRODUCTS

200620810

**FOR USE WITH:**

- Fogger

FOGGER INTAKE FILTER


Keep intake filter in place during use to help prevent dust and fog droplets from entering the unit.

- Washable and re-usable; rinse thoroughly with water and allow to dry

AVAILABLE PRODUCTS

200081CC

MOULD REMEDIATION

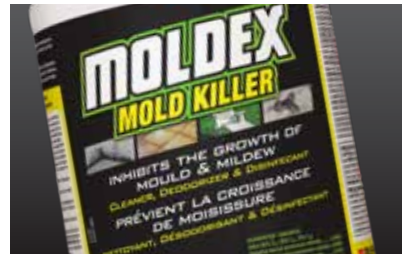**FOR USE ON:**

- Walls, floors and other hard, (inanimate) non-porous surfaces such as tables, chairs, countertops, sinks, tile, porcelain, and bedframes

MOLDEX® MOLD KILLER

Moldex Mold Killer is a one-step disinfectant cleaner that is effective against a broad spectrum of bacteria. It is fungicidal and will prevent the growth of mould and mildew and their odours when used as directed. It quickly removes dirt, grime, mould, mildew, food residue, and other organic matter commonly found in homes, basements, attics, walls, kitchens and bathrooms. It destroys and neutralizes mould, mildew and their odours at their source. It is not a masking agent or general purpose stain remover. It is a bleach-free, phosphate free, non-abrasive disinfectant mould killer that can be used on most washable surfaces.

- Inhibits the growth of mould & mildew; cleans, disinfects and deodourizes
- Bleach-free formula contains no phosphates and leaves a clean fresh scent
- Hospital grade disinfectant; non-scratch formula
- Health Canada Registered (DIN 02437198)

AVAILABLE PRODUCTS

- 350634** 18.9 L (MTO)
5522 3.78 L
5012 946 mL

**FOR USE ON:**

- Glazed ceramic tile, grout, tubs, fibreglass, shower doors, vinyl shower curtains, sinks, toilets, walls, doors, counters, glass, plastic, no-wax floors, windowsills, vinyl siding, wood, concrete, rubber, around the pool, and more

MOLDEX® INSTANT MOLD & MILDEW STAIN REMOVER

Moldex Instant Mold & Mildew Stain Remover is an aggressive cleaner that erases stains before your eyes. It delivers industrial strength cleaning action without scrubbing. Formulated with new Advanced Bleach Gel which is designed to penetrate deep and eliminate mould and mildew stains. Our Active Cling™ Technology allows powerful cleaning agents to remain (or hold) onto vertical surfaces longer to achieve the highest effective contact time. Just spray on and watch stains completely disappear.

- Removes mould and mildew stains instantly
- No scrubbing — Instant results
- Contains Advanced Bleach Gel — Indoor & Outdoor Formula

AVAILABLE PRODUCTS

- 350632** 18.9 L (MTO)
7110 946 mL

MOULD REMEDIATION

**FOR USE ON:**

- Patio furniture, awnings, shower curtains, walls, tile, grout, plastic, previously painted surfaces, basements, window frames, sealed wood, drywall, siding, shingles, tarps, tents, canvas, boat & R.V. tops, fabric, vinyl, brick and ceramic

MOLDEX® MOLD & MILDEW NON-BLEACH STAIN REMOVER

Moldex Non-Bleach Mold & Mildew Stain Remover is a multi-surface cleaner that removes deeply seated mould and mildew stains. This product is perfect for mould remediation, flood disaster, housekeeping and property maintenance applications. It leaves behind a residual stain fighting technology on the surface that lasts for months. It is a safe, powerful, bleach-free alternative, perfect for almost any surface.

- Safe, powerful, bleach-free alternative; fast acting and light scrubbing
- Indoor/outdoor; no ammonia and non-toxic
- No odour & non-corrosive; will not harm children, pets or plants; colour safe for fabrics and carpets

AVAILABLE PRODUCTS

- 5312** 946 mL

**FOR USE ON:**

- Bathtubs, sinks, showers, boats, grout and tile, vinyl curtains, siding and more

KRUD KUTTER® MOULD & MILDEW STAIN REMOVER

Krud Kutter Mould & Mildew Stain Remover Plus Blocker removes tough mildew stains and protects as it cleans.

- Environmentally friendly, bleach-free formula
- Ideal for use on most interior and exterior surfaces
- Fresh floral scent

AVAILABLE PRODUCTS

- 287851** 946 mL

CLEANERS/DEGREASERS



FOR USE ON:

- Exterior siding and roofing gutters, wood fences and decks, carpets, stucco, brick, concrete and more

KRUD KUTTER® ORIGINAL CLEANER DEGREASER

Original Krud Kutter Concentrated Cleaner/Degreaser Stain Remover cuts grease, grime, oil, tar and wax fast. No other single product removes really tough soils as quickly and effectively from so many surfaces.

- Concentrated commercial strength formula that can be used full strength or diluted with water
- Colour fast, fabric safe and leaves no residue
- Earth friendly — water-based, non-toxic and biodegradable
- Multi-surface compatibility
- NSF listed for use in food processing plants

AVAILABLE PRODUCTS

- KK55** 208 L
- KK05** 18.9 L
- 287777** 3.78 L
- 287785** 946 mL



FOR USE ON:

- Machinery and equipment, engines, tires, grills, ovens, tiles, carpet, upholstery and more

MEAN GREEN® SUPER STRENGTH

Powerful, multi-purpose cleaner and degreaser that can get grease out and eliminate grime from most surfaces. From fabric to concrete, Mean Green has been a trusted brand for more than 20 years. It is used to clean just about everything inside and outside.

- Multi-Purpose cleaner and degreaser
- Can be used full strength or diluted
- Hard surface & fabric safe

AVAILABLE PRODUCTS

- 101FE** 3.78 L
- 196FE** 2.84 L
- 136FE** 946 mL



FOR USE IN:

- Janitorial/sanitation, factories, restaurants, garages, automotive, pressure washing, parts washing, and other industrial uses

MEAN GREEN® INDUSTRIAL STRENGTH

Mean Green Industrial Strength is a highly effective, concentrated, heavy-duty all-purpose cleaner and degreaser. Eliminates grease and grime challenges faced by industrial users. Professional grade product contains 40% more active ingredients than Mean Green Super Strength.

- Eliminates grease and grime
- Dissolves oil
- NSF listed for use in food processing plants

AVAILABLE PRODUCTS

- MG104** 208 L (MTO)
- MG102** 3.78 L (MTO)
- MG132** 946 mL (MTO)



DISINFECTANTS

**FOR USE IN:**

- Hospitals, nursing homes, nurseries, medical offices, schools, military installations, athletic facilities, public areas, ambulances, institutional kitchens, cafeterias, restaurants, public restrooms, hotels and motels, garbage and refuse centres, shower and bath areas, zoos, prisons, HVAC and R equipment, dental offices, emergency areas, healthcare facilities, intensive care, operating rooms, dental operatories, by police, and EMS

CONCROBIUM® BROAD SPECTRUM DISINFECTANT II

Concrobium Broad Spectrum Disinfectant II is a germicidal detergent formulated to clean, disinfect and deodorize in a simple one-step process. This product is a broad-spectrum virucidal hard surface disinfectant that is expected to inactivate the SARS-CoV-2 the virus that causes COVID-19.

- Kills bacteria, viruses and tuberculosis
- Botanically derived active ingredient
- Ready-to-use formula does not have a harsh lingering odour
- One-step solution offers proven disinfection with superior cleaning performance
- Contains no ammonias, chlorines or glutaraldehydes
- Health Canada Registered (DIN 02483882)
- CFIA Approved
- Xactimate Code: WTR-GRMB
- Suitable for application by ULV cold fogging

AVAILABLE PRODUCTS

- 621208** 208 L (MTO)
621004 3.78 L



RUST REMOVERS

**FOR USE ON:**

- Iron, steel, aluminum, chrome, auto cooling systems and more

KRUD KUTTER® THE MUST FOR RUST

Krud Kutter The Must for Rust is a superior rust remover and inhibitor. This proprietary formulation penetrates into every void of a metal surface and dissolves rust/oxidation through chemical action. When dry, the clean surface is free of contaminants and is ready for the next step, whether it be painting, welding, plating, lubricating, etc.

- Water-based formula penetrates metal surfaces, dissolves rust and prevents future rusting
- Provides ideal surfaces for painting

AVAILABLE PRODUCTS

- 287810** 946 mL

**FOR USE ON:**

- Iron, steel, aluminum, chrome, auto cooling systems and more

KRUD KUTTER® THE MUST FOR RUST REMOVER GEL

The Must for Rust Remover GEL is the perfect solution for horizontal and vertical surfaces! The gel formula penetrates into every void of a metal surface and dissolves rust/oxidation through chemical action. Once completely dry, the surface is ready for the next step, whether it is painting, welding, plating, lubricating, etc. or simply leave the surface bare.

- Water-based

AVAILABLE PRODUCTS

- 304612** 946 mL

RUST REMOVERS

**FOR USE ON:**

- Washrooms/bathrooms, kitchens, outdoor

KRUD KUTTER® CALCIUM, LIME & RUST STAIN REMOVER

Krud Kutter Calcium, Lime & Rust Remover is a strong formula that efficiently dissolves and removes tough calcium and lime deposits as well as rust stains from the surface of showers, sinks, glass, tubs, toilets, coffee machines and kettles. Will not harm lawn or plants when used as directed. Do not apply to paint, stains or brick that contain iron oxide pigments.

- Tackles the toughest calcium, lime and rust deposits
- Dissolves mineral deposits and stains
- Biodegradable and septic safe

AVAILABLE PRODUCTS

305108 828 mL

**FOR USE ON:**

- Iron, steel, aluminum, chrome and more

WHINK® RUST STAIN REMOVER

Whink Rust Stain Remover in the "brown bottle" has been removing rust since 1947! This convenient liquid formula quickly and easily removes rust stains from white sinks and white toilets, as well as colourfast fabric and carpets.

- Quickly & easily removes rust stains!
- Safe on white sinks, white toilets, pipes and septic systems
- Won't harm fabrics
- No scrubbing required

AVAILABLE PRODUCTS

346831 946 mL

346833 473 mL

**FOR USE ON:**

- Eliminating build-up caused by soap scum and calcium in washrooms/bathrooms, kitchens and outdoors

WHINK® LIME & RUST REMOVER

Whink Lime & Rust Remover quickly dissolves rust & hard water stains, soap scum and build-up on bathroom sinks, tile, shower doors, tubs and toilets. Also leaves fibreglass, stainless steel and chrome sparkling clean. Non-abrasive, professional strength formula is specially designed for hard water areas. Dissolves away unsightly buildup without scrubbing. Can also be used full strength to clean lime scale build-up in humidifiers, vaporizers, tea kettles and cookware.

- Dissolves hard water problems and removes rust stains fast
- Great for eliminating build-up caused by soap scum and calcium
- Professional strength

AVAILABLE PRODUCTS

346843 946 mL

RUST REMOVERS

**FOR USE IN:**

- Toilets

WHINK® RUSTGUARD®

Whink RUSTGuard contains no acids, caustics, chlorine bleach, phosphates or dyes and won't attack plumbing like chlorine bleach cleaners can! This unique formula prevents the formation of rust and hard water build-up in your toilet bowl and reservoir!

- Safe on all plumbing and septic systems
- Won't harm pets
- Stops rust with every flush

AVAILABLE PRODUCTS

346846 113 g / 2 tab pack

**FOR USE ON:**

- Iron, steel, ferrous metals

RUST-OLEUM® RUST DISSOLVER JELLY

Rust-Oleum Rust Dissolver Jelly removes rust from iron, steel and other ferrous metal surfaces. Also removes bluing from steel. Provides excellent clinging properties that help make the process fast and easy.

- Excellent cling
- Applies clear
- Removes rust from metal surfaces
- Ideal for heavy rust

AVAILABLE PRODUCTS

338483 236 mL

DRAIN & SEPTIC



FOR USE IN:

- Kitchen, bathroom and shower drains

WHINK® HAIR CLOG BLASTER!®

Whink Hair Clog Blaster! is a fast acting bathroom drain opener designed to specifically attack and break down hair clogs! Hair is the biggest bathroom drain clog problem and Hair Clog Blaster is the answer!

- Professional strength liquid formula
- Pours through standing water
- Attacks and breaks down hair and soap scum
- Safe on all pipes and septic systems

AVAILABLE PRODUCTS

346838 946 mL
385901 1.89 L

1.89 L available
August 2023

SPECIALTY CLEANERS



FOR USE ON:

- Carpets and upholstery including rugs, floor mats, fabric drapes, fabric couches, throw rugs, fiber carpeting (synthetic fibers and wool) and stain resistant coatings

CONCROBIUM® CARPET SHAMPOO

Concrobium Carpet Shampoo is a non-toxic, odour-blocking solution that leaves carpets and upholstery with a deep, long-lasting clean. The special formulation contains Concrobium's antimicrobial technology to eliminate and prevent musty odors caused by mould and mildew. It contains no soaping agents, so there's no sticky residue left behind to cause resoiling and dulled appearance.

- Safe for all types of carpets and upholstery
- Eliminates musty odours
- No need for anti-foaming additives
- For use with standard rental and pro hot water extractor carpet cleaning machines
- Fragrance-free

AVAILABLE PRODUCTS

216004 3.78 L
215189CC 1.89 L

SPECIALTY CLEANERS



FOR REMOVAL OF:

- Adhesive caulk, foam insulation, mastic, silicone, roofing tar, asphalt, diesel, soot and more

KRUD KUTTER®
ULTRA POWER REMOVER

Krud Kutter Ultra Power Specialty Adhesive Remover is a highly safe alternative to acetone, paint thinners and other traditional solvents.

- Quick release, professional strength formula that does not contain any petroleum solvents, bleach or ammonia

AVAILABLE PRODUCTS

287858 473 mL



FOR USE ON:

- Aluminum, brick, cinder block, concrete, fibreglass, Formica, glass, metals, street signs, stainless steel, etc.

KRUD KUTTER®
GRAFFITI REMOVER

Krud Kutter Graffiti Remover is the ultimate spray paint and graffiti remover.

- Safe, water-based formula
- Removes acrylic, aerosol paint, enamel, high gloss, oil lacquers, primer, sealers, permanent markers, ink and more

AVAILABLE PRODUCTS

287852 946 mL



FOR USE ON:

- Asphalt, concrete, masonry, composite/wood decks, patios, walkways and more


KRUD KUTTER®
OIL GRABBER® STAIN REMOVER

Krud Kutter Oil Grabber Oil Stain Remover absorbs and lifts embedded oil stains without scrubbing.

- Removes anti-freeze, brake, diesel, hydraulic and transmission fluids, cooking oils, grease, tree sap and wax

AVAILABLE PRODUCTS

287779 946 mL

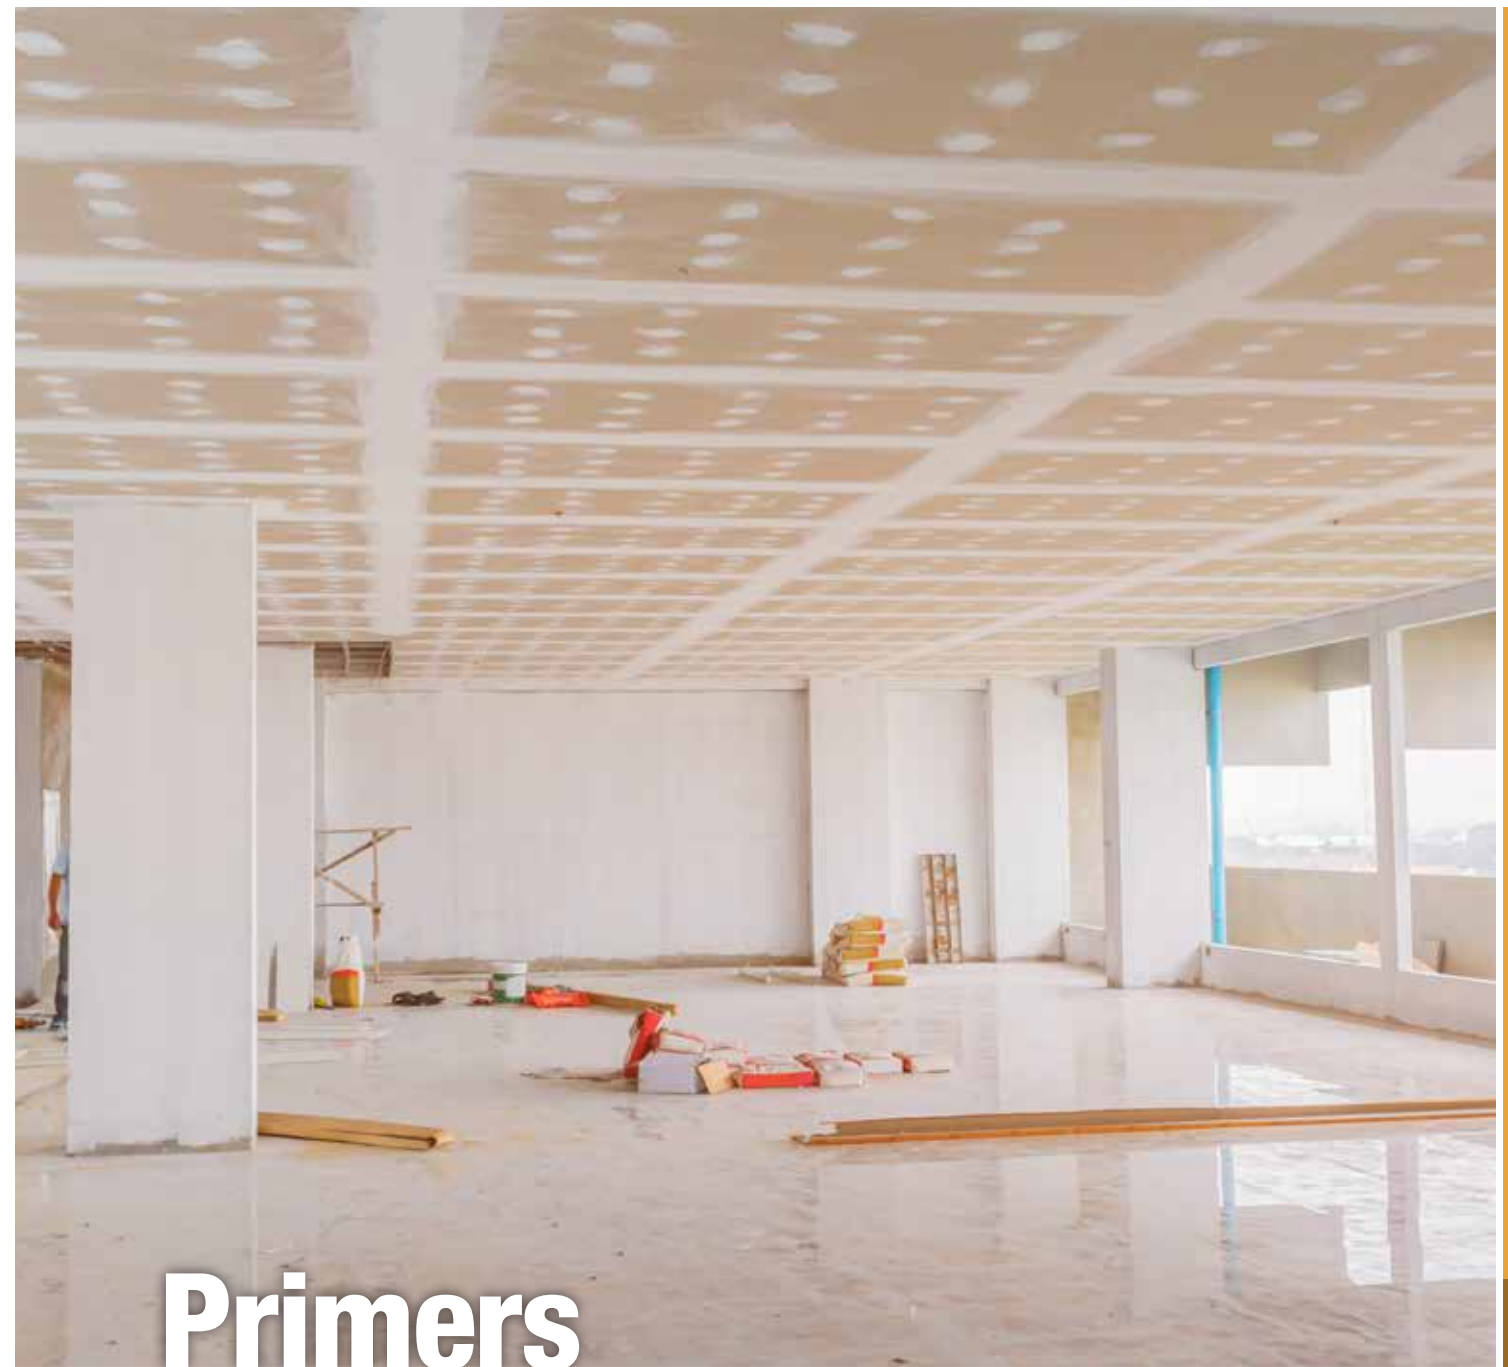

Primers

Rust-Oleum Primers have a solution for every problem. From mould and mildew, to stains and protection, our wide range of high-performance Primers makes it easy to resolve common issues. Professional quality, fast-drying formulas make problem solving simple.



Scan the QR code to visit the Zinsser page

ARCHITECTURAL



FOR USE ON:

- Interior or exterior wood, concrete, drywall or non-galvanised metal

ZINSSER® TURBO™ BULLS EYE 1-2-3®

Zinsser pairs the trusted performance of Bulls Eye 1-2-3® with the innovative Turbo Spray System™ to unleash 3X more primer spray per second than traditional spray primers. Now you can tackle your largest projects faster and easier than ever.

• **The speed and quality of professional spray equipment without the hassle**

- Optimized for large projects
- Dries in minutes, recoat in 30 minutes
- Sticks to all surfaces
- Great for high pH surfaces
- Provides a smooth surface, requires less sanding
- No sag, no drip formula

AVAILABLE PRODUCTS (737 g)

- 384837 Flat White

APPLICATION

SUBSTRATE

STEEL

WOOD

MASONRY

VOC g/l

COMPLIANT NATIONWIDE

ARCHITECTURAL



FOR USE ON:

- SEALING – Seals interior/exterior bare wood, flat paint and spackling.
- BONDING – Sticks to non-galvanised metals, glossy paint, ceramic tile, glass, etc.

ZINSSER® TURBO™ COVER STAIN® OIL-BASED PRIMER-SEALER

Zinsser combines the professional formula of Cover Stain® All Purpose Primer with the powerful Turbo Spray System™, to provide a solution for priming medium to large size projects FAST. Get your project done quicker and easier with Zinsser® Cover Stain® with Turbo Spray System™.

• **The speed and quality of professional spray systems without the hassle**

- 3X greater output than traditional spray primers
- 25 cm (10") wide spray pattern for fast coverage

AVAILABLE PRODUCTS (737 g)

- 384838 Flat White

APPLICATION

SUBSTRATE

STEEL

WOOD

MASONRY

VOC g/l

COMPLIANT NATIONWIDE



FOR USE ON:

- Interior ceilings, walls, doors, trim, cabinets, furniture and related paintable surfaces. Exterior uses are limited to spot priming only

ZINSSER® TURBO™ B-I-N® SHELLAC BASE PRIMER-SEALER

Zinsser® BIN® with Turbo Spray System™ combines the power of BIN® shellac-base primer with the speed and convenience of the Turbo Spray System® to provide the perfect aerosol solution for priming medium to large sized projects fast. The Turbo Spray System™ with spray up to 25 cm (10") wide allows for faster project completion making it the ideal primer aerosol for large projects. Zinsser® BIN® with Turbo Spray System™ is great for blocking stains and odours from water, fire, and smoke and is perfect for disaster restoration jobs. It will also block odours from pets, urine, mould & mildew, and cigarettes. BIN is a great wood sealer and will sand easily to a powder when dry. It sticks to all surfaces, even ceramic tile & glass. Use on any interior wood, concrete, drywall, or non-galvanized metal. Exterior uses are limited to spot priming only. Zinsser® BIN® with Turbo Spray System™ can be used under and over most architectural latex and oil-based paints.

• **Blocks water stains, knots & sap**

- Best wood sealer
- Dries in 15 minutes

AVAILABLE PRODUCTS (737 g)

- 384836 Flat White

APPLICATION

SUBSTRATE


STEEL

WOOD

MASONRY

VOC g/l

COMPLIANT NATIONWIDE

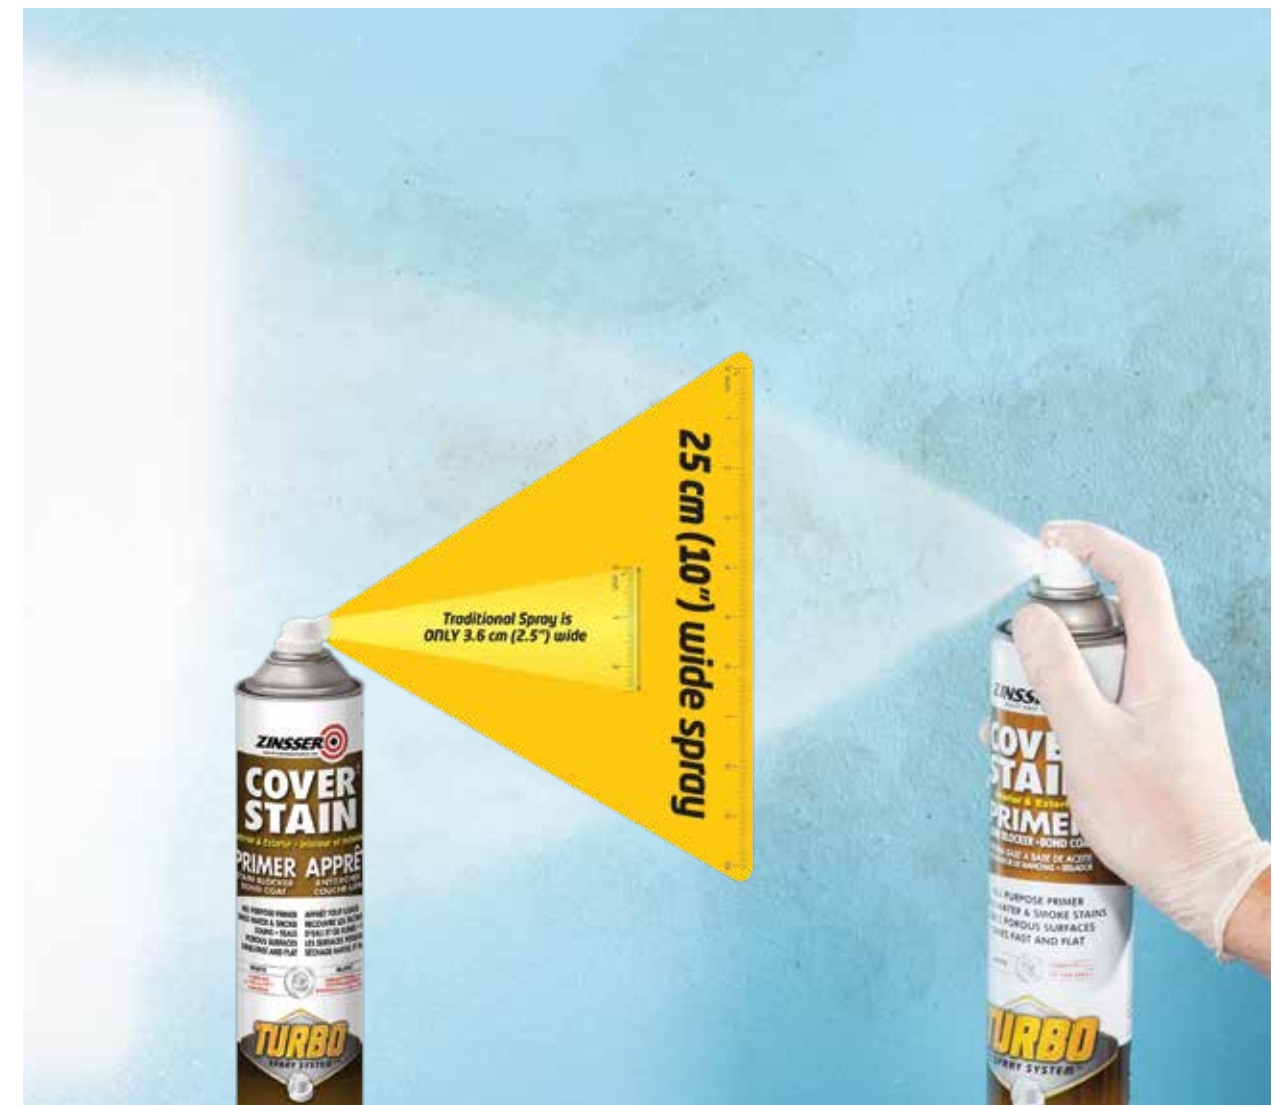

ARCHITECTURAL



FOR USE ON:

- Interior and exterior surfaces including new drywall, wood, masonry, metal, glossy surfaces and more
- Completely and effectively blocks stains from crayons, graffiti, grease spots, tannins – even light water stains
- MPI # 3, 6, 17, 107, 125, 134, 137

ZINSSER® BULLS EYE 1-2-3® WHITE WATER-BASED PRIMER-SEALER

Bulls Eye 1-2-3 is a whole-house, universal interior and exterior, water-based stain-blocking primer-sealer. Excellent adhesion to glossy surfaces, including tile and enamelled trim. Low odour and easy-to-apply with great flow and levelling. Breathable, flexible acrylic formula resists blistering and peeling.

- **Mould and mildew-resistant film makes it great for high humidity areas**
- Application at temperatures as low as 2°C (35°F)
- Tintable
- Dries to touch in 30 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

Z02014 946 mL Z02012 3.78 L
Z02010 18.9 L 267189 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37-42 m²
(400-450 ft²) per 3.78 L

ARCHITECTURAL



FOR USE ON:

- Non-porous interior and exterior surfaces; masonry, siding, metal, and drywall

ZINSSER® MOULD STOP WHITE WATER-BASED PRIMER

Zinsser Mould Stop Primer is a water-based coating that can be used to paint over existing stains left by mould, mildew, moss, fungi and any other fungal organisms. The Mould Stop Primer contains an mildewcide to prevent the growth of mould, mildew and other fungal organisms on the paint film.

- **Prevents odour causing bacteria on paint film***
- Prime over existing mould and mildew stains
- Interior/Exterior; water-based
- Binds chalky siding, masonry, and metal
- Dries to touch in 30 minutes; can be recoated in 1 hour

*Inhibits the Growth of Mould and Mildew on paint film

AVAILABLE PRODUCTS

336964 946 mL 336961 3.78 L **Coming Soon** 381865 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37-41.8 m²
(400-440 ft²) per 3.78 L



FOR USE ON:

- All types of bare or painted surfaces including wood, drywall, cured plaster, concrete, stucco and masonry, aluminum, vinyl, steel, galvanized metal and PVC

ZINSSER® BULLS EYE 1-2-3® GREY WATER-BASED PRIMER-SEALER

Zinsser Bulls Eye 1-2-3 Grey Primer is an all purpose, high performance, water-based primer for interior and exterior residential, commercial and industrial applications. Bulls Eye 1-2-3 Grey Primer has excellent stain blocking resistance, is fast drying and has excellent adhesion to glossy surfaces. Use Bulls Eye 1-2-3 Grey Primer with rich or dark topcoat colours to improve their hide and coverage. The dried film is mould and mildew resistant.

- **Improves hide and coverage of deep colour paints**
- Seals uniformly; blocks stains
- Dries to touch in 30 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

201746 946 mL 201791 3.7 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37 m²
(400 ft²) per 3.7 L



FOR USE ON:

- All painted or unpainted interior surfaces such as wood floors, cabinets, walls and ceilings, including drywall, cured plaster, masonry, metal and PVC

ZINSSER® ODOUR KILLING PRIMER CLEAR WATER-BASED PRIMER-SEALER

Zinsser Odour Killing Primer is a low odour, water-based primer that kills existing odours on interior surfaces. It applies white and dries fast to a clear, low sheen finish to permanently seal in odours. Odour Killing Primer is designed to eliminate difficult existing odours from pets (including urine), food, cigarette and cigar smoke, fire and smoke damage. Odour Killing Primer is compatible with all clear finishes and paints, both water and oil based.

- **Applies white, dries clear**
- Compatible with all paints and clear finishes
- Dries to touch in 25 minutes; can be recoated in 45 minutes

AVAILABLE PRODUCTS

316873 946 mL 316872 3.78 L 320240 340 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 32.5-37 m²
(350-400 ft²) per 3.78 L



FOR USE ON:

- Old glossy paints and clear finishes, metal, fibreglass, PVC, composites, glass and tile

ZINSSER® BULLS EYE 1-2-3® DEEP TINT WATER-BASED PRIMER-SEALER

Bulls Eye 1-2-3 DEEP TINT offers the same interior and exterior, all-surface, all-purpose performance of Bulls Eye 1-2-3 and allows the addition of more tint to reach colour depths not possible with typical primers. This high-performance water-based primer-sealer/stain blocker/bond coat is designed to accept up to 24-48 mL per litre to tone the surface towards the finish colour and increase the hiding power of the topcoat.

- **Use over or under any oil or water-based paint**
- Dries to touch in 30 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

Z02134 902 mL Z02131 3.6 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37-42 m²
(400-450 ft²) per 3.6 L



FOR USE ON:

- Prime drywall, cured plaster, wood or metal doors, windows, paneling and trim; clean galvanized metal; glossy laminates and other interior surfaces
- MPI # 17, 39, 50

ZINSSER® BULLS EYE® WATER-BASED PRIMER-SEALER

This all-purpose formula, designed for the professional painter is great for interior walls, ceilings, doors, trim, panelling — any surface where a fast-drying, low odour, high-adhesion primer-sealer is required.

- **Blocks solvent-based stains to prevent them from bleeding through the topcoat**
- A quick-drying, quick-sanding, high hide, superior adhesion, stain-blocking primer that is compatible with all topcoats
- Dries fast and dead flat
- Dries to touch in 30 minutes; can be sanded or recoated in 1 hour

AVAILABLE PRODUCTS

254067 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37 m²
(400 ft²) per 3.78 L

ARCHITECTURAL



FOR USE ON:

- Drywall, wood, cured plaster, masonry, hardboard, vinyl, PVC, fiberglass, tile or metal
- MPI #17, 17X, 39, 50, 50X, 137, 137X, 149, 149X

ZINSSER® BULLS EYE ZERO™ WATER-BASED PRIMER

Bulls Eye Zero Primer delivers “best in class” performance in an eco-friendly, LEED compliant, zero VOC formula that’s great for all interior and exterior surfaces. It sticks to tough surfaces including chalky siding and hardboard.

- **Seals porous surfaces like drywall, new wood, concrete and “builders flat” in just one coat**
- Packaged in a container made from 100% recycled plastic
- Dries to touch in 30-45 minutes; can be recoated in 1 hour

AVAILABLE PRODUCTS

254282 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC ZERO

Covers: 37 m² (400 ft²) per 3.78 L



FOR USE ON:

- Hardboard, chipboard, glass, ceramic tile, PVC, metal pipes and galvanized duct work
- MPI #36, 46, 50, 136

ZINSSER® B-I-N® SHELLAC BASE PRIMER-SEALER

B-I-N is the original pigmented shellac-based stain-killing primer-sealer. Great for knots, water stains, fire and smoke damage. Best interior new wood primer. Dries in minutes; recoat in 30 minutes. Seals in tough stains, pet, smoke and fire odours. Great under all topcoats.

- **Use on all interior surfaces and for spot priming on exterior surfaces**
- Sticks to all surfaces without sanding, etching or deglossing
- Dries to touch in 15 minutes; can be recoated in 30 minutes

AVAILABLE PRODUCTS

Z00918 473 mL Z00911 3.7 L
Z00914 946 mL Z00910 18 L Z01018 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <550

Covers: 37-47 m² (400-500 ft²) per 3.7 L



FOR USE ON:

- Wood, drywall, cured plaster, masonry, galvanized metal, PVC and glass and ceramic tile

ZINSSER® B-I-N® ADVANCED SYNTHETIC SHELLAC

B-I-N Advanced is a synthetic shellac base primer-sealer that provides the ultimate in stain blocking for whole-surface interior priming and exterior spot priming. It combines fast dry time, low application odour, outstanding hide and superior stain blocking, making it the ideal choice for new construction, remodelling and fire and water damage restoration.

- **Sticks to all surfaces**
- High hiding
- Blocks odours
- Dries to touch in 25 minutes; can be recoated in 45-60 minutes

AVAILABLE PRODUCTS

273873 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37 m² (400 ft²) per 3.78 L

ARCHITECTURAL



FOR USE ON:

- Wood, panelling, Formica®, glossy paints and varnishes, tile, drywall, cured plaster, masonry, metal and PVC

ZINSSER® B-I-N® 2 ALKYD PRIMER-SEALER

B-I-N 2, a soy-based alkyd primer, stain blocker, and odour sealer, is an economical alternative to B-I-N Shellac Base Primer Sealer. It seals difficult stains from water, fire and smoke damage and can be used to spot prime knots and sap streaks. B-I-N 2 also seals odours from smoke, food and pet accidents.

- **Sticks to all surfaces without sanding or deglossing**
- Dries to touch in 35 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

261663 946 mL 261664 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <350

Covers: 37 m² (400 ft²) per 3.78 L



FOR USE ON:

- Wood, hardboard, drywall, cured plaster and masonry, spackled areas, ceiling tiles, wood and metal doors
- MPI # 45, 69, 136, 223

ZINSSER® COVER STAIN® OIL-BASED PRIMER-SEALER

Cover Stain is an all-purpose oil-based stain-blocking primer-sealer. Ideal for interior and exterior applications. Recoat in only two hours. Great for cedar bleed. May be used under any oil-based or water-based topcoat.

- **Seals water, smoke and nicotine stains**
- Seals porous surfaces; Sands easily
- Dries to touch in 30 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

256185 946 mL 256184 3.7 L
256188 18.9 L Z03618 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <350

Covers: 37-41.8 m² (400-450 ft²) per 3.7 L



FOR USE ON:

- Wood, drywall, cured plaster, concrete, stucco and masonry, aluminum, vinyl, galvanized, PVC, panelling, laminates, and ceramic tile
- MPI # 45, 136

ZINSSER® ODORLESS OIL-BASED PRIMER-SEALER

Odorless Oil-Based Stain Blocker is a high-solids, low VOC specialty primer for interior use when the stain blocking performance of an oil is required, but odour is a concern. Developed specifically for “people-sensitive” areas in commercial and residential environments, the state-of-the-art sprayable formula has even less odour than most water-based primers.

- **Non-yellowing, dries flat to a bright white finish and sands easily**
- Excellent at blocking stains from water, smoke, nicotine, graffiti, tannin and more
- Dries to touch in 30 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS

248264 946 mL 248263 3.78 L
254168 369 g

APPLICATION

SUBSTRATE

VOC g/l

VOC <350

Covers: 33-37 m² (350-400 ft²) per 3.78 L

ARCHITECTURAL



FOR USE ON:

- PVC sheeting & piping, vinyl, tile, glazed block and brick, galvanized steel, drywall, masonry, glass, panelling
- MPI #17

ZINSSER® BONDZ® URETHANE-ACRYLIC MAXIMUM ADHESION PRIMER

Bondz Maximum Adhesion Primer is an interior/exterior water-based primer that bonds any top coat, including solvent based and epoxies, to hard, dense surfaces. The fast-drying urethane modified acrylic formula can be top coated in just 2 hours, faster than other bonding primers.

- **Bonds hard, dense surfaces to any top coat**
- Exceptional flow and levelling
- Outstanding wet adhesion; very low odour and low VOC levels
- Dries to touch in 30 minutes; can be recoated in 1 hour, 6 hours for two-part epoxies

AVAILABLE PRODUCTS
 262281 946 mL 262282 3.7 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 37 m²
(400 ft²) per 3.7 L



FOR USE ON:

- New construction and repainting or repair of interior drywall

ZINSSER® GARDZ® PROBLEM SURFACE SEALER

Zinsser Gardz is a new technology, fast-drying, water-based, penetrating sealer and sizing for interior wall and surface covering. It penetrates, seals and binds unstable surfaces.

- **Mould and mildew resistant film**
- Higher build for porous surfaces
- Seals textured surfaces
- Wallpaper strippable
- Dries to touch in 30 minutes; can be recoated in 3 hours

AVAILABLE PRODUCTS
 289393 916 mL 289394 3.61 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 33-42 m²
(350-450 ft²) per 3.61 L



FOR USE ON:

- Acrylic, ABS, fibreglass, PVC, nylon, polycarbonate, polypropylene, polyurethane, TPO, priming plastics, moulded parts, vinyl, windows, doors, shutters, fencing, light poles, facia, vents, trim & mouldings and more

ZINSSER® VINYL & PLASTIC BONDING PRIMER

Zinsser Vinyl & Plastic Bonding Primer is ideal for prepping hard-to-paint plastic and vinyl surfaces found in homes and building construction. Great for vinyl, windows, doors, shutters, fencing, light poles and more.

- **Bonds paint for long-lasting adhesion**
- Prevents paint from peeling
- Topcoat with oil-based, water-based, 2K urethane or 2K epoxy paint
- Dries to touch in 20-30 minutes; can be recoated in 2-3 hours

AVAILABLE PRODUCTS
 289379 916 mL

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 15 m²
(162.5 ft²) per 916 mL

ARCHITECTURAL



FOR USE ON:

- Wood/wood siding, PVC/plastic, plywood, brick, stucco, masonry, concrete, plaster, aluminum, aluminum siding, metal, galvanized steel, and fiberglass

ZINSSER® PEEL STOP® PLUS HIGH BUILD BINDING PRIMER

Peel Stop Plus High Build Binding Primer is a high-performance water-based binding primer that stops peeling paint by gluing down worn paint edges from previous paint jobs that can lead to topcoat cracking. It is 3 times thicker than regular primers, creating a smoother surface for finishing. Peel Stop Plus also has outstanding flexibility so topcoats last longer.

- **Stops peeling paint**
- Creates a smoother finish — seals weathered surfaces
- Outstanding flexibility; dries white
- Dries to touch in 30 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS
 266847 946 mL 268560 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 5-19 m²
(50-200 ft²) per 3.78 L
(25-30 mils wet)



IDEAL FOR:

- New or previously painted wallboard, plaster ceilings and walls, and any wood trim
- MPI #43, 54

ZINSSER® PERMA-WHITE® MOULD & MILDEW-PROOF™ WATER-BASED INTERIOR PAINT

Perma-White Mould & Mildew-Proof Interior Paint is a water-based paint specifically designed to withstand the harsh conditions of the moisture-prone areas in your home. Its unique formulation prevents mildew growth on the paint film even under the harshest conditions.

- **Mould & Mildew-Proof guarantee for 10 years**
- Self-priming, available in satin or semi-gloss finishes
- Easy to apply
- Dries to touch in 60 minutes; can be recoated in 2 hours

AVAILABLE PRODUCTS
 Z02714 Satin - 931 mL
 Z02755 Semi-Gloss - 931 mL
 Z02712 Satin - 3.78 L
 Z02762 Semi-Gloss - 3.78 L

APPLICATION

SUBSTRATE

VOC g/l

VOC <50

Covers: 19-23 m²
(200-250 ft²) per 3.78 L
based on recommended two-coat application

ARCHITECTURAL



FOR USE ON:
 • All ceilings including kitchens, bathrooms, basements, closet, porch and more


ZINSSER® CEILING PAINT WATER-BASED STAIN-BLOCKER

Zinsser Ceiling Paint is a water-based ceiling paint that offers superior stain-blocking coverage in just one coat.

• **No-spatter formula; goes on pink, dries in one hour or less to a bright white flat finish that's mould and mildew resistant**

- Seals water and other household stains without the odour of oil-based primers or paints
- Hides imperfections on new or previously painted drywall, plaster, wood, textured and popcorn ceilings
- Dries to touch in 1 hour; can be recoated in 1 hour

AVAILABLE PRODUCTS
 254065 3.7 L

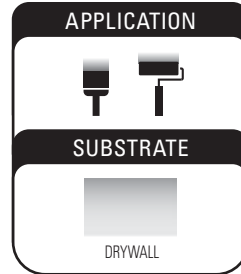

Covers: 23-37 m²
 (250-400 ft²) per 3.7 L

REMEDICATION



FOR USE ON:
 • Basements, foundations, retaining walls and other interior or exterior concrete, stucco, masonry and concrete block surfaces


ZINSSER® WATERTITE® MOULD & MILDEW-PROOF* WATERPROOFING PAINT

WaterTite Mould & Mildew-Proof* Waterproofing Paint has a unique oil-based formula that combines a state-of-the-art waterproofing resin with Portland cement to create a coating that stops up to 34 psi of water pressure. It also contains a mildewcide to prevent the growth of mould and mildew for a minimum of ten years after application, making it great for basements and other masonry surfaces where mould and mildew can be problematic.

- **LIFETIME WATERPROOF GUARANTEE, Mould & Mildew-Proof* GUARANTEE FOR 10 YEARS**
- Resists 34 psi of water pressure
- Smooth, non-gritty finish applies easily to wet or dry walls
- Ultra low odour oil-based formula has even less odour than latex paint
- Dries to the touch in 1 hour; can be recoated after 4 hours

*This product contains a mildewcide to prevent the growth of mould and mildew on the paint film only.

AVAILABLE PRODUCTS
 Z05011 3.7 L Z05013 11.34 L

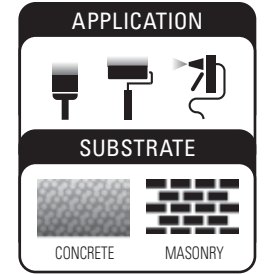

Covers: 7 m² (75 ft²) of porous surface on the first coat, 9.3 m² (100 ft²) on the second coat




FOR USE ON:
 • Heavy duty repairs, interior or exterior plaster, wood, drywall, wallboard, brick, concrete, stucco, paint and metal

ZINSSER® MH READY PATCH™

Get the strength of plaster and the workability of spackling paste with Zinsser Ready Patch Professional Formula Spackling & Patching Compound. This full-bodied product is durable enough for your most heavy-duty repairs, indoors or out.

- **Full-bodied for heavy-duty interior/exterior repairs**
- Shrink resistant – won't sag or crack like drywall mud
- Can be painted when dry to the touch
- May be primed or painted when dry to touch (normally less than 30 minutes)

AVAILABLE PRODUCTS
 320254 473 mL

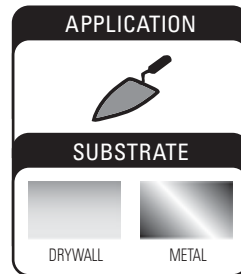

FOR USE ON:
 • Basements, foundations, retaining walls and other interior or exterior concrete, stucco, masonry and concrete block surfaces


ZINSSER® WATERTITE® LX MOULD & MILDEW-PROOF* LATEX WATERPROOFING PAINT

WaterTite LX is a multi-purpose, latex-based concrete and masonry waterproofing paint. It forms an impermeable barrier to water on interior or exterior, vertical or horizontal, concrete block, cast-in-place concrete and cementitious stucco. When applied to basement or cellar walls, it stops moisture from entering. When applied to canals or holding basins it stops water from exiting into the substrate. It is also an excellent block-filler for use in car washes, garages and exterior walls.

- **20-YEAR WATERPROOF GUARANTEE, Mould & Mildew-Proof* GUARANTEE FOR 10 YEARS**
- Resists 20 psi of water pressure
- Ultra-smooth finish
- Great for wet or dry walls
- Dries to touch in 2 hours; recoat in 2-3 hours

*This product contains a mildewcide to prevent the growth of mould and mildew on the paint film only.

AVAILABLE PRODUCTS
 265652 3.78 L

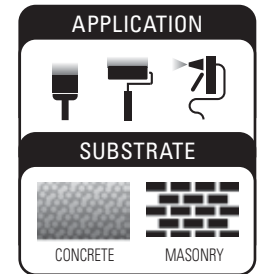

Covers: 11.6 m² (125 ft²) per 3.78 L

REMEDICATION

**FOR USE ON:**

- Stucco, brick, tilt-up, pre-cast, or poured-in-place concrete as well as CMU and cement block
- MPI #36, 46, 50, 136

ZINSSER® WATERTITE® FLEXIBLE PRIMER & FINISH


WaterTite Flexible Primer & Finish can be applied to a multitude of vertical concrete and masonry surfaces including stucco, brick, tilt-up, pre-cast, poured-in-place, CMU and cement block. This high build, moisture and mildew resistant, low VOC coating can be applied to fresh vertical concrete after 72 hours with a high alkali pH level up to 13.8 and offers elastomeric qualities to fill hairline cracks up to 1.5 mm (1/16").

- **Expands and contracts to fill hairline cracks**
- One coat primes, two coats prime and finish
- Can be applied to new concrete & stucco within 72 hours
- Mildew resistant finish
- Tintable to 24 colours
- Dry to touch in 4 hours; recoat in 2 hours

AVAILABLE PRODUCTS

283569 Deep Tint Base - 3.55 L

283570 White Tint Base - 3.55 L

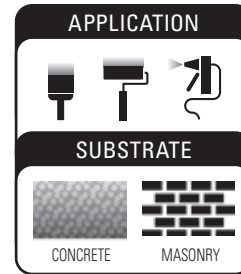

Covers: 9-12.5 m²
(100-135 ft²) per 3.55 L

**FOR USE ON:**

- Concrete
- Masonry surfaces


ZINSSER® WATERTITE® ETCH & CLEANER FOR CONCRETE & MASONRY

WaterTite Etch & Cleaner for Concrete & Masonry is a sulfamic acid-based etching and cleaning solution. Ideal for removing tough, caked-on efflorescence and excess mortar build-up on concrete, stone, brick, tile and galvanized metal when mixed with warm water. It also provides a light surface etch to promote the coating penetration and adhesion over concrete and other masonry surfaces.

- **Prepares concrete for waterproofing and painting**
- Removes efflorescence
- Safer than muriatic acid

AVAILABLE PRODUCTS

265985 355 mL

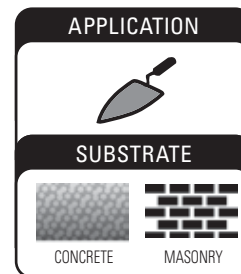

REMEDICATION

**FOR USE ON:**

- Concrete
- Masonry surfaces


ZINSSER® WATERTITE® HYDRAULIC CEMENT FOR CONCRETE & MASONRY

WaterTite Hydraulic Cement for Concrete & Masonry stops water flow from active and non-active water leaks. It permanently seals deep cracks and holes in all grades of concrete. Developed for use prior to waterproofing or painting, this quick-setting formula creates a watertight seal in 5 minutes, even when water is present.

- **Seals deep cracks and holes**
- Adheres to wet surfaces
- Creates watertight seal in 5 minutes
- Use for patching and anchoring

AVAILABLE PRODUCTS

266296 1.13 kg

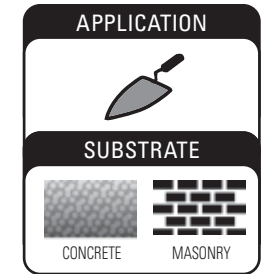**FOR USE ON:**

- Seal joints such as expansion and control joints, cracks in concrete walls, walkways, floors, windows, doors and panels


ZINSSER® WATERTITE® POLYURETHANE SEALANT FOR CONCRETE & MASONRY

WaterTite Polyurethane Sealant for Concrete and Masonry is a high performance, moisture-curing polyurethane joint sealant that seals and waterproofs. This permanently flexible joint filler was developed for use on interior and exterior concrete and masonry surfaces. Elastic and non-brittle, it will not break or chip.

- **Flexible joint filler**
- Fills cracks and voids
- Seals and waterproofs
- Remains flexible over time

AVAILABLE PRODUCTS

265984 300 mL

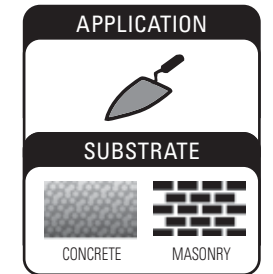

REMEDIATION



FOR USE ON:

- Wood, metal, most plastics, fiberglass, formica, tile, porcelain, glazed block, glass, ceramic, kynar siding, aluminum, galvanized steel, silicone polyester siding and more

X-I-M® ADVANCED® TECHNOLOGY UMA® BRAND

Advanced Technology UMA Brand bonder maintains adhesion under demanding conditions. Moisture destroys the adhesion of ordinary water-based primers to hard, glossy surfaces. Advanced Technology UMA Brand is engineered for unmatched wet adhesion, to either interior or exterior surfaces. It helps resist the problems of wrinkling, blistering or cracking caused by moisture penetrating the top coat. Contains FLASH BOND® TECHNOLOGY, a unique water-based NANO PARTICLE formulation for enhanced adhesion and hardness.

- Adhesion to hard, glossy surfaces including Kynar®, tile, glass and Formica®
- Cures in temperatures above 2°C (38°F)
- Bonds all topcoats; including those with latex, oil finishes, urethane, epoxy or lacquer
- Low odour and low VOC
- Dries to touch in 30-45 minutes; can be recoated in 24 hours

AVAILABLE PRODUCTS

1105C2 917 mL 1105C1 3.61 L 1105C6 18 L


APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 42 m²
(450 ft²) per 3.61 L

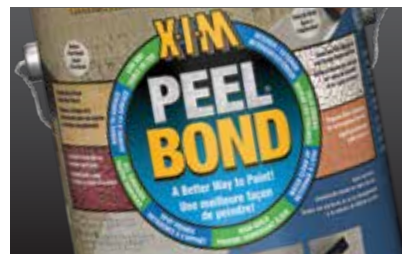

FOR USE ON:

- Wood, T1-11 siding, plywood, stucco, brick, aluminum, galvanized metal, fiberglass, PVC plastic, door frames, window sills/frames, walls, siding, shutters, barns/sheds, garage doors and more

X-I-M® PEEL BOND®

PEEL BOND is a high-build, water-based bonding primer that fills and repairs cracked and weathered surfaces for latex topcoats. PEEL BOND can be applied 33% thicker, up to 40 mils wet on a dry, vertical surface without sagging. It is a Thixotropic Polymer system designed to increase film build without sacrificing adhesion, film formation or spray-pump life.

- Eliminates call backs
- Longer lasting finish coat
- Cleans up with water
- Interior and exterior use
- Dries to touch in 30-60 minutes; can be recoated in 1-2 hours

AVAILABLE PRODUCTS

1146C1 3.61 L


APPLICATION

SUBSTRATE

VOC g/l

VOC <100

Covers: 4.6-37.2 m²
(50-400 ft²) per 3.61 L

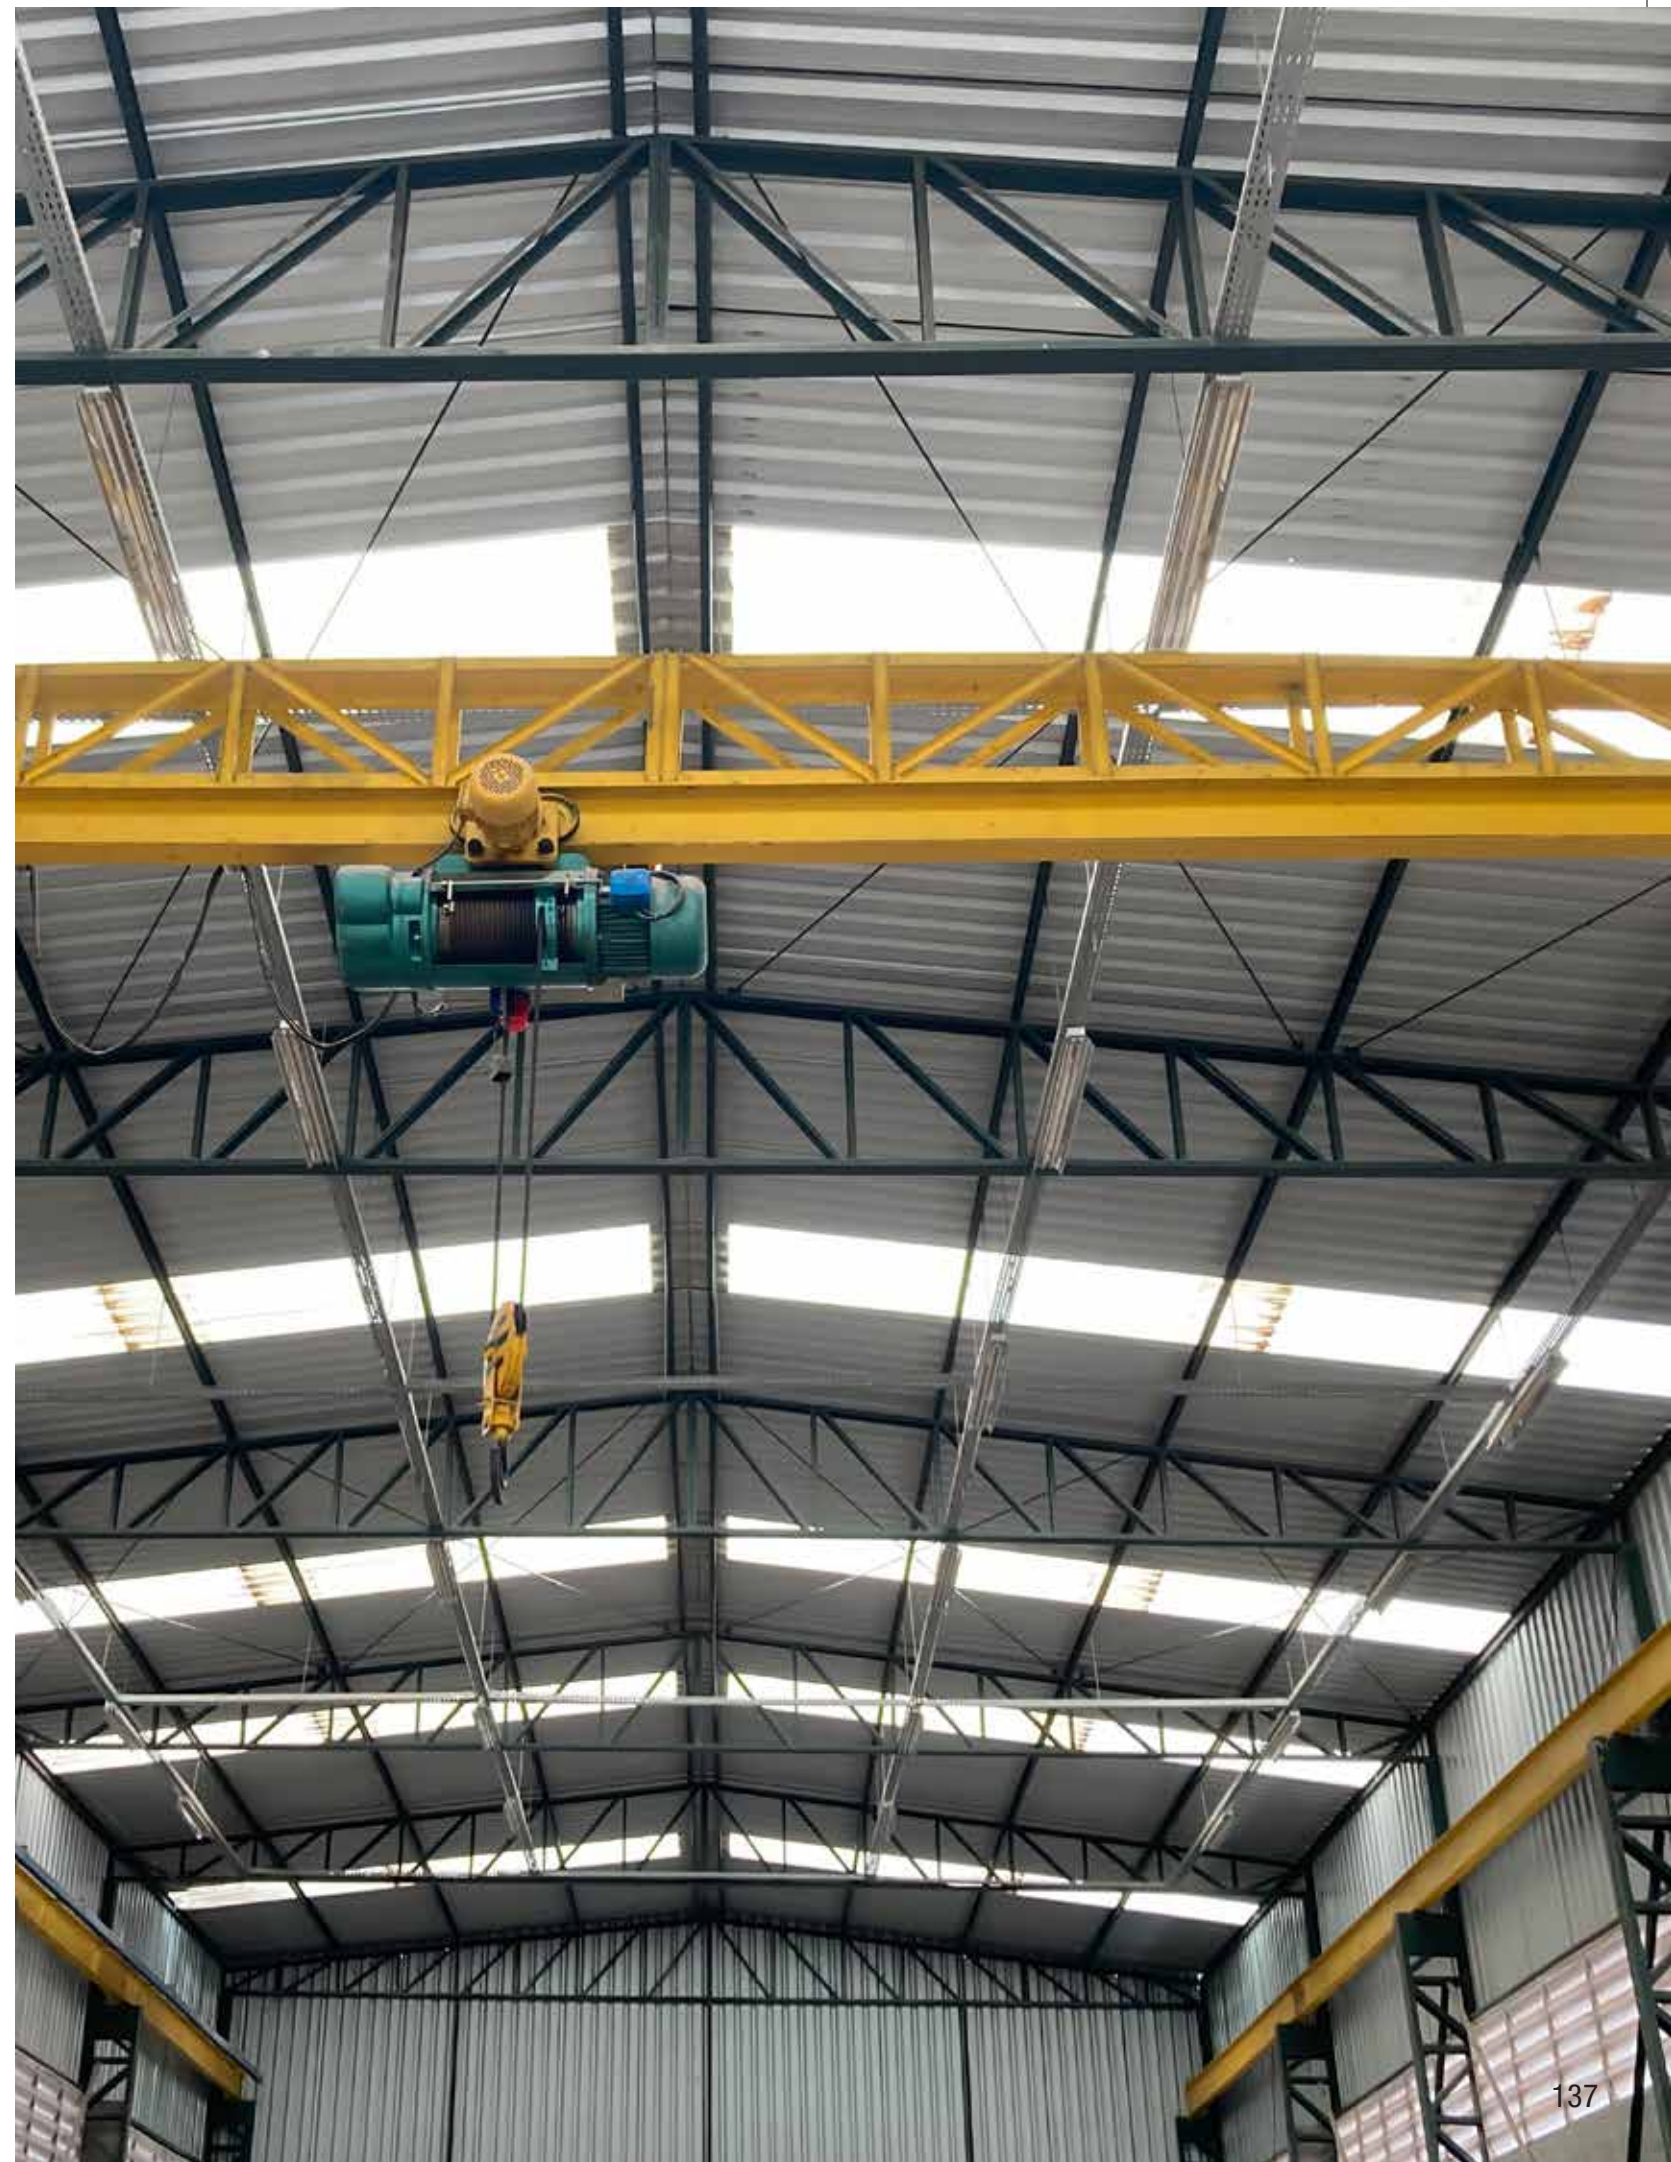



Wall Paint

Rust-Oleum® Paint + Primer Interior Paint is a low-odour, user-friendly pre-tinted formula that makes painting easy; washable and highly durable paint with excellent coverage and a great final finish.



Scan the QR code to view the Colour Spark website

ARCHITECTURAL




FOR USE ON:

- Walls
- Trim
- Windows
- Doors (priming recommended)

**COLOUR SPARK™
ADVANCED
PAINT + PRIMER**

Rust-Oleum® Colour Spark™ Interior Paint + Primer Wall Paint in one is a user-friendly pre-tinted formula that makes painting easy. Simple and modern on-trend neutrals have been specially curated of suit any space; all hues will work with each other making the colour decision simple.

- **100% Acrylic**
- Ready-to-use
- Exceptional durability and scrubability
- Mould and mildew resistant coating
- Resilient final finish
- Enhanced stain resistance and blocking

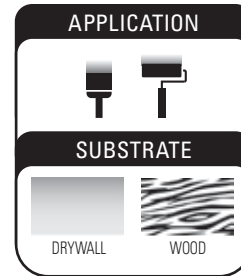

Covers: 37 m²
(400 ft²) per 3.78 L

COLOURS (EGGSHELL) (3.78 L)

- 374052** Clay Mask Green
- 374060** Light Cream
- 374061** Picket Fence White
- 374063** Powder Room Blue
- 374064** Greyscale
- 374065** Ivory Canvas
- 374067** Pebble Grey
- 374069** Stellar Navy
- 374072** White Cotton
- 374074** Charcoal Black
- 374096** Cement Grey
- 374240** Pottery Green
- 374241** Pink Parasol

COLOURS (SEMI-GLOSS) (3.78 L)

- 374073** White Cotton
- 374075** Charcoal Black

COLOURS (FLAT) (3.78 L)

- 374070** Ceiling White
- 374071** White Primer

EXTERIOR COLOURS (FLAT) (3.78 L)

- 374136** Black
- 374137** White

EXTERIOR COLOURS (SATIN) (3.78 L)

- 374138** Black
- 374139** White



ARCHITECTURAL




FOR USE ON:

- Walls
- Trim
- Windows
- Doors (priming recommended)

**SURE COLOUR™ INTERIOR
PAINT + PRIMER**

Rust-Oleum® Sure Colour™ Interior Paint & Primer Wall Paint is a user-friendly pre-tinted, paint and primer in one! It's ready to use in any room; it has excellent coverage and outstanding washability.

- **100% Acrylic**
- Highly durable and scrubable
- Great final finish
- Stain resistant
- White Cotton and Charcoal Black available in flat, eggshell and semi-gloss

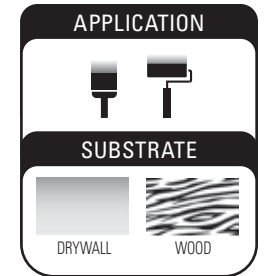

Covers: 37 m²
(400 ft²) per 3.78 L

COLOURS (EGGSHELL) (3.78 L)

- 374125** White Cotton
- 374126** Pebble Grey
- 374127** Artist's Canvas White
- 374128** Stellar Navy
- 374129** Bubble Bath Blue
- 374131** Birchwood Green
- 374133** English Manor Grey
- 374135** Charcoal Black
- 384832** Pampered Yellow
- 384833** Antique White

COLOURS (EGGSHELL) (18.9 L)

- 385624** White Cotton


COLOURS (SEMI-GLOSS) (3.78 L)

- 374134** White Cotton
- 384835** Charcoal Black

COLOURS (FLAT) (3.78 L)

- 374132** White Cotton
- 384834** Charcoal Black
- 385821** White Primer
- 385823** Ceiling White



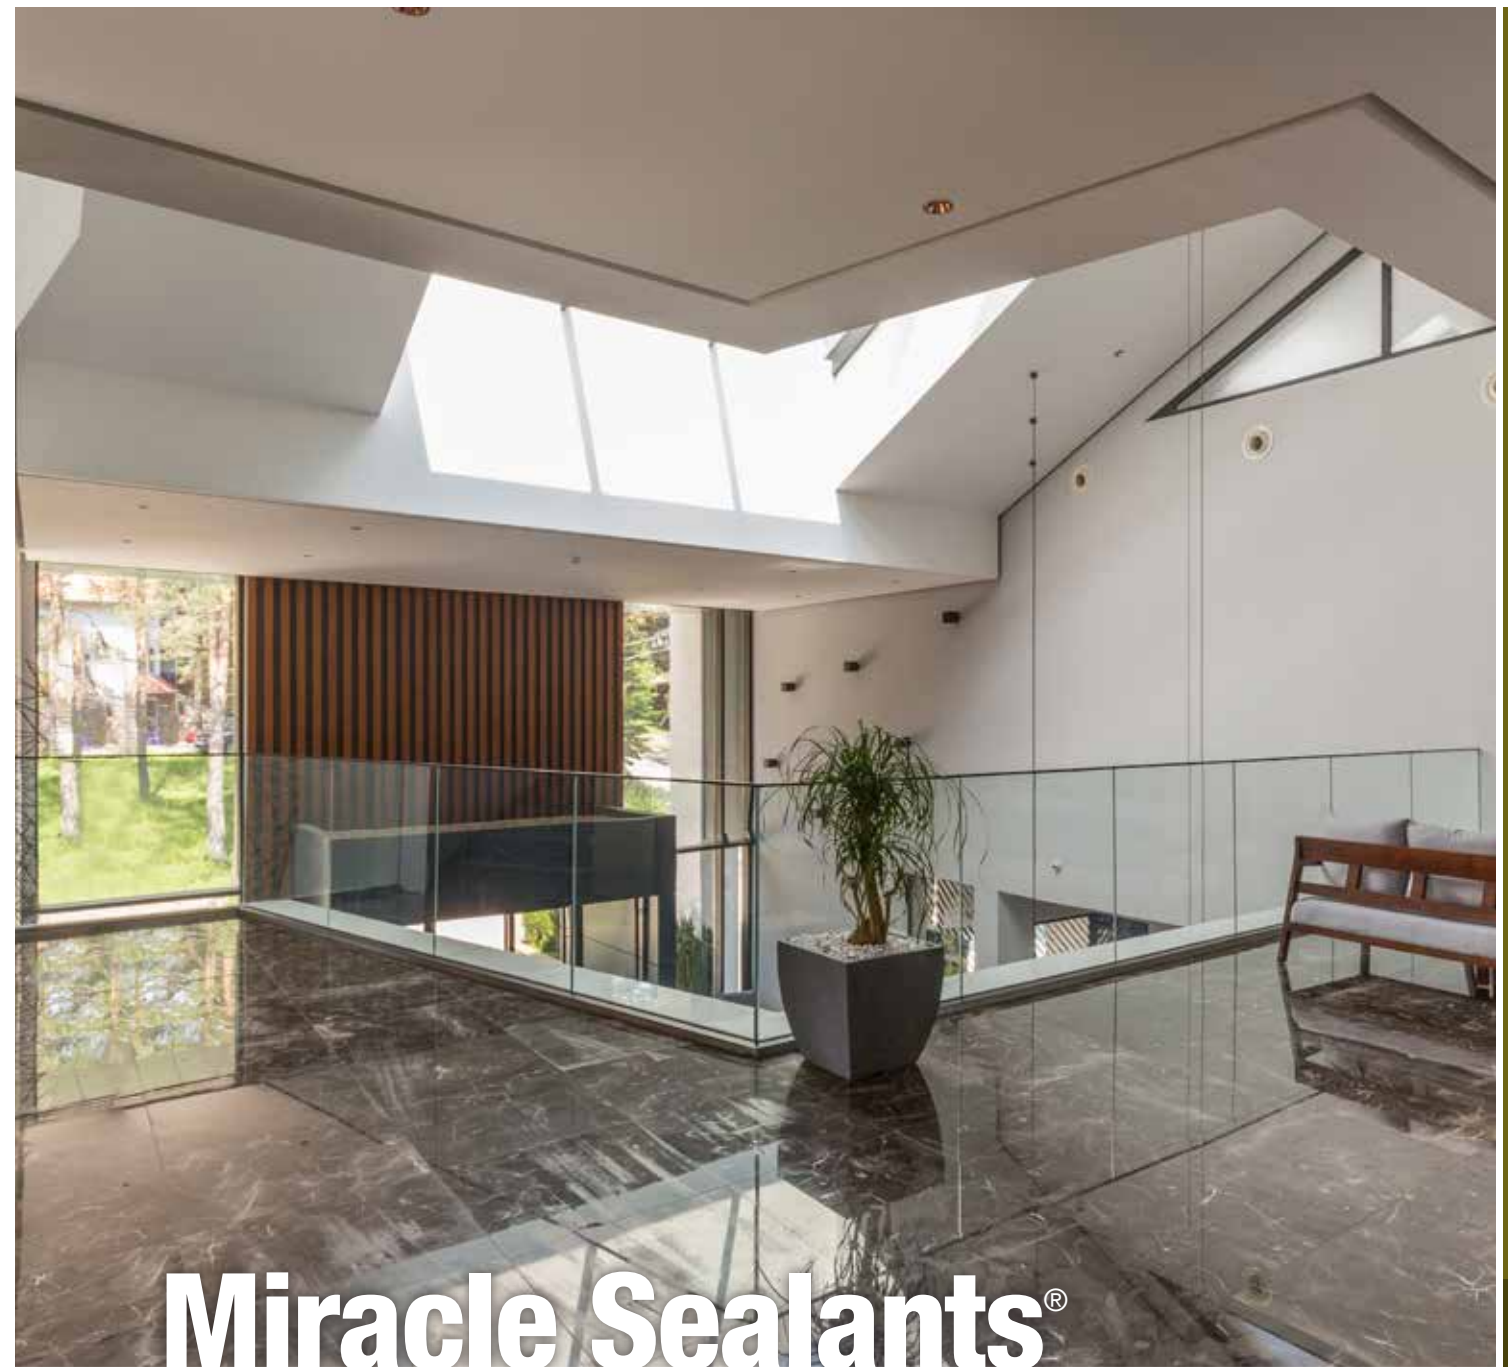

Miracle Sealants®

The leader in professional-grade care and maintenance products for tile, grout, natural stone, brick and masonry surfaces. Premium-quality products rated #1 in performance and quality.




WATER, STAIN & SLIP PROTECTION FOR:

- Grout, quarry tile, ceramic tile, glazed tile, porcelain tile, polished granite, terrazzo, polished marble, stucco, slate, quartz, travertine

MIRACLE SEALANTS® 511 IMPREGNATOR SEALER

The original impregnating sealer designed for the protection of all medium to dense porous surfaces. 511 Impregnator forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. 511 Impregnator is not a surface coating and will not alter the natural look. All surfaces treated are harder and less slippery. Independent laboratory tests show 511 Impregnator outperforms competitive products. (Test results are available upon request)

- **Superior coverage; weather, oil & water resistant**
- UV transparent, will not yellow
- Can be used as grout release
- Safe for food areas; interior/exterior
- **COVERAGE:** Up to 90 m² (1,000 ft²) per 946 mL

AVAILABLE PRODUCTS

346475 473 mL **346476** 946 mL


WATER, STAIN AND SLIP PROTECTION FOR:

- Grout, limestone, saltillo tile, slate, terra cotta, sandstone, flagstone, polished granite, cantera/adoquin, polished marble, flamed & honed granite, honed/textured marble

MIRACLE SEALANTS® 511 POROUS PLUS SEALER

511 Porous Plus is a penetrating sealer designed for the most porous surfaces. 511 Porous Plus forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. 511 Porous Plus is not a surface coating and will not alter the natural look. All surfaces are harder and less slippery. Independent tests show 511 Porous Plus outperforms competitive products. (Test results are available upon request)

- **Superior coverage**
- Weather, oil and water resistant
- UV transparent, will not yellow
- Can be use as grout release
- Safe for food areas; interior/exterior
- **COVERAGE:** Up to 90 m² (1,000 ft²) per 946 mL

AVAILABLE PRODUCTS

346485 236 mL **346486** 473 mL **346487** 946 mL


WATER AND STAIN PROTECTION FOR:

- Grout, quarry tile, ceramic tile, glazed tile, granite, marble, limestone, terrazzo, saltillo tile, slate, flagstone

MIRACLE SEALANTS® 511 H2O PLUS SEALER

A water-based penetrating sealer designed for the protection of all surfaces. 511 H2O Plus is not a surface coating and will not alter the natural look. 511 H2O Plus is VOC compliant and does not produce a strong odour. 511 H2O Plus contains no P.F.O.S. or P.F.O.A. components. Independent tests show 511 H2O Plus to be superior in performance. (Test results are available upon request)

- **Superior stain protection and oil and water resistance**
- Low odour; will not yellow
- Can be use as grout release
- Safe for food areas; interior/exterior
- **COVERAGE:** Up to 137 m² (1,500 ft²) per 3.78 L

AVAILABLE PRODUCTS

346483 946 mL **346482** 3.78 L


WATER, STAIN & SLIP PROTECTION FOR:

- Quartz and engineered stone

MIRACLE SEALANTS® 511 QUARTZ COUNTERTOP SEALER

511 Quartz Counter Top Sealer is an impregnating sealer designed for the protection of all quartz and medium to dense porous surfaces. 511 Quartz Counter Top Sealer forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. 511 Quartz Counter Top Sealer is not a surface coating and will not alter the natural look. All surfaces treated are harder and less slippery.

- **Superior coverage**
- Weather, oil and water resistant
- UV transparent, will not yellow
- Can be use as grout release; safe for food areas; interior/exterior
- **COVERAGE:** Up to 23 m² (250 ft²) per 473 mL

AVAILABLE PRODUCTS

346489 473 mL


WATER AND STAIN PROTECTION FOR:

- All sanded and unsanded cementitious grout joints

MIRACLE SEALANTS® 511 GROUT SEALER AEROSOL

511 Spray-On Grout Sealer is a convenient aerosol spray designed for the protection of all cementitious grout surfaces. It can be applied to the grout before it has dried or cured completely. It forms an invisible barrier that offers maximum stain protection without changing the natural look of the grout. It is recommended for both interior and exterior applications. It utilizes similar technology to the proven 511 Impregnator. Can be used on all cementitious grout within 2-hours of finishing the grout process. It has been tested by Scientific Certification Systems and has received Indoor Advantage Gold Certification.

- **Stain and water resistant**
- Apply same day as grouting
- Safe for food areas; easy-to-use; interior/exterior
- **COVERAGE:** Grout: Up to 76 m² (250 ft²) per spray can

AVAILABLE PRODUCTS

346480 425 mL

SEAL


WATER AND STAIN PROTECTION FOR:

- All sanded and unsanded cementitious grout joints

**MIRACLE SEALANTS®
GROUT SEALER**

Grout Sealer is a sealer designed for the protection of all sanded and non-sanded grout joints. Grout Sealer forms an invisible barrier that is resistant to moisture and stains while allowing vapour to escape. Grout Sealer is not a surface coating and will not alter the natural look. Grout Sealer comes with a unique applicator tip for easy application.

- **Offers superior grout protection**
- Easy to use with applicator tip
- Interior/exterior
- **COVERAGE:** Up to 7 m² (75 ft²) per bottle

AVAILABLE PRODUCTS

346479 177 mL

ENHANCE


READY TO USE SOLVENT BASE IMPREGNATOR/COLOUR ENHANCER FOR:

- Granite, marble, natural stone, slate, limestone, ceramic tile, quarry tile, grout, polished stone – Not for concrete/masonry without testing

**MIRACLE SEALANTS® 511
SEAL & ENHANCE**

511 Seal & Enhance is a unique, solvent-base formula designed to eliminate the need to use an impregnator before using a colour enhancer for maximum stain protection and superior colour enhancement. 511 Seal & Enhance will enhance the colour and rejuvenate the appearance of tumbled, honed, acid-washed, sandblasted, flamed, textured, even polished stone and tile surfaces. In addition, 511 Seal & Enhance revitalizes old and worn stone and tile installations. It can be used successfully in both interior and exterior environments and is freeze/thaw resistant.

- **Superior coverage; best for floors**
- Weather, stain, oil and water resistance; will not yellow
- Can be use as grout release; safe for food areas
- Interior/exterior
- **COVERAGE:** Up to 90 m² (1,000 ft²) per 946 mL

AVAILABLE PRODUCTS

346490 473 mL **346491** 946 mL

CLEAN


SPRAY AND WIPE CLEANER AND RE-SEALER FOR:

- All ceramic tile, porcelain tile, quartz, polished or unpolished natural stone

**MIRACLE SEALANTS® 511
KLEEN & RESEAL**

511 Kleen & Reseal is a unique formula designed to remove dirt and soil from natural stone and tile, including vanities, showers and furniture and reseals in one easy step. 511 Kleen & Reseal will cut through dirt and soil with no rinsing, streaking or soapy residue left behind. 511 Kleen & Reseal is safe for all types of surfaces.

- **Neutral pH is safe for all surfaces**
- Re-seals with each use
- Safe for counters and food areas
- Ready-to-use, no scrubbing
- Contains 511 H2O Plus
- **COVERAGE:** Covers up to 46 m² (500 ft²) per 946 mL. Coverage will vary depending on surface product is used upon.

AVAILABLE PRODUCTS

346484 946 mL


FOR USE ON:

- Granite, non-polished marble, cement, slate, sandstone, brick, flagstone, ceramic tile, masonry, grout, quarry tile, porcelain tile, non-polished natural stone

**MIRACLE SEALANTS®
HEAVY DUTY ACIDIC CLEANER**

Heavy Duty Acidic Cleaner is a fast acting, heavy duty acid cleaner for textured, non-polished, natural and manufactured surfaces. Heavy Duty Acidic Cleaner removes cementitious grout and mortar residue, joint cement, lime and hard water deposits, efflorescence, rust and other heavy dirt and grime.

- **Easy-to-use; fast-acting**
- Interior/exterior
- Dilutable; strong acid
- **COVERAGE:** Approximately 18.5 - 371 m² (200 - 4000 ft²) per 3.78 L with standard dilution

AVAILABLE PRODUCTS

346467 946 mL **346465** 3.78 L

CLEAN



FOR USE ON:

- Concrete, quarry tile, non-polished natural stone, granite, ceramic & porcelain tile, brick, masonry surfaces, grout

**MIRACLE SEALANTS®
PHOSPHORIC ACID CLEANER**

Cleaning for cast surfaces including pre-cast concrete, non-polished natural surfaces including flamed and honed granite, tumbled and honed marble, cleft and honed slate, quarry tile, flamed and honed limestone, unglazed ceramic tile, porcelain tile, cement grout, brick, concrete, mortar and masonry. Removes cementitious grout residue and dirt build up.

• **Fast-acting; easy-to-use**

- Milder than other acidic cleaners
- Dilutable
- Interior/exterior
- **COVERAGE:** Up to 277 m² (2,500 ft²) per 3.78 L

AVAILABLE PRODUCTS

346470 946 mL



FOR USE ON:

- Granite, marble, limestone, travertine, natural stone, ceramic tile, quarry tile, grout, porcelain tile, slate

**MIRACLE SEALANTS®
TILE & STONE CLEANER**

Tile & Stone Cleaner is a pH neutral cleaner designed for all tile, stone, grout and masonry surfaces. Strong enough for the professional, yet gentle enough for the do-it-yourself specialist. Tile & Stone Cleaner is a nontoxic cleaner that can handle the most difficult stains, yet is gentle enough for everyday use. It comes in both a ready to use spray and a concentrate for diluting options.

• **Safe for food areas**

- One product = Multiple uses
- No odour; safe for regular use
- Easy-to-use
- **COVERAGE:** Up to 909 m² (10,000 ft²) per 3.78 L

AVAILABLE PRODUCTS

346473 946 mL **346472** 3.78 L

ACCESSORIES



FOR USE WITH:

- Miracle Sealants repellents and sealants

**MIRACLE SEALANTS®
MIRA BRUSH APPLICATOR**

The Mira Brush is a unique hand applicator designed for use with Miracle Sealants repellents and sealants. A foam reservoir disperses solution evenly onto the surface. In addition, a convenient applicator tray for ease of application.

AVAILABLE PRODUCTS

346494 Applicator

